

Evaluation of Potential Impingement and Entrainment Associated with the Intake Structure for the Proposed Harbor Island Desalination Facility

Prepared for
Port of Corpus Christi Authority of Nueces County, Texas
400 Harbor Drive
Corpus Christi, TX 78401

Prepared by
The logo for Integral Consulting Inc. features the word "integral" in a blue, lowercase, sans-serif font. A vertical line runs through the letter "l". Below "integral" is the text "consulting inc." in a smaller, blue, lowercase, sans-serif font. A curved line underlines the word "integral".
8550 United Plaza Blvd.
Suite 702
Baton Rouge, LA 70809

February 9, 2023

CONTENTS

LIST OF FIGURES	iv
LIST OF TABLES	v
ACRONYMS AND ABBREVIATIONS	vi
EXECUTIVE SUMMARY	viii
1 INTRODUCTION	1-1
1.1 GENERAL SITE LOCATION.....	1-2
1.2 REPORT OUTLINE.....	1-2
2 SOURCE WATER DATA	2-1
2.1 PHYSICAL CONDITIONS AND SALINITIES.....	2-1
2.1.1 Depth.....	2-1
2.1.2 Salinity.....	2-2
2.1.3 Temperature.....	2-2
2.2 HYDROLOGICAL AND GEOMORPHOLOGICAL CONDITIONS IN THE GULF OF MEXICO AROUND THE PROJECT AREA.....	2-3
2.2.1 Hydrology.....	2-3
2.2.2 Geomorphology.....	2-4
3 STATE WATER INTAKE STRUCTURE	3-1
3.1 GENERAL DESCRIPTION.....	3-1
3.2 OPERATION.....	3-1
3.3 HYDRAULIC ZONE OF INFLUENCE.....	3-3
3.3.1 Regional Perspective.....	3-3
3.3.2 Additional Considerations.....	3-7
4 SOURCE WATER BIOLOGICAL CHARACTERIZATION	4-1
4.1 SPECIES PRESENCE IN THE VICINITY OF THE PROJECT AREA.....	4-1
4.2 SPECIALLY MANAGED FISH SPECIES.....	4-2
4.3 SELECTING TARGET SPECIES POTENTIALLY SUSCEPTIBLE TO I&E.....	4-4
4.3.1 T&E Species.....	4-5
4.3.2 Fragile Species.....	4-9
4.3.3 Abundant, Frequently Impinged, and Commercially and/or Recreationally Important Species.....	4-10

4.4	REPRODUCTION, LARVAL RECRUITMENT, AND PERIOD OF PEAK ABUNDANCE FOR TARGET SPECIES	4-12
4.5	DOCUMENTATION OF CORRESPONDENCE WITH STATE AND FEDERAL AGENCIES.....	4-12
5	EVALUATION OF I&E POTENTIAL	5-1
5.1	INTRODUCTION.....	5-1
5.2	SPECIFIC POTENTIAL FOR I&E	5-1
5.2.1	Potential I&E of MFS and HMS.....	5-2
5.2.2	Potential I&E of T&E Species.....	5-3
5.2.3	Potential I&E of the 11 Target Species.....	5-8
5.2.4	I&E Studies in Texas	5-12
5.3	POTENTIAL FOR POPULATION-LEVEL EFFECTS	5-15
5.4	SUMMARY AND CONCLUSIONS.....	5-16
6	REFERENCES.....	6-1
Appendix A.	Comprehensive List of Fish and Invertebrate Species that May Occur in the Gulf of Mexico around the Project Area	
Appendix B.	Abundant Species Based on Catch Data	
Appendix C.	Correspondence with State Agency	

LIST OF FIGURES

- Figure 1-1. Approximate Locations of the Proposed Desalination Facility, the State Water Intake Structure, and the Intake Tunnel
- Figure 2-1. Locations of the Three Monitoring Buoys Used to Obtain Measured Data on Surface Water Levels, Salinities, Temperatures, and Tidal Currents
- Figure 2-2. Surface Water Levels Measured in the Gulf of Mexico at Aransas Inlet Between 2017 and 2022
- Figure 2-3. Monthly Variations in the Surface Water Salinities Measured in the Gulf of Mexico at Aransas Inlet Between 1989 and 2022
- Figure 2-4. Surface Salinities Measured in the Gulf of Mexico at the TABS Buoy D between 2010 and 2019
- Figure 2-5. Range of Monthly Surface Salinities Measured in the Gulf of Mexico at TABS Buoy D between 2011 and 2019
- Figure 2-6. Monthly Variations in Surface Water Temperatures Measured in the Gulf of Mexico at Aransas Inlet Between 1989 and 2022
- Figure 2-7. Surface Temperatures Measured in the Gulf of Mexico at the TABS Buoy D between 2010 and 2019
- Figure 2-8. Range of Monthly Surface Temperatures Measured in the Gulf of Mexico at TABS Buoy D between 2011 and 2019
- Figure 2-9. Velocity Rose Showing Variations in the Speed, Magnitude, and Flow Direction of the Tidal Currents Measured in the Gulf of Mexico at the TABS-D Buoy over a 27-year Period
- Figure 2-10. Range of Monthly Velocity Magnitudes Measured in the Gulf of Mexico at TABS Buoy D over a 27-year period
- Figure 2-11. Monthly Variations in the Speed, Magnitude, and Direction of the Tidal Currents Measured in the Gulf of Mexico at the TABS-D Buoy over a 27-year period
- Figure 2-12. General Substrate Composition in the Gulf of Mexico Outside of the Aransas Inlet
- Figure 3-1. Intake and Manifold Plan
- Figure 3-2. Location of the Proposed State Water Intake Structure with the Three Volumetric Boxes
- Figure 4-1. Essential Fish Habitat, Harbor Island Desalination Facility, Port Aransas, Texas
- Figure 4-2. Reported Presence of Threatened and Endangered Marine Species, Harbor Island Desalination Facility, Port Aransas, Texas

LIST OF TABLES

- Table 3-1. Volumetric Calculations
- Table 3-2. Ichthyoplankton Density Comparisons among Volumetric Boxes
- Table 4-1. Managed Fish Species in the Vicinity of Project Area by Life Stage
- Table 4-2. Highly Migratory Fish Species in the Vicinity of the Project Area by Life Stage
- Table 4-3. Threatened and Endangered Marine Species that May Occur in the Vicinity of the Project Area
- Table 4-4. Summary of Sea Turtle Life Histories
- Table 4-5. Abundant and Common Species in the Vicinity of the Project Area Based on NOAA Catch Data
- Table 4-6. Abundant and Common Species in the Vicinity of the Project Area Based on TPWD Catch Data
- Table 4-7. Abundant, Frequently Impinged, and Commercially and/or Recreationally Important Species
- Table 4-8. General Life History Traits of the 11 Target Fish and Invertebrate Species Susceptible to Impingement and Entrainment
- Table 5-1. Potential for Impingement and Entrainment by Four Key Life Stages of the 11 Target Fish and Invertebrate Species
- Table 5-2. Summary of Coastal Texas Impingement Studies
- Table 5-3. Fecundity of Several Target Species

ACRONYMS AND ABBREVIATIONS

AUF	area use factor
bgd	billion gallons per day
CCSC	Corpus Christi Ship Channel
CWIS	cooling water intake structure
EFH	essential fish habitat
ELS	early life stages
EPA	U.S. Environmental Protection Agency
ESA	Endangered Species Act
GCOOS	Gulf Coast Ocean Observing System
GMFMC	Gulf of Mexico Fishery Management Council
GOM	Gulf of Mexico
HMS	highly migratory species
HYCOM	Hybrid Coordinate Ocean Model
I&E	impingement and entrainment
IPAC	Information for Planning and Consultation
IQR	interquartile range
MFS	managed fish species
mgd	million gallons per day
MSFCMA	Magnuson-Stevens Fishery Conservation and Management Act
NAVD88	North American Vertical Datum of 1988
NMFS	National Marine Fisheries Service
NOAA	National Oceanic and Atmospheric Administration
Port Authority	Port of Corpus Christi Authority of Nueces County, Texas
PINS	Padre Island National Seashore
ppt	part per thousand
SCL	straight carapace length
SEAMAP	Southeast Area Monitoring and Assessment Program
T&E	threatened and endangered

TABS	Texas Automated Buoy System
TAC	Texas Administrative Code
TCEQ	Texas Commission on Environmental Quality
TL	total length
TPWD	Texas Parks and Wildlife Department
TXGLO	Texas General Land Office
TXNDD	Texas Natural Diversity Database

EXECUTIVE SUMMARY

This report evaluates the potential for impingement and entrainment (I&E) of marine life due to the operation of a State Water from Gulf of Mexico¹ intake structure (“intake structure” or “project area”) located in the Gulf of Mexico (GOM) approximately 1.3 miles from San Jose Island in Nueces County, Texas. This intake structure will provide feed water to a proposed desalination facility to be built on Harbor Island adjacent to the Corpus Christi Ship Channel (CCSC). Prior to entering the desalination facility, this feed water will flow through traveling screens designed to collect marine life before returning them to the Aransas Channel. The evaluation of potential I&E for this facility is, by default, qualitative because the facility does not yet exist and site-specific I&E data are not available. The evaluation proceeds as follows:

- Describe the major physical variables and salinities in the GOM Offshore² of San Jose Island. These variables consist of depth, substrate composition, seasonal water temperature profiles, and the prevailing direction and intensity of the tidal currents. These features determine the kinds of marine species that may live, feed, migrate, or spawn in the vicinity of the project area. (Note: “the vicinity of the project area” is defined for the purpose of this report as a 1.5- by 1.5-mile square centered on the location of the intake structure).
- Describe the intake structure located in the GOM. This intake structure is comprised of four or five velocity caps, risers and lateral pipes, and a manifold connecting the caps to a sub-sea intake tunnel to Harbor Island. The description covers major operational considerations regarding height of the water intakes, height of the velocity caps above the GOM sea bed and below the GOM surface, volume of State Water to be diverted, velocity of the State Water at the velocity caps’ entrances, hydraulic zone of influence, and the proposed screening system at the proposed Harbor Island facility. The evaluation includes a simple volumetric comparison to provide a broader perspective on the potential intake of ichthyoplankton when viewed on a larger spatial scale. The analysis shows that the number of ichthyoplankton in the vicinity of the project area is anticipated to be between 100,000 and 1,000,000 times higher than the ichthyoplankton that may be present within the velocity caps. This analysis should be viewed as conservative for those species with positively buoyant or demersal early life stages that are unlikely to interact with the intake structure due to their position at the top or the bottom of the water column. The conclusion is that any incidental withdrawal of ichthyoplankton by the intake structure

¹ For purposes of this report, the term State Water from Gulf of Mexico (“State Water”) means water derived from the Gulf of Mexico or a bay or arm of the Gulf of Mexico. This term may differ from the same or similar terms as used in the Texas Water Code, Texas Administrative Code, or other laws or rules.

² For purposes of this report, the term “Offshore” means the area of the Gulf of Mexico beyond the Texas Gulf shoreline, excluding a bay or arm of the Gulf of Mexico. This term may differ from the same or similar terms as used in the Texas Water Code, Texas Administrative Code, or other laws or rules.

should be considered minor relative to the vastly greater numbers of fish eggs and larvae in the vicinity of the project area.

- Identify and describe the species and their life stages likely to be in the GOM Offshore of San Jose Island. This process describes not only what species may occur (over 600), but also particular species of concern; including threatened and endangered species, highly migratory species, managed fish species, commercially important species, and recreationally important species. Eleven target species of fish and invertebrates were selected to provide a more detailed evaluation of the intake structure's potential impacts, if any, upon these selected groups of species. Finally, the information is combined to perform an evaluation on the potential for I&E of these various groups of species.
- The results of this assessment can be summarized as follows:
 - Of the 28 threatened and endangered species that may be in proximity of the velocity caps, the neritic (i.e., residing over the shallow continental shelf) juveniles of the five species of endangered sea turtles have some increased relative potential for I&E in the absence of mitigating measures. This potential is estimated to be minimal based on an area use factor (AUF) approach that considers the relatively large home range of the neritic sea turtles as compared to the small area occupied by the velocity caps.
 - Because of the sea turtles' protected status, the velocity cap openings will be shielded with bar screens to prevent juvenile turtles from entering the intake structure. This solution will also preclude adult sea turtles from entering the intake structure.
 - Only 1 of the 10 highly migratory species (i.e., sailfish) has eggs and larvae that might potentially be drawn into the intake structure, but those early life stages do not occur in the vicinity of the project area. The remaining nine highly migratory species that may be present in the vicinity of the project area are all sharks that give birth to fully formed and strongly swimming pups that are unlikely to experience I&E.
 - The majority of the 17 managed fish species that may potentially be present in the vicinity of the project area, as well as all of the 11 target species of fish and invertebrates, have one or more early life stages that show potential for I&E. However, withdrawals of these life stages into the intake structure will be relatively small compared to the great number of eggs and larvae (several orders of magnitude higher) present in the vicinity of the project area that will not interact at all with the intake structure.

The following components will be implemented based on all these considerations: a) place the water intake structure approximately 1.3 miles in the GOM at 5 to 10 ft above the sea bed in approximately 35 ft of water to limit interaction with marine life, b) set the entrance velocity at the velocity caps to ≤ 0.5 ft/s to reduce the potential withdrawal of eggs and larvae, c) enclose the

velocity caps with 3-in. mesh size bar screens to prevent incidental entrance by juvenile and adult sea turtles (as well as larger fish), and d) use traveling screens at the proposed desalination facility to support survival.

1 INTRODUCTION

This report describes the potential for impingement and entrainment (I&E) of marine life that may occur due to the operation of a State Water from Gulf of Mexico (“State Water”)³ intake structure (“intake structure” or “project area”) located in the Gulf of Mexico (GOM) approximately 1.3 miles Offshore⁴ from San Jose Island in Nueces County, Texas. The intake structure will divert State Water to a proposed desalination facility to be built on Harbor Island adjacent to the Corpus Christi Ship Channel (CCSC). The evaluation of the potential for I&E for this proposed facility is, by default, qualitative because the facility does not yet exist and site-specific I&E data are therefore not available.

This report uses the U.S. Environmental Protection Agency (EPA) cooling water intake structure (CWIS) regulatory framework, and the scientific rationale used to develop that framework, to assess the I&E potential at the proposed Harbor Island facility. The reason is the similarities that exist between CWIS in marine environments and the anticipated infrastructure that will be deployed at the facility. It is understood that EPA’s CWIS regulations do not apply to the proposed Harbor Island facility, but they provide a useful analytical framework due to similarities in the way the intake structures operate. This report also uses the more generic term “I&E” when addressing the consequences of all fauna that may potentially be withdrawn by the intake structure in the GOM.

Though not directly applicable to the proposed intake structure in the GOM, EPA regulations pertaining to CWIS provide the following definitions for I&E:

- **Impingement:** The entrapment of any life stages of fish and shellfish on the outer part of an intake structure or against a screening device during periods of intake water withdrawal.⁵
- **Entrainment:** Any life stages of fish and shellfish in the intake water flow entering and passing through a CWIS and into a cooling water system, including the condenser or heat exchanger.⁶ (Note: this definition calls out specific CWIS infrastructure, but the principles of entrainment—i.e., passage through a screening device—are the same for desalination facilities.)

³ For purposes of this report, the term “State Water” means water derived from the Gulf of Mexico or a bay or arm of the Gulf of Mexico. This term may differ from the same or similar terms as used in the Texas Water Code, Texas Administrative Code, or other laws or rules.

⁴ For purposes of this report, the term “Offshore” means the area of the Gulf of Mexico beyond the Texas Gulf shoreline, excluding a bay or arm of the Gulf of Mexico. This term may differ from the same or similar terms as used in the Texas Water Code, Texas Administrative Code, or other laws or rules.

⁵ 40 CFR 125.92(n)

⁶ 40 CFR 125.92(h)

This section describes the general site location, the overall approach used to assess the potential for I&E by marine life in the GOM, and the report outline.

1.1 GENERAL SITE LOCATION

The Port of Corpus Christi Authority (Port Authority) is proposing to build a State Water desalination facility on Harbor Island adjacent to the CCSC across from Port Aransas, Nueces County, Texas. The Port Authority is also working to obtain a water rights permit from the Texas Commission on Environmental Quality (TCEQ) to gain permission to divert 156 million gallons per day (mgd) (expandable to 312 mgd in the future) of State Water from an area in the GOM located approximately 1.5 miles to the northeast of the entrance to the Aransas Inlet jetty for use in desalination. **Figure 1-1** shows the general location of the proposed Harbor Island desalination facility, the intake structure (also defined as “the project area”), the vicinity of the project area (note: “the vicinity of the project area” is defined for the purpose of this report as a 1.5- by 1.5-mile square centered on the location of the intake structure), and the intake tunnel that will bring State Water from the intake structure to the desalination facility.

This report characterizes the potential for I&E of marine life that may be present in the vicinity of the project area. Such an evaluation requires detailed information on key components, such as salinity, major physical characteristics of the proposed location (e.g., water temperature, depth, substrate composition, tidal currents), general biological diversity, commercial and recreational fisheries, life stage considerations (e.g., reproductive strategies), and presence of state or federal listed species. An additional line of evidence consists of reviewing I&E data reported by other facilities located in Texas in or near the GOM that withdraw surface water for cooling purposes. All of this information is publicly available online.

The goal of this effort is to describe the potential for and extent of I&E that might occur as a result of the proposed diversion of State Water from the project area for use in desalination. That assessment is based on a review of broad environmental conditions, the life histories of target species with sensitive life stages (e.g., presence of ichthyoplankton in the GOM), and a general understanding of the design and operation of the intake structure itself.

1.2 REPORT OUTLINE

The remainder of the report is organized as follows:

- Section 2 describes the major physical characteristics, salinities, and the prevailing hydrology and geomorphology expected in the GOM Offshore of San Jose Island.
- Section 3 describes the intake structure in terms of its location, various design features, and expected function. It also assesses the hydraulic zone of influence of the intake structure’s velocity caps, and evaluates that information in a broader biological context.

- Section 4 describes the major biological characteristics of marine life that may be present in the vicinity of the project area. This information includes a list of expected species of zooplankton, other invertebrates, and fish; the presence of threatened and endangered (T&E) species and species of special concern; and 11 targeted species of invertebrates and fish specifically selected for a detailed life history analysis to assess their potential for I&E.
- Section 5 evaluates the potential for I&E by the various groups of species presented in the previous section.
- Section 6 lists the references cited in this report.

2 SOURCE WATER DATA

This section describes the physical characteristics, range of salinities, and hydrological and geomorphological conditions of the coastal waters at or near the project area.

The National Oceanic and Atmospheric Administration (NOAA) collects water-level data from monitoring Station 8775241 located in the GOM at the Aransas Inlet. TCEQ collects salinity and water temperature data from monitoring Station 13468, also located in the GOM at the Aransas Inlet. Additional data were obtained from metocean Buoy D of the Texas Automated Buoy System (TABS) maintained by Texas A&M University in partnership with the Texas General Land Office (TXGLO) (see **Figure 2-1** for the buoy locations). Data from the TABS buoy was sourced through the Gulf Coast Ocean Observing System (GCOOS⁷). Aransas Inlet with the NOAA and TCEQ monitoring stations lies approximately 1.5 miles to the southwest of the project area. The TABS Buoy D is found approximately 12 miles to the northeast of the project area and 6.3 miles Offshore in the GOM. Of note, the depth of the salinity sensor on the TABS buoy is unknown, but is assumed to be located at the same depth as the temperature sensor, which is placed 6.6 ft below the surface. Both the salinity and temperature data collected from the TABS buoy are referred to below as surface salinities and surface temperatures.

2.1 PHYSICAL CONDITIONS AND SALINITIES

The following sections outline the range of physical conditions and salinities observed around the project area based on field-collected data.

2.1.1 Depth

The mean depth at the location of the intake structure is approximately 35 ft. Tides and storm events will cause the ocean surface elevations to vary. Stated tidal datums extend +0.49 ft at mean high water to -0.62 ft at mean low water relative to the North American Vertical Datum of 1988 (NAVD88).⁸ The graph on the left in **Figure 2-2** shows the available raw water levels from NOAA monitoring Station 8775241 in the GOM at Aransas Inlet relative to the mean surface level for measurements taken every 6 minutes between 2016 and 2022.⁹ The measured water elevations highlight the range of water levels experienced in the vicinity of the project area. These data indicate that water levels tend to be above the mean sea level elevation. This apparent deviation from the norm could be due to localized winds creating a water level set-up. The panel on the right in **Figure 2-2** is a box-and-whisker chart showing the median level;

⁷ <https://data.gcoos.org/>

⁸ <https://tidesandcurrents.noaa.gov/datums.html?datum=MSL&units=0&epoch=0&id=8775241&name=Aransas%2C+Aransas+Pass&state=TX>

⁹ <https://tidesandcurrents.noaa.gov/stationhome.html?id=8775241>

elevations of the 25th and 75th quartile, between which 50% of the data fall; outliers; and minimum and maximum values (shown by the whiskers) that are not considered outliers. The difference between the 75th and 25th quartile is called the interquartile range (IQR). Outliers are defined as either greater than $1.5 \times \text{IQR} + 75\text{th percentile}$ or less than $25\text{th percentile} - 1.5 \times \text{IQR}$.

2.1.2 Salinity

TCEQ collected 380 salinity measurements from monitoring Station 13468 in the GOM at the Aransas Inlet at uneven time intervals from 1989 through 2022. TCEQ obtained readings both at the surface and as profiles within the water column, depending on the prevailing conditions at the time of measurement. The reported salinities (individual and profile combined) range from a low of 14 parts per thousand (ppt) in February of 2003 to a high of 42.2 ppt in August of 2001. The mean salinity across depth over the 42-year monitoring period is 30.14 ppt, with a median of 30.75 ppt. The large salinity variations may be attributed to the influence of tidally-driven water exchanges between the Corpus Christi Bay/Aransas Bay system and the nearby GOM via the Aransas Inlet. By itself, this salinity profile may not fully reflect the actual conditions at the project area. **Figure 2-3** summarizes the monthly variations in the surface water salinities in the GOM at the Aransas Inlet between 1989 and 2022.

The TABS Buoy D farther out in the GOM measured surface salinities between 2011 and 2019 at 30-minute intervals, but with intermittent disruptions that produced data gaps of various lengths. Surface salinities ranged from below 20 ppt to above 36 ppt (**Figure 2-4**). Low surface salinities that far out in the GOM could be due to periodic heavy rainfalls that temporarily dilute the prevailing salinity levels near the surface. Regardless, the data show marked seasonal fluctuations, with the highest surface salinities systematically measured during the summer months. **Figure 2-5** presents ranges of monthly surface salinities at TABS Buoy D. The box and whiskers are derived from the data for each month across the 10+ year record. Spurious outliers were removed from the data set during the data quality review process.

The salinity data collected in the GOM both at Aransas Inlet and 6.3 miles from shore bound the project area to the north and the south and indicate that salinities could range from below 20 ppt to above 40 ppt, but with average salinities in the low- to mid-30 ppt.

2.1.3 Temperature

TCEQ obtained 536 water temperature readings intermittently between 1969 and 2022 from the same station in the GOM at the Aransas Inlet as the salinity measurements. **Figure 2-6** summarizes the monthly variations in the surface water temperatures over the monitoring period in the GOM at the Aransas Inlet. Depending on site conditions, these values represent a composite of single-point measurements or vertical profiles throughout the water column. Based on the data set, the water temperatures across all depths ranged from a low of 10.1°C in January 2010 to a high of 31.3°C in August 2007. The mean water temperature equals 22.5°C,

with a median temperature of 22.8°C. These large temperature ranges at the Aransas Inlet may not fully reflect the actual conditions around the project area.

TABS Buoy D farther out in the GOM has collected water temperatures at 30-minute intervals since 1995, but with periodic disruptions. The sensor is located about 6.6 ft below the surface. Therefore, for this report, the data are considered to represent water temperatures at the surface. The data show a strong seasonal pattern, with the highest summer temperatures reaching above 30°C (86°F) and the lowest winter temperatures dropping close to or below 10°C (50°F) (**Figures 2-7 and 2-8**). Data are not presented for 2010 and 2011 and were removed along with outliers deemed to be caused by instrument failure or aberrant data patterns identified during the quality control process.

The TCEQ and TABS temperature data sets suggest that the GOM water temperatures experience similar seasonal ranges, with maximum values at both locations exceeding 30°C and minimum values around 10°C.

2.2 HYDROLOGICAL AND GEOMORPHOLOGICAL CONDITIONS IN THE GULF OF MEXICO AROUND THE PROJECT AREA

The prevailing tidal currents and substrate composition are two important variables that can affect the movement of zooplankton through the water column and the presence or absence of certain species of fish or invertebrates that have specific habitat requirements. These two variables are further discussed below.

2.2.1 Hydrology

Researchers from Texas A&M University collected hydrodynamic data from the Bob Hall Pier located in the GOM across from North Padre Island to characterize tidal currents along the coast (Tissott et al. 2015). These researchers deployed acoustic doppler current profilers to capture a range of velocities extending away from the pier. Johnson (2008) also characterized current patterns within the GOM; however, at the time of this writing, access to the data collected and characterized in those studies was not available to make inferences about the project area.

Hydrodynamic conditions are governed by tides and regional circulation patterns. The project area will be located approximately 1.3 miles from the shore. This proximity to the coast limits the direction that currents can travel in that general area and causes the internal mixing processes to produce relatively uniform properties within the water column. Tidal conditions in the project area are predominantly alongshore following the angle of the coast.

Hydrodynamic current data from the TABS Buoy D, located to the northeast of the project site, were analyzed for this study and indicate predominant directions aligning with the coast

northeast (50°) or southwest (217°) (**Figure 2-9**). The TABS Buoy D current data are collected 6.6 ft below the surface and have been reported every 30 minutes over a 27-year period. Velocities ranged in magnitude from 0 m/s during slack tide to greater than 0.8 m/s, and in outlier cases exceed 1 m/s. Median current speeds varied by month (**Figure 2-10**). Median values exceeded the intake velocity in all months but August. **Figure 2-11** shows that current direction also varied by month. The predominant current direction is to the southwest in the winter, transitioning to the northeast in the summer and back to the southwest in the fall. As with the temperature and salinity data, the velocity data went through a quality control process to remove anomalous data prior to analysis.

2.2.2 Geomorphology

The location of the intake structure is approximately 1.3 miles from shore, in an area of the GOM characterized as relatively flat, with gradual bathymetric change as distance from shore increases. Bed sediment is predominantly sand in the vicinity of the project area (**Figure 2-12**). For reference, sand has a nominal grain size of 62.4 to 2,000 microns whereas silts and clays have grain sizes below 62.4 microns. In deeper areas beyond the project area, bed conditions transition to a mixture of sand and finer materials, including silt and clay.

3 STATE WATER INTAKE STRUCTURE

This section describes the intake structure that will be used to divert State Water from the GOM for treatment in the proposed desalination facility on Harbor Island. Even though the final design is not yet available, the performance is expected to be consistent with the following descriptions.

3.1 GENERAL DESCRIPTION

The proposed desalination facility on Harbor Island will require up to 156 mgd of State Water initially, and could be expanded to up to 312 mgd in the future. The intake structure provides entrances for State Water diversion from the GOM. That water is then drawn through an intake tunnel to a pipeline exit well near the Harbor Island desalination facility to serve as feed stock to produce fresh water. As shown in **Figure 1-1**, the project area will be located approximately 1.3 miles from shore, and approximately 1.5 miles to the northeast of the Aransas Inlet jetty. The sea bed at the proposed location is approximately 35 ft deep below mean lower low water, and the intake structure placement will allow for about 20 to 25 ft of water overlying the velocity caps, depending on the final height of the five vertical riser pipes.

EPA considers water intakes placed 410 ft outside of the littoral zone to be a good engineering practice to reduce I&E (USEPA 2000, 2014). The littoral zone extends 600 ft from the shore, resulting in a distance of at least 1,010 ft from the shore available to help reduce environmental impacts (USEPA 2000, 2014; WateReuse Association 2011). Installing intakes to depths that have lower abundance of marine life has also been suggested to decrease environmental impacts associated with intake operations (USEPA 2014; WateReuse Association 2011). The proposed intake structure would be located well beyond 1,010 ft from shore and at depths that will help reduce interaction with marine life.

3.2 OPERATION

Based on available design considerations and calculations, the intake structure is planned to have the following general features.

- Water will be diverted from the GOM via four or five evenly spread, 5-ft-diameter vertical riser pipes (each affixed with a velocity cap), located a minimum of 30 ft apart and organized in a radial arrangement to generate an even flow distribution without interference from each other. All the water will converge via individual 5-ft-diameter suction headers into a common suction manifold (see **Figure 3-1**). From the common manifold, the State Water will flow via a single, large-diameter, 3.1-mile-long intake

tunnel to the proposed desalination facility. All the intake piping is planned to be placed underground with only the velocity caps and 5 to 10 ft of vertical riser above the sea bed.

- The water velocity at the point of entrance into the velocity caps will be ≤ 0.5 ft/s. The water in the intake tunnel will flow at a maximum volume of approximately 242 ft³/s and an estimated speed of between 2 and 4 ft/s at full capacity. At these velocities, and based on the 3.1-mile length of the intake tunnel, the State Water will take between 1 hour and 8 minutes and 2 hours and 16 minutes to travel from the location of the velocity caps to the pipeline exit well on Harbor Island.
- The entrances of the velocity caps will be placed from 5 to 10 ft above the sea bed to minimize the withdrawal of sediment particles or benthic marine life from below.
- Each vertical riser pipe will be fitted with a velocity cap approximately 16 ft in diameter and 5 ft in height. This structure is designed to minimize the withdrawal of juvenile and adult life stages of marine life present in the water column. A velocity cap is a horizontal cover placed over an intake pipe that redirects vertical flow into a more horizontal flow (USEPA 2011). Juvenile and adult fish have difficulty detecting, and therefore avoiding, vertically oriented currents but readily perceive horizontal flows. Hence, fish can easily swim away from a horizontal current field, thereby reducing the probability of being withdrawn by a water intake. Early life stages (ELS) of free-floating eggs and larvae cannot distinguish flow characteristics and also lack the swimming ability to avoid being withdrawn by the intake. However, a velocity cap minimizes the withdrawal of eggs and larvae that may be present above or below the entrances by changing the flow direction so that water is not pulled vertically. EPA considers that water intakes located away from shore and fitted with velocity caps meet the impingement performance requirements of the Clean Water Act Section 316(b) 2014 Phase II Rule for Existing Facilities, defined as an annual reduction in impingement mortality of 76% or greater (see 40 CFR § 125.94(C)(4)). While not directly applicable to the proposed desalination facility, EPA's regulatory framework for CWIS provides useful guidance for evaluating the potential for I&E at the proposed desalination facility.
- The withdrawal velocity at each velocity cap entrance will be engineered to be ≤ 0.5 ft/s in order to be consistent with EPA regulatory requirements for I&E for similar facilities in other contexts.¹⁰
- Three-inch mesh bar screens will be installed at the velocity cap entrances to prevent neritic juvenile sea turtles from entering the intake structure (see Sections 4 and 5 for more details on this subject). These bars will also prevent adult sea turtles and large fish from entering the velocity caps.

¹⁰ <https://www.ecfr.gov/current/title-40/chapter-I/subchapter-D/part-125/subpart-J/section-125.94>

- Some of the small marine life entering the intake structure may be carried through the intake tunnel to the pipeline exit well that supplies feed State Water to the proposed Harbor Island desalination facility.
- On Harbor Island, all incoming State Water will pass through a system designed to collect marine life and debris before the State Water is processed for desalination. This system may consist of up to four vertical traveling screens containing revolving wire mesh panels with 2- to 6-mm openings. The screens collect and remove marine life and debris as the wire mesh panels rise out of the water. Fish baskets are installed on the screens to humanely capture marine life as they are lifted from the State Water. The screens will be equipped with low-pressure jet sprays to gently discharge marine life to the fish baskets and troughs from where they are sluiced to Aransas Channel. After the marine life is collected, high-pressure jet sprays remove any debris from the screens in a separate follow-up process.

3.3 HYDRAULIC ZONE OF INFLUENCE

3.3.1 Regional Perspective

It is important to place the intake structure, and the potential withdrawal of eggs and larvae by this structure, in a broader context.

Figure 3-2 shows the location of the intake structure in the GOM at 27.850873 N, 97.017401 W in the form of a 100- by 100-ft square, which generically represents the footprint of this intake structure. To provide scale, this figure includes three larger defined areas centered on the project area, with the following dimensions: a) 0.5- by 0.5-mile, b) 1 by 1-mile, and c) 1.5- by 1.5-mile squares. All four squares are rotated 27° from the state plane grid to run parallel to the shoreline.

At any one point in time, the volume of water (and its associated marine life) available to enter the intake structure is the volume of water present within each of the five velocity caps.¹¹ In other words, only the water present within the five velocity caps is the volume of interest. Each velocity cap represents a cylinder 5 ft high and 16 ft, 5 in. (= 16.42 ft) in diameter, with a radius of 8.21 ft.¹² The volume of a cylinder is calculated using the following formula:

¹¹ In support of the calculations presented in this section, it is assumed that the intake structure will consist of five velocity caps.

¹² The size of a velocity cap may change slightly because the final design has not yet been completed.

$$V_{\text{cylinder}} = \pi * r^2 * h$$

Where:

$$\begin{aligned}\pi &= 3.141593 \\ r &= \text{radius (8.21 ft)} \\ h &= \text{height (5 ft)}\end{aligned}$$

Using this formula, the volume of each velocity cap equals 1,058.7812 ft³, for a total volume of 5,293.906 ft³ (rounded to 5,294 ft³) across the five velocity caps. This calculation represents the volume of water that may contain marine life capable of entering the five intake pipes at any one point in time.

The estimated volume of water associated with the larger squares (referred to here as volumetric boxes 1, 2, and 3 for the 0.5- by 0.5-mile, 1- by 1-mile, and 1.5- by 1.5-mile squares, respectively) around the intake structure was calculated in the ArcGIS software environment using the “Polygon Volume” tool of the 3D Analyst extension. The volumes represent the area enclosed within the plane of the squares, referenced at mean sea level (0.93 ft NAVD88), and the sea bed beneath them, referenced to NOAA’s continuously updated digital elevation model bathymetry (accessed in September 2022).¹³ These estimated volumes are as follows (see **Table 3-1**): volumetric box 1 = 251,085,200 ft³, volumetric box 2 = 996,730,233 ft³, and volumetric box 3 = 2,176,520,647 ft³.

Based on this information, one can determine how the total static volume of water present in the five velocity caps (i.e., 5,294 ft³) compares to the volume of water present in volumetric boxes 1, 2, and 3 by dividing the latter into the former. These calculations yield the following ratios (see **Table 3-1**):

- Volume in the velocity caps vs. box 1: $5,294 \text{ ft}^3 \div 251,085,200 \text{ ft}^3 = 0.000021084$
- Volume in the velocity caps vs. box 2: $5,294 \text{ ft}^3 \div 996,730,233 \text{ ft}^3 = 0.000005311$
- Volume in the velocity caps vs. box 3: $5,294 \text{ ft}^3 \div 2,176,520,647 \text{ ft}^3 = 0.000002432$.

These ratios can generically be interpreted as follows: for every one egg or larva that may be present in the velocity caps, the following number of eggs and larvae may be present in the three volumetric boxes (assuming homogeneous distribution of the ichthyoplankton throughout the water column):

- Volumetric box 1: 47,429 eggs or larvae (i.e., $1/0.000021084$)

¹³ Site-specific bathymetric data are available for the area around the location of the intake structure. However, these data could not be used in the calculations because they did not extend shoreward enough to provide all the required depth readings for the 1- × 1-mile and the 1.5- × 1.5-mile volumetric boxes.

- Volumetric box 2: 188,288 eggs or larvae (i.e., 1/0.000005311)
- Volumetric box 3: 411,184 eggs or larvae (i.e., 1/0.000002432).

In other words, assuming an even distribution of eggs and larvae throughout the water column and strictly based on volumetric proportions, the intake structure would contain 1 egg or larva for every 411,184 eggs or larvae found within volumetric box 3. The conclusion is that the effects of any incidental withdrawal of eggs and larvae by the intake structure will be minor given the vastly larger numbers of ichthyoplankton in the vicinity of the project area.

Measured ichthyoplankton density data are required to put these ratios into a more site-specific context. The ichthyoplankton assessment presented in Appendix U of the Deepwater Port license application for the Bluewater SPM Project (Bluewater Texas Terminals LLC 2021b) uses location-specific ichthyoplankton tow data provided by the NOAA National Marine Fisheries Service's (NMFS) Southeast Area Monitoring and Assessment Program (SEAMAP) to estimate the average number of fish eggs and fish larvae present at Station B233 from June through November. This station, which is represented by a 30- by 30-nautical mile block in the GOM off Port Aransas, includes the proposed location for the intake structure. The summer-fall sampling period broadly corresponds with much spawning activity in this area. Fish egg and larvae catch for each sample were aggregated, and divided by the sample VOL FILT parameter to create the sample catch per cubic meter of water filtered (i.e., catch per unit effort or density). For each taxon, larval densities were estimated as arithmetic means across the 24-year time series (1986 to 2014, excepting years where no sampling occurred at Station B233). A statistical distribution was estimated from which the average, as well as the 2.5 and 97.5 percentiles, were identified as the lower confidence limit and upper confidence limit.

Based on the SEAMAP ichthyoplankton surveys conducted by NMFS between 1986 and 2014, the average density of fish eggs and fish larvae at Station B233 equals 0.1388 eggs/ft³ and 0.2152 larvae/ft³, respectively. These numbers compare favorably with values presented by Hernandez et al. (2011) who collected fish eggs and larvae in the GOM approximately 10.6 miles off the coast of Alabama in 66 ft of water between April and August 2005. These authors reported an average fish egg density of 0.0697 eggs/ft³ and an average fish larvae density of 0.203 larvae/ft³ (note: both the SEAMAP and the Hernandez et al. 2011 studies used 0.333-mm mesh size).

To quantitatively illustrate relative densities, it is assumed that the Bluewater Texas Terminals LLC (2021b) values represent the average fish egg and larvae densities that may be present throughout the water column during spawning season in the vicinity of the project area. The amount of water in the intake structure, in which ichthyoplankton have the potential to be withdrawn from the water column via the velocity caps at any point in time, equals 5,294 ft³. As outlined earlier, the amount of water in volumetric boxes 1, 2, and 3 equals 251,085,200 ft³, 996,730,233 ft³, and 2,176,520,647 ft³, respectively. Using the ichthyoplankton density data presented above (i.e., 0.1388 eggs/ft³ and 0.2152 larvae/ft³; Bluewater Texas Terminals LLC 2021b), and assuming even distribution of eggs and larvae throughout the water column, one

can estimate the number of ichthyoplankton that may be present in the velocity caps and the three volumetric boxes at a particular point in time.

Table 3-2 summarizes the outcome of the calculations. As an example, at average ichthyoplankton densities between June and November, and assuming an equal distribution throughout the water column in the vicinity of the project area, the number of eggs in volumetric box 3 would equal 302,101,066 (i.e., $0.1388 \text{ eggs/ft}^3 \times 2,176,520,647 \text{ ft}^3$), whereas the number of eggs in the five velocity caps would equal 735 eggs (i.e., $0.1388 \text{ eggs/ft}^3 \times 5,294 \text{ ft}^3$). Hence, the number of eggs in volumetric box 3 will exceed the number of eggs in the five velocity caps by 411,022 to 1 (i.e., $302,101,066 \div 735$). The same calculations apply for the other volumetric boxes, and for the larvae.

This general approach represents another way to show that withdrawal of ichthyoplankton by the intake structure will be extremely minor compared to the high number of fish eggs and larvae present in the vicinity of the project area that will never encounter this structure. Obviously, the GOM is much larger than the 1.5- by 1.5-mile grid used in this example. Eggs and larvae found within this much larger area move into the Aransas Inlet to support recruitment into the bays.

Of note, this analysis is overly conservative for ichthyoplankton that are not evenly distributed within the water column. For example, eggs of red drum and spotted seatrout are positively buoyant at salinities above >25 ppt (Holt et al. 1981a,b). These eggs are therefore expected to float near the surface of the water column in the higher saline GOM, with little or no interaction with the velocity caps located 20+ ft below the surface.

This simplified analysis also does not consider the fact that not all of the eggs and larvae present in the GOM outside of the Aransas Inlet are expected to move through this inlet and into the estuaries for recruitment (Brown et al. 2000, 2004, 2005). The ichthyoplankton that do not enter the inlet and remain in the GOM are not recruited into their respective populations because they will not survive long term or reach reproductive age. This issue is further addressed in Section 5 of this report.

Consideration of the same general information, but in a more dynamic context, provides an alternative perspective, as outlined below.

The initial volume of State Water flowing through the velocity caps on a daily basis equals 156 mgd (or 20,854,167 ft³/d). The volume of State Water passing through the CCSC near Harbor Island on a daily basis equals 47,000 mgd (or 6,283,007,000 ft³/d).¹⁴ The 47,000 mgd represents

¹⁴ See Dr. Craig Jones' testimony filed with the State Office of Administrative Hearings on January 12, 2022 (pertaining to the TPDES effluent permit for the proposed desalination facility on Harbor Island), at p. 10 ("...the average measured tidal flow from the [CCSC] transects is 47,000 million gallons per day" near Harbor Island).

60% of the total volume of water passing through the Aransas Inlet on a daily basis,¹⁵ which equals 78,333 mgd (or 10,471,633,770 ft³/d).

The volumetric ratio of the daily flow of water through the velocity caps vs. the daily flow of water passing through the Aransas Inlet is calculated as follows:

$$20,854,167 \text{ ft}^3/\text{d} \div 10,471,633,770 \text{ ft}^3/\text{d} = 0.00199149$$

This ratio can generically be interpreted as follows: on average, for every gallon of water that passes through the intake structure, 502 gallons of water (i.e., 1/0.00199149) will pass through the Aransas Inlet, which represents the recruitment corridor linking the GOM to the seagrass beds in the shallow bays. That ratio represents 0.2% of water that moves through the intake structure compared to the volume passing thru the Aransas Inlet.

3.3.2 Additional Considerations

The hydraulic zone of influence is a loosely defined term, but generally represents an area of the source water body around an intake structure that is directly affected by the water withdrawal or diversion process. Zooplankton, including ichthyoplankton, have minimal swimming abilities and therefore mostly move passively with the prevailing currents. For this marine life, the hydraulic zone of influence represents the area around a water intake with increased likelihood that zooplankton may be withdrawn with the diverted water.

The hydraulic zone of influence for older life stages of invertebrates and fish with stronger swimming capabilities is expected to be substantially smaller than for passively moving life stages. For older non-planktonic life stages, the hydraulic zone of influence represents the point at which an organism will enter the water intake, even if it actively attempts to swim away, because it can no longer overcome the force of the withdrawn water. Even under this general scenario, the hydraulic zone of influence for actively swimming fish and invertebrates will depend on the size/life stage of the marine life (i.e., smaller sizes are less capable swimmers than larger sizes), the species-specific swimming capabilities, and the general health conditions of the marine life.

The intake structure for the proposed Harbor Island desalination facility will be designed such that the velocity at the point of entrance to the velocity caps will be ≤ 0.5 ft/s, which represents a very slow speed (note 0.5 ft/sec = 0.34 miles per hour). As noted earlier, a facility that reduces its entrance velocity to this speed meets the performance for similar structures in other regulated contexts. Based on earlier studies by Sonnichsen et al. (1973), Christianson et al. (1973), and Boreman (1977), USEPA (2011) reports that 96% of studied fish can avoid an intake structure

¹⁵ See Brown et al. (2000) at p. 24,247 (approximately 60% of flow entering Aransas Inlet is toward Corpus Christi Bay via CCSC, 30% towards Aransas Bay via Lydia Ann Channel, and 10% towards Redfish Bay via Aransas Channel); see also Brown et al. (2005) at p. 38 (division of flow is 60% to CCSC, 30% to Lydia Ann Channel, and 10% to Aransas Channel).

when the entrance velocity is ≤ 0.5 ft/s. In addition, USEPA (2014) reports that the impingement mortality is reduced by 96% when the entrance velocity is ≤ 0.5 ft/s.

The 0.5 ft/s velocity contour (if detectable) represents the outer boundary of the hydraulic zone of influence (EPRI 2007) and would be confined to the edge of the velocity cap. EPRI (2007) also reports that 0.5 ft/s velocity contours generally could not be measured in the field. This suggests that healthy, free-swimming fish may either swim past the intake structure or enter it before sensing the current and turning around. EPRI (2007) concluded that the hydraulic zone of influence concept may have limited biological relevance and that swimming capabilities and health condition of the species, as well as life stage, influence the potential for I&E more than this somewhat amorphous concept.

4 SOURCE WATER BIOLOGICAL CHARACTERIZATION

The following key steps need to be considered to assess the potential for the intake structure to withdraw marine life: a) identify the species of fish, invertebrates, reptiles, and mammals known to be present in the project area; b) select species that should be the focus for further evaluation because they are abundant, have high commercial and/or recreational value, are listed by Texas or the federal government, and/or are considered particularly sensitive to I&E; and c) describe the general life histories of selected target species to identify life stages that may have a higher potential for I&E. These issues are further discussed below.

This section of the report is organized as follows:

- Section 4.1 identifies the species present in the vicinity of the project area in the GOM based on trawl and plankton surveys, occurrence of listed species in the area, benthic survey data, and published data on the presence of phytoplankton and zooplankton.
- Section 4.2 describes the occurrence of highly migratory species (HMS) and managed fish species (MFS) in the vicinity of the project area that are specifically managed by NOAA.
- Section 4.3 describes the process used to select a small subset of target species potentially susceptible to I&E. The criteria used to identify such species consist of T&E species with the potential to be present in the vicinity of the project area, “fragile species” identified in 316(b) regulations as having a low likelihood to survive any form of impingement, species that are abundant in Texas GOM waters, species reported to be frequently impinged at cooling water intake structures elsewhere in coastal Texas, and species of commercial or recreational importance. This section also pays special attention to the five listed sea turtle species.
- Section 4.4 summarizes the life histories of the target species of fish and invertebrate species in terms of reproduction, larval recruitment, and period of peak abundance.
- Section 4.5 documents the correspondence with state and federal agencies in support of this report.

4.1 SPECIES PRESENCE IN THE VICINITY OF THE PROJECT AREA

The following sources were reviewed to prepare a list of marine species that may occur in the vicinity of the project area:

- Bottom trawl survey data collected from the Gulf States Marine Fisheries Commission via NOAA¹⁶
- Location-specific ichthyoplankton survey data subsets obtained from SEAMAP for Station B233 in the GOM and provided by NMFS in November 2022
- Fisheries survey data provided by the Texas Parks and Wildlife Department (TPWD)¹⁷
- State and federally threatened, potentially threatened, and endangered species known to occur in the vicinity of the project area
- Benthic species data presented in Appendix L (Benthic Survey Report) of the Deepwater Port License Application for the Bluewater Texas Terminal Project (Bluewater Texas Terminals LLC 2021a)
- Phytoplankton and zooplankton species from Holland et al. (1973, 1974) known to occur in nearby marine and coastal areas.

This analysis yielded 606 species of plankton, invertebrates, and vertebrates (**Appendix A**). This list provides a robust enumeration of marine life identified in the GOM Offshore of San Jose Island.

4.2 SPECIALLY MANAGED FISH SPECIES

This section describes the HMS and MFS managed by NOAA, and the associated fisheries management plans and essential fish habitats (EFHs), in order to determine which of these species may occur in the vicinity of the project area.

The 1976 Magnuson-Stevens Fishery Conservation and Management Act (MSFCMA) (NOAA 2007) regulates marine fisheries management in U.S. federal waters. The MSFCMA requires federal agencies to consult with the Secretary of Commerce, through NOAA, with respect to “any action authorized, funded, or undertaken, or proposed to be authorized, funded, or undertaken, by such agency that may adversely affect any essential fish habitat identified under this Act.”¹⁸ Each fishery management plan must identify and describe EFHs required by the managed fishery. The MSFCMA defines EFH as “those waters and substrates necessary to fish for spawning, breeding, feeding or growth to maturity.”¹⁹ NOAA’s regulations further define this term by specifying that “necessary” means “the habitat required to support a sustainable fishery and the managed species contribution to a healthy ecosystem.”²⁰

¹⁶ NOAA Fisheries. 2022. DisMAP data records. Retrieved from apps-st.fisheries.noaa.gov/dismap/DisMAP.html. Accessed August 2022.

¹⁷ TPWD, Coastal Fisheries Division, Correspondence dated August 30, 2022

¹⁸ 16 U.S.C. § 1855(2)

¹⁹ 16 U.S.C. § 1853(a)(7) and § 1802(10)

²⁰ 50 C.F.R. § 600.10

The Gulf of Mexico Fishery Management Council (GMFMC) is one of eight regional councils established by the MSFCMA and managed by NOAA. The GMFMC has developed fisheries management plans (GMFMC 2016) for the following categories of species of interest: Coastal Migratory Pelagics; Red Drum; Reef Fish; Shrimp; Spiny Lobster; and Corals. The coastal waters in the GOM Offshore of San Jose Island also fall under the Atlantic HMS fisheries management plan administered by NOAA. Atlantic HMS include tunas, swordfishes, sharks, and billfishes. Management of HMS is outlined in the 2006 Consolidated Atlantic HMS Fishery Management Plan and its amendments (NMFS 2017).

Both the GMFMC and NMFS manage fisheries within the federal waters in the vicinity of the project area. TPWD is responsible for managing the marine recreational and commercial fishing in Texas state waters, located within 9 nautical miles [~10 statute-miles] of the coastline. However, because EFH is defined as those waters and substrates needed by fish to spawn, breed, feed, or grow to maturity, the management of federal fish species can extend into state waters. In the estuarine component, EFH encompasses all estuarine waters and substrates (mud, sand, shell, rock, and associated biological communities), including the sub-tidal vegetation (seagrasses and algae) and nearby inter-tidal vegetation (marshes and mangroves). In marine waters, EFH encompasses all marine waters and substrates (mud, sand, shell, rock, hard bottom, and associated biological communities) from the shoreline to the seaward limit of the exclusive economic zone.²¹

Figure 4-1 shows the EFHs in the GOM Offshore of San Jose Island published by NMFS. An apparent inconsistency exists between NMFS and GMFMC in the EFH designation for the red drum: the data layer for the red drum EFH obtained from NMFS only identifies estuarine habitat as EFH for this species, but not the nearby GOM, whereas the GMFMC fisheries management plan states that three life stages of the red drum (specifically, early juveniles, late juveniles, and adults) occur in the nearshore habitats of the GOM (GMFMC 2016; **Table 4-1**). This discrepancy has no impact on the current evaluation because the intake structure will be located in the GOM, and it is assumed that the project area represents EFH for the red drum.

EFH for spiny lobster and corals is absent in the GOM Offshore of San Jose Island and is therefore not considered further in this report.

In the GOM, virtually all marine waters and substrates (mud, sand, shell, rock) and their associated biological communities from the shoreline to the seaward limit of the exclusive economic zone are recognized as EFH. Therefore, the water and substrate in the project area fall under the purview of several federal fisheries management plans.

Managed species are included under the following fisheries management plans:

²¹ https://gulfcouncil.org/wp-content/uploads/EFH-5-Year-Review-plus-App-A-and-B_Final_12-2016.pdf

- Shrimp Fishery of the GOM, U.S. Waters
- Red Drum Fishery of the GOM
- Reef Fish of the GOM
- Coastal Migratory Pelagic Resources in the GOM and South Atlantic
- Atlantic HMS.

The above fisheries management plans, as well as GMFMC's and NMFS' online EFH mappers^{22,23} were reviewed to determine which species may occur in the vicinity of the project area. The vicinity of the project area falls within GMFMC Ecoregion 5 in nearshore habitat. Ecoregion 5 encompasses the area from Freeport, Texas, to the U.S./Mexico border. It is understood that this area covers a substantially larger region than the space in the vicinity of the project area. GMFMC defines nearshore habitat as marine waters less than 59.1 ft deep. Excluded from further consideration were any life stage of species that did not occur in less than 35 ft of water, if specific depth intervals were defined for a species' life stage.

EFH for all the above fisheries management plans, except for HMS, is classified in terms of five life stages, namely eggs, larvae, juveniles, adults, and spawning adults. EFH for HMS is classified in terms of three life stage categories, namely spawning adults, eggs, and larvae; juveniles and subadults; and adults.

Tables 4-1 and 4-2 summarize the managed species (MFS and HMS, respectively), and their specific life stages, that may occur in the vicinity of the project area. GMFMC (2016) and NMFS (2017) provide the full life history information for all federally managed species in the GOM. In summary, it was determined that 17 species of MFS and 10 species of HMS may be present in the vicinity of the project area.

Eleven of the 17 MFS included in **Table 4-1** have sensitive life stages (i.e., eggs and larvae). Seven of the 10 HMS included in **Table 4-2** give birth to neonates ("pups"). These characteristics are further evaluated in Section 5 in terms of potential for I&E.

4.3 SELECTING TARGET SPECIES POTENTIALLY SUSCEPTIBLE TO I&E

Over 600 marine and estuarine species live in the GOM Offshore of San Jose Island (**Appendix A**). It would be unwieldy and inefficient to assess the potential for I&E for all of these species. Instead, a smaller subset of target species was identified to better focus the evaluation. The general criteria for selecting these target species, using EPA 316(b) CWIS regulations as general guidance, are as follows:

²² <https://portal.gulfcouncil.org/EFHreview.html> Accessed September 7, 2022

²³ https://www.habitat.noaa.gov/apps/efhmapper/?page=page_1 Accessed September 7, 2022

- T&E species with potential to be present in the vicinity of the project area
- Fragile species known to be present in Texas GOM waters²⁴
- Species that are abundant in Texas GOM waters
- Species reported to frequently impinge at cooling water intake structures in Texas
- Species that are commercially and/or recreationally important in Texas GOM waters.

This section presents the approach used to identify the target species that may have a potential for I&E.

4.3.1 T&E Species

Species of conservation concern may be listed as T&E under the U.S. Endangered Species Act (ESA) and/or under the authority of state law. Additionally, the Marine Mammal Protection Act of 1972 protects all cetaceans (whales, porpoise, and dolphins) and pinnipeds (seals and sea lions, but excluding walruses). The species of conservation concern that are protected by these regulatory programs were evaluated to determine which may occur in the vicinity of the project area and which may have a potential for I&E.

Texas state regulations are enforced by TPWD under Sections 65.171–65.177 (Threatened and Endangered Nongame Species) of Title 31 of the Texas Administrative Code (TAC) for animal species, and under Sections 69.01–69.09 (Endangered, Threatened, and Protected Native Plants) of Title 31 of the TAC for protected plant species. Under the TAC, TPWD prohibits the take, possession, transportation, or sale of any state-protected species listed as T&E without a permit. The ESA protects species that are T&E throughout all or a significant portion of their range. The ESA also requires the federal government to designate “critical habitat” for listed species. Critical habitat consists of the geographic areas containing the physical or biological features essential to conserve the listed species and therefore may need special management or protection. Critical habitat may also include areas that are not occupied by the species at the time of listing but are considered essential to its protection.

The following steps were taken to determine which T&E species or designated critical habitat may occur in the vicinity of the project area in the GOM:

- Compile all species listed in 31 TAC §65.175–65.176 for animal species, and in 31 TAC §69.8 for plant species.
- Perform a search using the Information for Planning and Consultation (IPAC) website²⁵ to compile a list of species and critical habitats known or expected to be present in the vicinity of the project area. The area was entered as a polygon of approximately

²⁴ See Section 4.3.2 in this report for additional details about “fragile species.”

²⁵ <https://ipac.ecosphere.fws.gov/>

130 square miles centered around the Aransas Inlet, which ran 13 miles along the shore of the barrier beaches to 10 miles Offshore. This large area ensured that the search would identify all of the listed turtle and mammal species, all of which have extensive home ranges, that might be present in this portion of the GOM.

- Compile all species listed as protected by the Southeast Region Office of NOAA. This office maintains lists of protected corals, sea turtles, whales, dolphins and porpoises, fish, shark, and rays that may occur in the southeastern United States. The Southeast Region covers the area from Texas to North Carolina.
- Review each species for its potential to occur in the vicinity of the project area, which was defined as marine habitat occurring across from San Jose Island approximately 1.5 miles to the east from the Aransas Inlet jetty, at a depth of approximately 35 ft and with substrate consisting entirely of sand. This approach eliminated all birds and freshwater fish, as well as all terrestrial species of plants, reptiles, amphibians, and mammals.
- The remaining species of marine and estuarine fish, marine mammals, marine turtles, wetland plants, corals, and critical habitats were each individually assessed to determine if their published habitat characteristics and ranges included the vicinity of the project area. Additionally, the historical trawl data and species occurrence data provided by TPWD were reviewed to determine if a listed species has been observed in the vicinity of the project area.

Table 4-3 identifies the T&E species. This list contains 7 fish species, 16 mammal species, and 5 turtle species, which are further discussed below. **Figure 4-2** shows the locations of reported sightings of T&E species in the area Offshore of San Jose Island.

4.3.1.1 Listed Fish Species

Four of the listed fish species do not occur in the vicinity of the project area. Both the large-tooth sawfish and small-tooth sawfish were historically present, but are now considered extirpated from the region. The Nassau grouper is not known to occur in the region. The current range of the gulf sturgeon does not include the vicinity of the project area. By their absence, these four fish species would not experience I&E and are therefore removed from further consideration.

The oceanic whitetip shark, shortfin mako shark, and the giant ray have populations that may occur in or near the vicinity of the project area. These three species are all viviparous, giving birth to fully-formed pups. These characteristics are further evaluated in Section 5 in terms of potential for I&E.

4.3.1.2 Listed Sea Turtle Species

A generalized life history of sea turtles involves the following stages:

- The life cycle starts with egg laying on coastal nesting beaches. Hatchlings emerge from their nest, crawl towards the water, and quickly swim away from the coast to reach oceanic areas (typically depths greater than 650 ft).
- Post-hatchlings to juveniles remain for several years in the oceanic habitat typically associated with Sargassum (algae mats in open ocean) habitats.
- After growing to a larger body size, several species of sea turtles (Kemp's Ridley, green, hawksbill, and loggerhead; but not leatherback) recruit to shallower habitats throughout the continental shelf (neritic).
- Once the adults reach sexual maturity (the timing of which varies among species), they perform breeding migrations that can be across oceanic habitats to find mates, and often return to the nesting areas where they were born.

The Kemp's Ridley, green, hawksbill, and loggerhead turtles (i.e., all species except for the leatherback) experience an ontological shift, with a distinct post-natal oceanic phase, followed by recruitment as juveniles back over the continental shelf. The leatherback lives in the general pelagic habitat (both neritic and oceanic) and does not experience a distinct ontological shift.

Four of the five T&E sea turtle species that have the potential to occur in the GOM Offshore of San Jose Island (i.e., loggerhead, green, hawksbill, and Kemp's Ridley) have been observed in that area (**Figure 4-2**). **Table 4-4** provides detailed life history information on the five listed sea turtle species. This information is summarized below:

- **Loggerhead sea turtle (*Caretta caretta*)**
These turtles live in the GOM and are known visitors to the Texas coast. Juveniles and young adults spend their lives in the open ocean before migrating onshore to breed and nest. Some nesting occurs in Texas between April and September, preferably on coarse-grained, narrow, and deeply-sloping sand beaches. Hatchlings depend on floating algae/seaweed for protection and foraging, which eventually transports them into the open ocean (TPWD 2022).²⁶ Foraging areas for neritic juveniles and adults include shallow continental shelf waters. Nesting in the GOM occurs from Florida to Texas. In Texas, occurrences have been documented at the Padre Island National Seashore (PINS),²⁷ located south of the project area. Hatchlings of this species may be briefly present in the vicinity of the project area when they enter the water after emerging from their nests and while migrating to oceanic waters away from shore. In addition, neritic juveniles and adults may be present nearshore for longer periods of time.

²⁶ https://tpwd.texas.gov/huntwild/wild/wildlife_diversity/nongame/listed-species/

²⁷ National Park Service. 2022. Loggerhead Sea Turtle (*Caretta caretta*) species page. Retrieved from <https://www.nps.gov/pais/learn/nature/loggerhead.htm>. Accessed September 8, 2022.

- **Green sea turtle (*Chelonia mydas*)**

The green sea turtle occurs in the GOM. Adults and juveniles occupy inshore and nearshore areas, including bays and lagoons with reefs and seagrass. Green sea turtles are largely herbivorous, consuming seagrasses and algae. The Texas Natural Diversity Database (TXNDD) reported several occurrences within 5 miles of the project area in 2004 and 2008 (TXNDD 2019). Nesting in the GOM occurs from June through September. In 2022, green turtle nests were observed on Mustang Island (approximately 8 miles south of Port Aransas, Texas; 1 nest), North Padre Island north of PINS (8 nests) and PINS (20–25 miles south of Port Aransas; 20 nests) in Texas.²⁸ It is therefore possible that hatchlings of this species may be briefly present in the vicinity of the project area when they enter the water after emerging from their nests and quickly migrate out to open water away from shore areas. In addition, neritic juveniles and adults may be present in the vicinity of the project area for longer periods of time.

- **Kemp's Ridley sea turtle (*Lepidochelys kempii*)**

The Kemp's Ridley sea turtle is the smallest and most critically-endangered sea turtle species. In Texas, they occur in nearshore GOM waters, as well as bays and passes, where they feed mostly on crabs, and occasionally fish, sea jellies, and mollusks.²⁹ Currently, nesting occurs on GOM beaches from Bolivar Peninsula, Texas, to Vera Cruz, Mexico. Ninety-five percent of worldwide nesting occurs in Tamaulipas, Mexico. Each year, a few nests are found in other U.S. states. In the U.S., PINS represents primary nesting grounds for this species, with nesting occurring from April through August. In 2022, 8 nests were reported on San Jose Island (northwest of the project area), 14 nests on Mustang Island, 16 nests on North Padre Island (just south of Mustang Island), and 132 nests at PINS.³⁰ It is therefore possible that hatchlings from this species may be briefly present in the vicinity of the project area when they enter the water after emerging from their nests and quickly migrate to open oceanic waters away from nearshore areas. In addition, neritic juveniles, as small as 20 cm (7.8 in.) and as young as 1 to 2 years old, may be present in the vicinity of the project area and remain in the neritic habitat until they reach maturity.

- **Hawksbill sea turtle (*Eretmochelys imbricata*)**

This species is found in the GOM, including Texas. Following the oceanic juvenile life stage, juveniles then migrate to shallower, coastal areas, mainly coral reefs and rocky areas, and also in bays and estuaries near mangroves when reefs are absent, but seldom in water deeper than 65 ft. They feed on sponges, jellyfish, sea urchins, mollusks, and crustaceans. Nesting occurs from April to November high up on the beach where

²⁸ National Park Service. 2022. Green Sea Turtle (*Chelonia mydas*) species page. Retrieved from <https://www.nps.gov/pais/learn/nature/green.htm>. Accessed September 8, 2022.

²⁹ National Park Service. 2022. Kemp's Ridley Sea Turtle (*Lepidochelys kempii*) species page. Retrieved from <https://www.nps.gov/pais/learn/nature/kridley.htm>. Accessed September 8, 2022.

³⁰ <https://www.nps.gov/pais/learn/nature/current-nesting-season.htm>. Accessed September 9, 2022.

vegetation is available for cover. According to TXNDD, the last recorded observation near Port Aransas occurred in 1958 (TXNDD 2019). However, the National Park Service reports that juveniles occur in the nearshore waters of GOM and the waters near the Aransas Inlet jetty.³¹ Post-hatchlings (approximately 7.6 cm [3 in.] long) have been found alive washed ashore in Sargassum seaweed, and juveniles (approximately 30.5 cm [12 in.] long) have been found alive washed ashore and entangled in mesh sacs.³¹ Only one hawksbill nest has been documented in Texas, specifically at PINS.³¹ It appears unlikely that hatchlings from this species would be present in the vicinity of the project area. However, neritic juveniles and adults may be present in the vicinity of the project area for longer periods of time.

- **Leatherback sea turtle (*Dermochelys coriacea*)**

This species is found in the GOM. It is the most pelagic of the sea turtle species and performs the longest migrations. It is an omnivore that prefers feeding on jellyfish. The leatherback is usually found in the deeper, open ocean rather than closer to shore. This highly mobile turtle is unlikely to be present in the vicinity of the project area even though the area contains habitat that may be used by this species. TXNDD has not recorded the presence of leatherbacks in the GOM Offshore of San Jose Island (TXNDD 2019). Nesting is not common in Texas; however, a leatherback nest was reported in 2008 at PINS.³²

The possible presence of recently emerged sea turtle hatchlings, juveniles, and adults in the project area is further evaluated in Section 5 in terms of potential for I&E.

4.3.1.3 Listed Marine Mammal Species

Several of the 16 species of T&E marine mammals are not known to occur in the vicinity of the project area. Also, all of these species have large body sizes and give birth to live offspring with strong swimming abilities. Covering the openings of the velocity caps with 3-in. mesh bar screens to prevent entrance by neritic juvenile sea turtles will also preclude any possibility of entrance by marine mammals. Hence, no further evaluation of these species is needed because marine mammals are not expected to be affected by I&E.

4.3.2 Fragile Species

“Fragile species” is a term that EPA defines as follows in 40 CFR 125.92(m)³³:

³¹ National Park Service. 2022. Hawksbill Sea Turtle (*Eretmochelys imbricata*) species page. Retrieved from <https://www.nps.gov/pais/learn/nature/hawksbill.htm>, Accessed September 9, 2022.

³² <https://www.nps.gov/pais/learn/nature/leatherback.htm>

³³ <https://www.ecfr.gov/current/title-40/chapter-I/subchapter-D/part-125>

Fragile species means those species of fish and shellfish that are least likely to survive any form of impingement. For purposes of this subpart, fragile species are defined as those with an impingement survival rate of less than 30 percent, including but not limited to alewife, American shad, Atlantic herring, Atlantic long-finned squid, Atlantic menhaden, bay anchovy, blueback herring, bluefish, butterfish, gizzard shad, grey snapper, hickory shad, menhaden, rainbow smelt, round herring, and silver anchovy.

Not all the fragile species mentioned above are expected to be present in the GOM Offshore of San Jose Island. This report used a combination of published literature on intake structures (Stunz and Montagna 2015) and I&E (WCM Group Inc. 2020; GBNEP 1993; Shepherd et al. 2016) in coastal Texas to identify the subset of fragile species expected to occur in the vicinity of the project area. The following four species fit this criterion:

- Bay anchovy
- Bluefish
- Gizzard shad
- Gulf menhaden.

Review of the life history information of these four species identified the gizzard shad as primarily a freshwater/brackish species that would be unlikely to occur in the vicinity of the project area out in the GOM. This species was therefore removed from further evaluation.

The three remaining fragile species were retained as target species.

4.3.3 Abundant, Frequently Impinged, and Commercially and/or Recreationally Important Species

The following sources were used to identify a subset of species to evaluate regarding potential to interact with the intake structure:

- The NOAA and TPWD trawl surveys
- Species identified as “potentially impacted” by intake structures in coastal Texas (Stunz and Montagna 2015)
- Species considered in the permit renewal for the Nueces Bay Power Station in Corpus Christi (WCM Group Inc. 2020)
- “Species comprising 1% or more of the total impinged during each study” of coastal Texas power plant intake structures, species frequently impinged, and species considered commercially and recreationally important (GBNEP 1993)

- Species impinged at the Barney M. Davis Power Plant in Corpus Christi (Shepherd et al. 2016)
- Species of commercial and recreational importance in the GOM as identified by the NMFS (2012)
- The three “fragile” species identified in Section 4.3.2 above.

Abundant species from the trawl surveys were determined using data from NOAA (weight catch per unit effort) and TPWD (sum catch per hour) to identify the species that are more likely to be present. The resulting list from the NOAA surveys consisted of 40 invertebrate and 70 vertebrate species (**Appendix B, Table B-1**), and the list from the TPWD surveys consisted of 121 invertebrate and 163 vertebrate species (**Appendix B, Table B-2**). These numbers were further condensed by selecting the 15³⁴ most-abundant species of invertebrates and vertebrates identified in the NOAA and TPWD surveys, respectively, which yielded the following results:

- **Table 4-5** shows that the 15 most-abundant invertebrate species from the NOAA surveys consist of 2 cnidarian species, 8 decapod species (4 crab and 4 shrimp), 2 echinoderm species, and 3 squid species. The 15 most-abundant vertebrate species from the NOAA data consist of 2 elasmobranch species (1 shark and 1 ray), 4 benthopelagic species of ray-finned fish, 5 species of demersal ray-finned fish, and 4 species of pelagic ray-finned fish.
- **Table 4-6** shows that the 15 most-abundant invertebrate species from the TPWD surveys consist of 3 cephalopod species, 3 cnidarian species, 7 decapod species (2 crab and 5 shrimp), and 2 echinoderm species. The 15 most-abundant vertebrate species from the TPWD surveys are all ray-finned fish and consist of 3 benthopelagic species, 10 demersal species, and 2 pelagic species.

These lists were incorporated into the selection of species susceptible to I&E to highlight those species that are abundant in the GOM Offshore of San Jose Island.

Table 4-7 presents an initial list of 63 species based on the criteria and sources outlined above. From this initial list, species were selected that fell into the following categories:

- Representative/target species already identified (WCM Group Inc. 2020)
- Species that are locally abundant (**Tables 4-5 and 4-6**) and/or frequently impinged (Galveston Bay NEP 1993)
- Commercially- and recreationally-important species (Galveston Bay NEP 1993; NMFS 2012)
- The three “fragile” species identified in Section 4.3.2 above.

³⁴ This number is based on professional judgment and simply represents a smaller set of species available to select the final target species.

This reductive process yielded 14 fish species and 6 invertebrate species. These 20 species are shaded in **Table 4-7**.

This interim list of 20 species was used to select the final 6 target fish species³⁵ (i.e., bay anchovy, bluefish, Gulf menhaden, Atlantic croaker, red drum and spotted seatrout) and 5 target invertebrate species³⁶ (i.e., blue crab, lesser blue crab/gulf crab, brown shrimp, pink shrimp, and white shrimp). All fragile species, except for gizzard shad, which is not expected in the GOM, were retained as target species. For the remaining species, preference was given to those species falling into more than one of the aforementioned categories and consideration was given to reflect a variety of life histories. Based on the best available information and the authors' best professional judgment, these 11 target species are broadly representative of the large species assemblages that occur in the GOM around the project area.

4.4 REPRODUCTION, LARVAL RECRUITMENT, AND PERIOD OF PEAK ABUNDANCE FOR TARGET SPECIES

The 11 target species may experience I&E depending on the life history traits of each species. The attributes of the different life stages present different methods of interaction that may occur during one or more critical life stages. For example, adults may occur in the vicinity of the project area, but due to their ability to swim at velocities faster than the proposed intake speed (i.e., ≤ 0.5 ft/s), the potential for I&E would be lower or non-existent. However, other life stages (planktonic or nektonic) may not have the ability to divert away from the velocity caps and may have a higher potential of entering the intake structures.

Table 4-8 summarizes the general life histories of the 11 target species. This information shows that many of the 11 target species selected for further evaluation have one or more sensitive life stages with a potential for I&E. This issue is further discussed in Section 5.

4.5 DOCUMENTATION OF CORRESPONDENCE WITH STATE AND FEDERAL AGENCIES

The Coastal Fisheries Division of the TPWD was contacted via email to obtain species occurrence data for the vicinity of the project area (**Appendix C**). In an email dated August 30, 2022, TPWD provided lists of vertebrate and invertebrate species that were collected using otter trawls from TPWD Major Area 20, which overlaps with the vicinity of the project area. These data are summarized in **Table 4-6**. In an email dated September 14, 2022, TPWD provided a list of sea

³⁵ This number represents a manageable set of fish species with various characteristics of interest described earlier in this section.

³⁶ This number represents a manageable set of invertebrate species with various characteristics of interest described earlier in this section.

turtle occurrences and measured lengths from estuaries, designated as TPWD Major Area 5 (Aransas Bay), Major Area 6 (Corpus Christi Bay), and TPWD Major Area 20 (**Appendix C**).

Ichthyoplankton survey data collected in the GOM around the project area were obtained through direct email with the Southeast Fisheries Science Center of the NMFS. On December 13, 2022, NMFS provided ichthyoplankton trawl data for SEAMAP Station B233, the closest SEAMAP station to the project area. Species present in the ichthyoplankton data set that were absent in the bottom trawl survey data are noted in **Appendix A**, which also describes data use and analysis.

5 EVALUATION OF I&E POTENTIAL

This section evaluates how the physical conditions and salinities that prevail in the vicinity of the project area (Section 2), the general design features of the intake structure (Section 3), and the various species of marine life present in the vicinity of the project area (Section 4) may interact with the velocity caps and result in potential I&E at the proposed desalination facility.

5.1 INTRODUCTION

The main observations about the physical conditions and salinities prevalent in the project area are that it is mostly uniform in terms of bathymetry (approximately 35 ft deep, with minimal variation), has a predictable substrate composition (mostly sand), and the tidal currents are well defined (relatively faster than the intake velocity of ≤ 0.5 f/sec and typically moving parallel to the shoreline but in opposite directions depending on the seasons). The field-collected salinity and temperature profiles reflect the prevailing conditions in the GOM.

The major observations about the intake structure are that it will be located approximately 1.3 miles in the GOM, will divert 156 mgd (with the ability to expand in the future to 312 mgd) of State Water via four or five velocity caps to ensure an entrance velocity ≤ 0.5 ft/s and thereby relatively minimize withdrawal of eggs and larvae into the intake tunnel. Another important feature appropriately considered are the traveling fish screens proposed for the intake bay on Harbor Island to help remove marine life that may enter the intake structure from the GOM and be transported to Harbor Island through the intake tunnel.

The major observations about the biology in the GOM across from San Jose Island are that a) some MFS and HMS marine species, along with T&E marine species, may pass in the vicinity of the project area but are not expected to be adversely impacted by the State Water diversion process due to their large size and strong swimming abilities; b) smaller juvenile neritic sea turtles will be prevented from moving into the velocity caps by 3-in. mesh bar screens added at the entrances of these intake structures; and c) multiple species of marine and estuarine fish and invertebrates (including MFS and HMS) may reside and/or spawn in the vicinity of the area during different periods of the year.

The remainder of this section evaluates the sources of information used to determine the potential for I&E of local marine species.

5.2 SPECIFIC POTENTIAL FOR I&E

This section describes the specific potential of I&E for various species groups and life stages that may be present in the vicinity of the project area.

5.2.1 Potential I&E of MFS and HMS

Managed Fish Species

Table 4-1 summarizes the species and life stages of MFS that may be present in the GOM Offshore of San Jose Island. Of note, 4 of the 17 MFS shown in this table (namely, brown shrimp, pink shrimp, white shrimp, and red drum) are also evaluated as part of the 11 target species selected based on other considerations (see **Table 4-7**).

Of the 17 MFS, 8 species may have eggs and 11 species may have larvae in the vicinity of the project area at some time during the year. The velocity caps that define the entrance of the intake structure will minimize the number of juvenile and adult fish that may enter the intake structure because these older life stages are larger and can actively swim away upon sensing any horizontal intake currents. Eggs are passive and larvae have limited swimming capacity. Hence, these younger life stages do not have the ability to actively escape the current moving through the entrance and thus may be withdrawn by the velocity caps. Some plankton can be expected to enter the intake structure, even though the entrance velocity of ≤ 0.5 ft/s, and the depth of the velocity caps (i.e., 5 to 10 ft above the sea bed in at least 35 ft of water), will minimize this process. Of note, eggs and/or larvae that are positively buoyant (i.e., located close to the surface) or demersal (i.e., located on or close to the sea bed) are not expected to be withdrawn by the velocity caps, and therefore have a limited potential to experience I&E.

Highly Migratory Species

As shown in **Table 4-2**, of the 10 HMS, none are expected to have eggs or larvae in the vicinity of the project area. Although sailfish are an HMS that spawn eggs and form planktonic larvae, available data show that sailfish egg and larvae are not found in the vicinity of the project area. The remaining 9 species listed as HMS in **Table 4-2** are all shark species that have neonates (pups) born viviparously—fully formed swimmers that, unlike larvae, can avoid the intake structure current. Two of the shark species are also not found in the vicinity of the project area. The low entrance velocity of ≤ 0.5 ft/s at the velocity caps is expected to allow the highly-mobile shark pups, the only early life stage HMS in the vicinity of the project area, to avoid I&E.

In summary, the available information shows that 11 of the 17 MFS may have early life stages in the vicinity of the project area that have a potential to be drawn through the entrance of the velocity caps. Of the 10 HMS that may be present in the vicinity of the project area, only the sailfish spawn eggs and form planktonic larvae, but both of these life stages are not expected to be present in the vicinity of the project area, based on information presented in NMFS (2017). The remaining nine HMS all represent highly migratory shark species that give birth to fully-formed and actively-swimming pups. Two of these shark species are not found in the vicinity of the project area. The potential for shark pups to be captured by the water intakes is estimated to

be minimal because they are capable swimmers and their large body size would prevent passage through the 3-in. mesh bar screen and into the intake tunnel.

5.2.2 Potential I&E of T&E Species

Tables 4-3 and 4-4 summarize the T&E species and their life stages that have the potential to be present in the vicinity of the project area. As indicated by Table 4-3, some T&E species are not found in the project area.

Listed Fish Species

The seven listed fish species are either not present in the vicinity of the project area or may be present but give birth to fully-formed neonates with strong swimming abilities. Absent species cannot experience I&E. Species with fully-formed neonates do not have a larval life stage that would be susceptible to I&E. The approach velocity of ≤ 0.5 ft/s at the entrance of the velocity caps is expected to allow all life stages of sharks and rays to swim away. Additionally, the relatively large body size of shark pups would prevent passage through the 3-in. mesh bar screen covering the velocity caps.

The three listed fish species that have the potential to occur in the area (i.e., the giant manta ray, the shortfin mako shark, and the oceanic whitetip shark) were evaluated for their pup sizes:

- At birth, the width (disc width) of a giant manta ray pup ranges from 91 to 182 cm (35.8 to 71.7 in.) (Miller and Klimovich 2017; Rambahiniarison et al. 2018). Neonates of that size cannot enter velocity caps protected by 3-in. mesh bar screens.
- Sharks are typically measured in total length (TL), which runs from the tip of the nose to the end of tail. Measured pup lengths for shortfin mako sharks ranged from 70 to 80 cm TL (27.6 to 31.5 in. TL) (Miller et al. 2022). To estimate the height of the shortfin mako pup, the ratio of TL to height (top of dorsal fin to bottom of belly) was measured from a scaled image published in Duffy and Francis (2001), and then the ratio (19.32 cm [7.6 in.] width to 74.5 cm [29.3 in.] length) used to calculate height estimates from published data of shortfin pup length published in Miller et al. 2022. Using this approach, shortfin mako shark pups could range from 18.0 to 20.6 cm (7.1 to 8.1 in.) in height (dorsal fin to belly). Pups of that size cannot enter velocity caps protected by 3-in. mesh bar screens.
- Oceanic whitetip sharks inhabit oceanic habitat. Measured pup lengths for this species ranged from 55 to 77 cm TL (21.7 to 30.3 in. TL) (Miller et al. 2022). Published measurements of the height or widths of oceanic whitetip shark pups could not be located. Historically, the oceanic whitetip shark grew up to 350 cm TL (137.8 in.); however, measurements from recent specimens of the shark rarely exceed 200 cm TL (78.7 in.) (Lessa et al. 1999; Young et al. 2017). The oceanic whitetip is a pelagic shark species, generally remaining in the open ocean, on the outer continental shelf, or around oceanic

islands in water over 184 m deep, and occurring from the surface to at least 152 m depth (Compagno 1984; Bonfil et al. 2008; Young et al. 2017). The locations of the nursery grounds are not well known but are believed to be in oceanic areas (Young et al. 2017). Growth rates for this species are reported as 25.2 cm per year (9.9 in.) in the first free-living year (Lessa et al. 1999; Young et al. 2017). Based on published pup TLs, growth rates, and habitat preferences, it is unlikely that this species would be present in the vicinity of the project area or would be able to pass through a 3-in. mesh bar screen.

Based on these considerations, the three listed species of manta ray and shark species will not be affected by I&E.

Listed Mammal Species

The 16 listed mammal species (i.e., whales, dolphin, and manatee) are large, powerful swimmers that are either not present in the vicinity of the project area or give birth to large, fully-formed young with strong swimming abilities. The presence of 3-in. mesh bar screens at the entrance of the velocity caps will preclude the entry of listed mammals into the intake structure. Hence, these species will not be affected by I&E.

Listed Sea Turtle Species

All five listed sea turtle species are present in the vicinity of the project area as juveniles and adults, and three of the five listed sea turtle species are known to have nested recently on nearby beaches. The presence of turtle hatchlings in nearshore waters of the GOM is inferred by this recorded nesting activity.

Table 4-4 summarizes the species-specific lengths of the turtle hatchlings, which vary from 3.8 to 9.9 cm (1.5 to 3.8 in.).

A review shows that the marine turtle nesting season can start as early as April and continues through September, with hatching occurring as late as November. The hatchlings usually come out of their nests in early evening, although they have also been documented to emerge at daybreak or during daytime. Nests can contain up to 170 eggs, and 20 to 120 hatchlings can emerge all at once (Witherington 1992, as cited in Lutz and Musick 1997).

The “hatchling frenzy” period starts right after emergence. It represents a period of high activity during which the hatchlings will enter the GOM and quickly swim away from shore. They begin to swim vigorously as soon as their flippers no longer contact the sand or substrate. Diving behavior during the initial swim has been observed, where the hatchlings dive under breaking waves, position in the undertow, and guide themselves seaward (Wynneken et al. 1990; Lohmann et al. 1995; Wang et al. 1998). The hatchlings continue to swim away from shore, resurfacing from the shallow short dives under the shore breakers, and with brief paddling near

the surface for air (1 to 5 seconds), alternating with power stroking (2 to 10 seconds) below the surface (Salmon and Wyneken 1987; Witherington 1995). Green sea turtles were observed to power stroke for 10 to 40 minutes to cross a 2,000 ft wide, nearshore reef habitat (Booth 2009). The frenzied green sea turtle hatchlings reached speeds up to 1 mile per hour (1.47 ft/s) (Booth 2009).

The frenzy period is believed to increase survival as hatchlings cross predator-rich nearshore habitat. The continuous and direct swimming can last for 20 to 30 hours (Carr and Ogren 1960; Carr 1962, 1982; Wyneken and Salmon 1992; Witherington 1995). Swimming effort declines as time increases since entering the water (Wyneken 1997; Booth et al. 2004; Burgess et al. 2006). Booth (2009) showed that the green sea turtles put maximum effort into the first few minutes of swimming, and once beyond the nearshore reef habitat and into deeper water, the swimming effort eases. The residual egg yolk supplies enough energy for continuous swimming without feeding for at least 10 days. Following the frenzied phase, post-hatchlings likely become passive migrants in oceanic currents and use the Sargassum community as developmental habitat (Shaver 1991; NMFS et al. 2011).

Listed sea turtle hatchlings have only a minimal potential for interaction with the intake structure. Hatchlings swim directly and continuously towards the pelagic habitat past the continental shelf. They do not linger close to shore. Furthermore, observations of the initial swimming phase show that following their diving behavior from breaking shore waves, sea turtle hatchlings swim near the surface as they head seaward. Therefore, hatchlings will not occur 20 to 25 ft deep approximately 1.3 miles Offshore.

The juvenile to adult life stages may occur in the vicinity of the project area for longer periods of time. Some juvenile and adult turtles may therefore interact with the entrances of the velocity caps. Recruitment to neritic habitat occurs at the juvenile life stage and is associated with the following straight carapace length (SCL): loggerhead = 41.6 to 79.7 cm (16.4 to 31.4 in.); Kemp's Ridley = 20 to 60 cm (7.9 to 23.6 in.); green turtle = 26.6 to 52 cm (10.5 to 20.5 in.); and hawksbill = 20 to 69 cm (7.9 to 27.2 in.) (**Table 4-4**). Based on the data presented in **Table 4-4**, the smallest neritic juveniles would measure 7.9 in. (Kemp's Ridley and hawksbill). The foraging grounds for these species include the entire water column and benthic habitats. All juvenile and adult sea turtles are highly mobile and strong swimmers.

Sea turtle uptake is documented at the Port St. Lucie Nuclear Power Plant, located on Hutchinson Island on the east coast of Florida. The information presented below was obtained from NMFS (2016). The plant has operated since 1976, and maintains detailed records of captured sea turtles. Cooling water is obtained via three submerged intake structures: two measuring 12 ft in diameter and one measuring 16 ft in diameter. The intake structures are found in shallow water approximately 1,200 ft from shore, with the tops of the intake structures located about 7 ft below the surface at mean low water. Each intake structure is equipped with a velocity cap that restricts flow to less than 1 ft/s without any bar screens. The intake pipes are

buried under the beach. They convey cooling water into an open intake canal approximately 1 mile long. The facility has installed barrier nets (5-, 8-, and 9-in. mesh) at the end of the canal to reduce impingement. This water intake arrangement (e.g., relatively close to shore, shallow), and the surrounding environmental setting, is quite different from the proposed water intake in the GOM for the Harbor Island desalination facility. However, the turtle uptake at the Port St. Lucie Nuclear Power Plant is included in the discussion as a point of reference.

Sea turtles at the Port St. Lucie Nuclear Power Plant enter the intake structure through the intake pipes and become entrapped in the open intake canal. Travel time through the pipes is approximately 5 minutes. This power plant entrapped 16,619 sea turtles between 2001 and 2016. The facility uses observers to capture and release the turtles. All five listed sea turtle species have been found in the intake canal, with loggerheads making up more than half of the total, green sea turtles making up slightly less than half of the total, and Kemp's Ridleys, hawksbills, and leatherbacks combined making up less than 1% of the total. From earlier records (1976 to 1985), the smallest turtle recorded was a 7.8-in. green sea turtle (NRC 1985). Overall, sub-adults were the most abundant age class found in the canal (NRC 1985). Of the 16,619 sea turtles captured, 297 (1.8%) resulted in mortality. The facility did not report a single instance of entrapment of sea turtle hatchlings.

Based on this case study, it is reasonable to deduct that neritic sea turtles as small as 7.9-in. SCL and larger may have a potential to enter unprotected velocity caps at the project area in the GOM, and move into the intake tunnel. Because of the turtles' protected status, and despite the low entrance velocity, the velocity caps will be enclosed by 3-in. mesh bar screens to prevent the entrance of sea turtle juveniles and adults into the intake structure.

An additional way to evaluate the potential for juvenile sea turtles to interact with the velocity caps in the project area is to derive an area use factor (AUF). EPA (USEPA 1997) states that the AUF represents the ratio of an area under investigation to the area used by the animal in terms of its home range, breeding range, or feeding/foraging range. In addition, the smallest area used by each animal should be retained to calculate AUFs in order to remain conservative

In the context of the current evaluation, the five velocity caps represent the area under investigation because this defined space represents the area that has the potential to allow turtles to enter the intake structure.³⁷

Calculating a species-specific AUF requires two separate pieces of information: a) the combined surface area of the five velocity caps (in square miles), and b) conservative estimates of the home ranges of the neritic juvenile turtles (also in square miles). A species-specific AUF is then

³⁷ The calculations presented below are entirely for illustrative purposes only because 3-in. mesh size bar screens will be placed in front of the entrances of the velocity caps to prevent any juvenile or adult turtles from entering the intake structure.

calculated by dividing the combined surface area of the five velocity caps by a conservative estimate of the species-specific home range.

The velocity caps are circular structures with a diameter of 16 ft, 5 in. (see **Figure 3-1**), and therefore a radius of 8 ft, 2.5 in. (98.5 in.). The area of a circle is calculated as $\pi * r^2$, or $3.14 * (98.5 \text{ in.})^2$, which equals 30,465.065 in.², or 211.563 ft² (1 ft² = 144 in.²). The total surface area of the five velocity caps equals 1,057.82 ft², which represents 0.000038 mi² (1 mi² = 27,878,400 ft²).

Valverde and Holzwart (2017) provide the following home ranges for juvenile neritic sea turtles in the GOM: Kemp's Ridley (1.9 to 11.6 mi²); loggerhead (35 to 1,652 mi²); hawksbill (0.008 mi² (average nighttime home range) to 0.048 mi² (average daytime home range): and green (>7.5 mi²) (note: the authors do not provide home ranges for the leatherbacks).

These two pieces of information are then used to calculate conservative species-specific AUFs, as follows:

- Kemp's Ridley $AUF_{\text{juvenile}} = 0.000038 \text{ mi}^2 / 1.9 \text{ mi}^2 = 0.0000200$
- Loggerhead $AUF_{\text{juvenile}} = 0.000038 \text{ mi}^2 / 35 \text{ mi}^2 = 0.000001086$
- Hawksbill $AUF_{\text{juvenile}} = 0.000038 \text{ mi}^2 / 0.008 \text{ mi}^2 = 0.0047500$
- Green $AUF_{\text{juvenile}} = 0.000038 \text{ mi}^2 / 7.5 \text{ mi}^2 = 0.0000051$.

These AUFs show that the surface area of the velocity caps represents a tiny fraction of the surface area of the species-specific home ranges. At one extreme, the home range of the hawksbill turtle is 211 times larger than the surface area of the velocity caps (i.e., 1/0.00475). At the other extreme, the home range of the loggerhead turtle is 920,810 times larger than the surface area of the velocity cap (i.e., 1/0.000001086). These AUFs should be considered conservative because they are obtained using the lowest-reported home range for each species. Even so, these values are minute and emphasize the low likelihood that juvenile neritic sea turtles would interact with the velocity caps during their foraging activities in the GOM.

In conclusion, while several T&E marine species are known to be present or have the potential to be present in the vicinity of the project area, most are deemed unlikely to experience I&E due to larger body sizes, viviparity, swimming abilities, and the slow intake velocities of ≤ 0.5 ft/s at the entrances of the velocity caps. The five sea turtle species require in-depth consideration. The "hatching frenzy" phenomenon, rate of water withdrawal at the velocity cap entrances (≤ 0.5 ft/s), velocity caps' depth below surface (20+ ft), and the velocity caps' distance from shore (beyond surf) assure that turtle hatchlings emerging from nests on beaches in the surrounding region have minimal potential for I&E. However, sea turtle juveniles and adults that use neritic habitat do have a potential for interacting with the intake structure. The small AUFs of juvenile sea turtles greatly limit any chance of encountering these structures. Furthermore, placing bar

screens across the entrances of the velocity caps to exclude juveniles and adults will eliminate the potential for interaction.

5.2.3 Potential I&E of the 11 Target Species

Table 4-7 identified for further evaluation 11 target species of fish and invertebrates of special interest based on their a) local abundance, b) life history characteristics, c) recognition as “fragile” species, d) reported impingement potential at other water intake facilities in the region, and e) recreational and/or commercial value. For each species, the general life history information was obtained for eggs, larvae, juveniles, and adults. The potential for each of these life stages to be withdrawn from the GOM and experience I&E due to the operation of the intake structure was then determined.

Table 5-1 summarizes the outcome of this process. For purpose of this evaluation, the potential for I&E is divided into the following four categories: minimal, low, medium, and high. These groupings are qualitative and assigned based on review of the available information and best professional judgement. The term “minimal” refers to the fact that the potential for passage through the intake structure, followed by I&E, is considered minor to none.

The table is also color coded to help visualize the potential for I&E, as follows: minimal is green, low is yellow, medium is orange, and high is blue.

When reviewing this body of information, it is important to keep in mind that the analysis is not a quantitative prediction of harm, but a qualitative evaluation of the potential for various life stages to be withdrawn by the intake structure in the GOM. Several factors not incorporated in the assessment need to be considered when reviewing this information:

- The evaluation does not predict mortality.
- The 3-in. mesh bar screens will prevent entry into the intake structure by larger life stages of some fish species.
- The traveling screens at the proposed desalination facility will collect and return to Aransas Channel a portion of the marine life withdrawn from the GOM.
- As presented in Section 3.3.2 of this report, any intake of marine life should not be viewed in absolute terms but must be considered within a broader ecological context. Specifically, for every egg or larva potentially withdrawn by the intake structure, vastly larger numbers of eggs and larvae in the surrounding area will not encounter this structure. So, for example, even though the potential for I&E of bay anchovy larvae is estimated to be “high” because they are found throughout the water column, it is only so for the 1 in almost 50,000 larvae within a quarter mile in any direction that potentially come into contact with the intake structure. Hence, when viewed within the context of all of the bay

anchovy larvae present in the vicinity of the project area, the potential for I&E should best be considered minor.

The results of the evaluation are as follows:

- **Atlantic Croaker (*Micropogonias undulatas*)**
The potential I&E of eggs is estimated as low because they are pelagic and positively buoyant. The potential I&E of larvae is estimated as low because they only spend a short amount of time as plankton before becoming primarily demersal at depths commonly greater than that of the intake structure. The potential I&E of juveniles is estimated as minimal because they seek out shallow habitats in estuaries. The potential I&E of adults is estimated as low because this life stage may be present in nearshore areas of the GOM but adults are expected to swim at speeds substantially higher than the entrance velocity of ≤ 0.5 ft/s.
- **Bay Anchovy (*Anchoa mitchilli*)**
The potential I&E of eggs is estimated as medium because they are buoyant until near hatching before they gradually sink into the water column. The potential I&E of larvae is estimated as high because they are found throughout the water column. The potential I&E of juveniles and adults is estimated as low because both are expected to swim at speeds substantially higher than the entrance velocity of ≤ 0.5 ft/s.
- **Bluefish (*Pomatomus saltatrix*)**
The potential I&E of eggs is estimated as low because spawning occurs Offshore over the continental shelf. The potential I&E of larvae is estimated as high because larvae are pelagic and planktonic, and are dispersed throughout the water column when they move inshore. The potential I&E of juveniles and adults is estimated as low because both are expected to swim at speeds substantially higher than the entrance velocity of ≤ 0.5 ft/s.
- **Gulf Menhaden (*Brevoortia patronus*)**
The potential I&E of eggs is estimated as high because they are planktonic and pelagic. The potential I&E of larvae is estimated as medium because they are planktonic (with diurnal vertical movements) but are more commonly found in Offshore environments before moving close to shore to enter the estuaries. The potential I&E of juveniles is estimated as minimal because they are predominantly found in estuarine environments and therefore are not in the vicinity of the intake structure. The potential I&E of adults is estimated as low because they are expected to swim at speeds substantially higher than the entrance velocity of ≤ 0.5 ft/s.
- **Red Drum (*Sciaenops ocellatus*)**
The potential I&E of eggs is estimated as low because they are pelagic and positively buoyant, which will tend to keep them higher up in the water column than the depth of the intake structure. The potential I&E of larvae is estimated as high because they are

planktonic and dispersed throughout the water column. The potential I&E of juveniles is estimated as minimal because they seek out shallow estuarine habitats and are therefore not expected to be present in the vicinity of the intake structure. The potential I&E of adults is estimated as low because they are expected to swim at speeds substantially higher than the entrance velocity of ≤ 0.5 ft/s.

- **Spotted Seatrout (*Cynoscion nebulosus*)**

The potential I&E of eggs is estimated as low because spawning occurs mainly in coastal bays, estuaries, and lagoons, but also close to shore in the GOM. Eggs are positively buoyant at salinities >25 ppt and are therefore expected to remain near the surface. The potential I&E of larvae is estimated as medium because they are planktonic for a short duration before settling to the sea bed. The potential I&E of juveniles is estimated as minimal because juveniles seek out shallow habitat ≤ 7.2 ft and are therefore not anticipated to be in the vicinity of the intake structure. The potential I&E of adults is estimated as low because they are demersal and are expected to swim at speeds substantially higher than the entrance velocity of ≤ 0.5 ft/s at the water intakes.

- **Blue Crab (*Callinectes sapidus*)**

The potential I&E of eggs is estimated as minimal because the gravid females are external brooders, and the eggs attach to females' pleopods and are held against their abdomens until hatching. The potential I&E of larvae is estimated as high because the larval stages are planktonic forms that disperse throughout the water column. The potential I&E of juveniles is estimated as minimal because they are demersal and seek out estuarine habitats and are unlikely to occur in the vicinity of the intake structure. The potential I&E of adults is estimated as low because they are demersal and unlikely to spend much time in the upper water column.

- **Gulf Crab (*Callinectes similis*)**

The potential I&E of eggs is estimated as minimal because the gravid females are external brooders, and the eggs are attached to the females' pleopods and are held against their abdomens until hatching. The potential I&E of larvae is estimated as high because all larval stages are planktonic forms that disperse throughout the water column. The potential I&E of juveniles is estimated as minimal because they are demersal, seek out estuarine habitats, and are therefore unlikely to occur in the vicinity of the intake structure, except as older juveniles. The potential I&E of adults is estimated as low because they are benthopelagic and unlikely to spend much time in the upper water column.

- **Brown Shrimp (*Penaeus aztecus*)**

The potential I&E of eggs is estimated as minimal because they are demersal and found at depths greater than the proposed location of the intake structure. The potential I&E of larvae is estimated as high because they are planktonic and follow diurnal migrations throughout the water column. The potential I&E of juveniles is estimated as low because they reside in estuarine habitats with only some older juveniles migrating into the

nearshore GOM. The potential I&E of adults is estimated as low because they are demersal, are capable of swimming at speeds higher than the entrance velocity, and prefer areas deeper than 35 ft.

- **Pink Shrimp (*Penaeus duorarum*)**

The potential I&E of eggs is estimated as low because they are demersal and are released at depths equivalent to or greater than the proposed location of the intake structure. The potential I&E of larvae is estimated as high because they are planktonic and found dispersed throughout the water column. The potential I&E of juveniles is estimated as low because juveniles are commonly found in estuaries over seagrass at depths <9.8 ft but subadults occur at depths ranging from 3.3 to 213 ft. The potential I&E of adults is estimated as low because they are demersal and are capable of swim speeds above the entrance velocity of ≤ 0.5 ft/s.

- **White Shrimp (*Penaeus setiferus*)**

The potential I&E of eggs is estimated as low because they are demersal and found at depths equal to or greater than the proposed location of the intake structure. The potential I&E of larvae is estimated as high because they are planktonic and dispersed throughout the water column. The potential I&E of juveniles and subadults is estimated as low because they are demersal and found over soft-bottom habitats in estuaries. Older juveniles migrate out into the GOM to mature. The potential I&E of adults is estimated as low because they are demersal and are capable of swim speeds above the entrance velocity of ≤ 0.5 ft/s.

The available information suggests that eggs and larvae are the life stages with the highest potential for I&E. This finding is not surprising considering that eggs are unable to swim independently, and larvae only have limited swimming capabilities, particularly in the planktonic stage. Even though the entrance velocity of the velocity caps will be engineered to withdraw water at ≤ 0.5 ft/s, some eggs and larvae present in the water column that passively enter the intake structure can be expected to be drawn in.

It is important to note that the potential for I&E is species- and life-stage specific. For example, blue crab eggs are not expected to be withdrawn by the velocity caps because females carry their eggs until hatching. As a result, blue crab eggs have a minimal potential for withdrawal. Red drum post-larvae are carried by tidal currents out of the GOM, through the Aransas Inlet, and into the extensive estuarine seagrass beds beyond. Therefore, juvenile red drum are not expected to be present in the GOM approximately 1.3 miles Offshore and have a minimal potential for I&E. Other species, such as the bay anchovy and bluefish, have eggs and larvae that are present throughout the water column in the GOM, and therefore have a higher potential to be withdrawn by the velocity caps. But, as mentioned earlier, for every egg or larva that may be withdrawn by the intake structure, large numbers of eggs and larvae in the surrounding area will not encounter this structure. Hence, even though the potential for I&E by life stages of certain species is estimated to be “high” because they are found throughout the

water column, it is only so for a tiny fraction of the total number of ichthyoplankton present in the larger area around the intake structure. So, when viewed within the context of all of the eggs and larvae present in the vicinity of the project area, the potential for I&E should best be considered to be minor when viewed on a larger scale.

5.2.4 I&E Studies in Texas

The proposed Harbor Island desalination facility and its associated intake structure are under design but have not yet been constructed. Hence, I&E data specific to this facility are not available for evaluation. By default, any assessment of the potential effect to biota from the proposed desalination facility and its intake structure is qualitative and based on extrapolated data and assumptions. Published monitoring information from several power plants operating in Texas was reviewed to support the current assessment and develop a realistic understanding of the potential for causing measurable population-level effects.

Table 5-2 summarizes I&E data collected from power stations in Texas that withdraw large volumes of cooling water from nearby water bodies. The facilities with quantitative information retained for this evaluation are the Barney M. Davis Power Plant in Corpus Christi, Texas (near Corpus Christi Bay), the P.H. Robinson Generating Station in Bacliff, Texas (Galveston Bay), the Sam Bertron Station in Strand, Texas (Houston Ship Channel), and the Cedar Bayou Generating Station in Baytown, Texas (Cedar Bayou). This section of the report focuses specifically on the data provided for these power facilities. For the sake of completeness, **Table 5-2** also provides monitoring data for several other power generating facilities in Texas. However, information from these other power generating facilities is not discussed below because it lacks actual counts of the number of impinged marine life during the monitoring period.

Several key factors must be considered when evaluating and interpreting this kind of facility-specific information:

- The power stations do not withdraw their cooling waters from the GOM 1.3 miles away from shore but instead from nearby shallow estuaries or other water bodies that have habitats, physical characteristics, salinities, and species assemblages that are expected to be quite different than those found in the GOM.
- It is unlikely that the power stations encounter the same mix of species and life stages as the intake structure in the GOM. For example, older demersal life stages of the blue crab will be more prevalent in the estuaries because of their habitat requirements, whereas planktonic life stages of the blue crab will be more prevalent in the GOM where this species spawns. Older larvae and juveniles of red drum are found in estuaries, whereas adults are also found in the GOM.
- The seasonal timing for the presence of different life stages will vary between the GOM and the other water bodies. For example, in the fall, red drum eggs are expected to be

present in the nearshore waters of the GOM where the adults spawn but not within estuaries where widespread spawning by this species is not expected to occur.

- The number of the smallest marine life that might have been entrained through the traveling screens has not been counted, and therefore is unknown.
- All else being equal, the potential for I&E also depends on a number of facility-specific factors, such as water intake capacity (mgd versus billions of gallons per day [bgd]), average intake velocities, depth of the intakes, any additional avoidance technologies, the type of fish screen technology implemented at the facility, and other engineering considerations. These variables inevitably cause existing power plants to differ substantially in their I&E performance. With full consideration of known variables and improved technologies, I&E performance is expected to be significantly improved with the more modern facilities proposed for the Harbor Island intake structure, particularly since most of the previous monitoring studies occurred before implementation of the 316(b) CWIS rules.

Notwithstanding these important caveats and unknowns, the available impingement information from the Texas power stations is summarized below:

- The *Barney M. Davis Power Plant in Corpus Christi, Texas*, performed a monitoring study over a period of 11 months, between March 14, 2006, and February 21, 2007 (estimated total of 345 days). During that time frame, the facility impinged 42,286 fish and 28,418 invertebrates, for a total of 70,704 organisms, or around 205 organisms per day. This total is equivalent to 0.38 organisms per day per million gallons of intake water based on the water intake capacity at this facility of 540 mgd.³⁸ Eleven species made up 92% of the impinged marine life during the study period. Five of those 11 species (specifically, Atlantic croaker, bay anchovy, Gulf menhaden, blue crab, and brown shrimp) also represent the target species outlined in Section 4 of this report.
- The *P.H. Robinson Generating Station in Bacliff, Texas*, performed a monitoring study over a 13-month period, from February 1969 to March 1970 (estimated total of up to 395 days). During that time frame, the facility impinged 68,518 organisms representing 83 species, or around 173 organisms per day. This total is equivalent to 0.0012 organisms per million gallons of intake water based on the water intake capacity at this facility of 138.6 bgd. The reported injury rates of the impinged marine life varied by species (10 species were assessed), and ranged from a high of 34.2% for bay anchovies to a low of 2.6% for Atlantic croakers and spotted seatrout.
- The *Sam Bertron Generating Station in Strand, Texas*, performed a monitoring study over a 12-month period, from January 12, 1978, to January 2, 1979 (estimated total of 356 days).

³⁸ The flow rate at this facility was variable. The highest flow occurred at ~492 mgd (20.52 million gallons per hour) for 7.5% of the time during the study. The flows fell below ~233 mgd (9.72 million gallons/hour) for 70% of the time during the study.

During that time frame, the facility impinged 479,448 fish and 132,450 invertebrates, for a total of 611,898 organisms, or around 1,719 organisms per day. This total is equivalent to 0.007 organisms per million gallons of intake water based on the water intake capacity at this facility of 241.1 bgd. Brown shrimp, white shrimp, and blue crab accounted for 96.2% of the invertebrate impingement. These three species are target species outlined in Section 4 of this report. Also, close to 90% of all impinged fish species consisted of Gulf menhaden, threadfin shad, bay anchovy, sand seatrout, spotted seatrout, Atlantic croaker, red drum, and southern flounder. Five of those eight species are target species outlined in Section 4 of this report.

- The *Cedar Bayou Generating Station in Baytown, Texas* (Cedar Bayou) performed a monitoring study over an 11-month period (estimated total of 334 days). During that time frame, the facility impinged 11,556 organisms, or around 35 organisms per day. It is not possible to calculate the number of organisms impinged per million gallons of intake water because the reference does not report the water intake capacity of this facility.

Galveston Bay NEP (1993) analyzed the I&E data for five power generating stations around Galveston Bay (note: the monitoring data collected at several of these stations are summarized above). The overall conclusions of those various monitoring studies were as follows:

- Small or weak-swimming larvae, post-larvae, and young fish were susceptible to I&E when intake velocities averaged >1.1 ft/s.
- Species most frequently subjected to I&E consisted of white shrimp, blue crab, Gulf menhaden, bay anchovy, sand seatrout, spot, and Atlantic croaker.
- Species less frequently subjected to I&E consisted of brown shrimp, sea catfish, and striped mullet.
- Larval fish found to be susceptible to entrainment included the naked goby, juvenile Gulf menhaden, bay anchovy, larval comb-tooth blennies, and Atlantic croaker.
- Generally, members of commercially or recreationally important fish species were not impinged in large numbers with respect to the most-abundant species.
- The overall probabilities of survival for impinged fish were much lower than for crustaceans.
- More crustaceans were impinged by number and weight compared to finfish, other than menhaden.

The available Texas I&E studies show that the number of marine life that may be retained on traveling fish screens at the proposed Harbor Island desalination facility is expected to be relatively minor when considered within a larger ecosystem context. **Table 5-3** provides fecundity information for 5 of the 11 target species. A recurring theme is the extraordinary fecundity of these species, with each female laying from tens of thousands to many millions of

eggs each year. This reproductive strategy releases untold number of eggs in the GOM based on the evolutionary premise that the vast majority of early life stages will perish before they reach adulthood. This general pattern is also described in Section 3.3.2 of this report.

5.3 POTENTIAL FOR POPULATION-LEVEL EFFECTS

The potential I&E impacts to area marine life caused by the intake structure supplying State Water to the proposed Harbor Island desalination facility will be minor based on the following considerations: a) a review of the physical variables and salinities in the GOM in the vicinity of the intake structure, b) the general engineering details and components that combine to deliver a state-of-the-art State Water diversion system, and c) review of representative and relevant marine species at all life stages for the intake structure location. This conclusion is primarily due to the relatively low numbers of marine life expected to be drawn through the intake structure as compared to the high numbers of marine life present in the vicinity of the project area.

Entrainment impacts of planktonic larvae are typically assessed indirectly based on modeling. From a population biology perspective, the spatial scale of the proposed State Water diversion is very minor when considering the substantially larger amount of source water containing eggs and planktonic larvae in the vicinity of the project area. Depending on site-specific factors, such as withdrawal volume, velocity, and density of planktonic larvae, the range of potential larval entrainment losses derived from modeling results have been estimated as 0.02% to 0.33% of the source water populations for the Huntington Beach Desalination Facility in California, which had a proposed intake volume of 152 mgd (Tenera Environmental 2010a). Modeled species-specific losses of 0.01% to 0.063% were calculated by Tenera Environmental (2010b) for another facility in California with a proposed intake flow rate of 7 mgd. These losses were not considered significant because of the high fluctuations in population levels from changing environmental conditions, other stressors, and natural sources of mortality, which reach 99.9% (Tenera Environmental 2010b).

Several studies have modeled the movement of passive particles, representing red drum eggs and larvae, from the GOM into the Aransas Inlet by accounting for various environmental forces (e.g., tides and wind) and biological factors (e.g., egg or larval development and settlement) (Brown et al. 2000, 2004, 2005). These modeling studies found that between 39% and 55% of all the passive particles present in the GOM immediately outside of the Aransas Inlet at the start of the simulations were not anticipated to enter the inlet and were therefore effectively “lost” to the ecosystem. This type of large-scale loss is normal and expected. It emphasizes that the relatively small numbers of eggs and larvae that may be withdrawn by the intake structure at a more remote location in the GOM, when compared to the total number of eggs and larvae present in the vicinity of the project area (Section 3.3.1) and for many miles beyond in all directions, is not expected to affect local populations.

5.4 SUMMARY AND CONCLUSIONS

The analysis presented in this report suggests that the proposed water intake structure for the Harbor Island desalination plant has the potential to interact with planktonic life stages and weakly swimming older life stages of fish and invertebrates present in the GOM, as well as sea turtle juveniles. The numbers, kinds, and sizes of fish and invertebrates that interact with the intake structure will depend on life history considerations (e.g., spawning close to shore vs. pelagic areas; floating and demersal eggs vs. neutrally buoyant eggs; organism size; swimming abilities), seasonal considerations (e.g., fall spawners vs. year-round spawners), and intake structure considerations (e.g., average intake velocities, structure and function of velocity caps), among others. These topics have been discussed above.

Although some intake of marine life is inevitable with the intake structure for the project area in the GOM, the following considerations indicate that the potential effects to marine species and their local populations are expected to be minor:

- The design intake flow velocity at the entrance to the intake structure will fall below the EPA-established limit of ≤ 0.5 ft/s for power plants in other contexts, and is expected to drastically reduce the amount of marine life entering the velocity caps (and therefore greatly reduce I&E).
- The prevailing tidal velocities in the GOM are generally higher than the entrance velocity of 0.5 ft/s at the intake structure (see **Figure 2-10**). This combination suggests that, on average, eggs and larvae are more likely to pass through the velocity caps instead of being withdrawn by them.
- The location of the intake structure is approximately 1.3 miles Offshore, away from shallow habitat that comprises areas that may be used more widely by smaller species or for spawning.
- The intake structure will be submerged at depth with approximately 20 to 25 ft of water overlying the velocity caps. This deeper placement will greatly limit or eliminate the withdrawal of positively buoyant eggs found at or near the surface of the GOM.
- The intake structure entrances will be at least 5 ft above the sea bed. This design feature will greatly limit or eliminate the withdrawal of demersal eggs and other benthic marine life species.
- The number of those marine species potentially affected by I&E is further reduced by application of current technology, including bar screens that prevent certain marine life from entering the intake structure, and traveling screens at the proposed desalination facility on Harbor Island that return marine life to a natural habitat.

Based on volumetric considerations, and assuming even distribution throughout the water column, any withdrawal of eggs and larvae by the intake structure will represent a very small

fraction of the total number of eggs and larvae expected to be present in the vicinity of the project area. If ELS are not evenly distributed in the water column (e.g., the eggs of red drum and spotted seatrout have positive buoyancy in the salty waters of the GOM), then the potential for withdrawal of such marine life is reduced even further.

The survival potential of marine life impinged on the traveling screens likely depends on the species (e.g., early life stages of fish have lower survival rates than invertebrates, “fragile” fish species are more affected than other fish species) and the proposed efficiency and efficacy of the steps used to remove the impinged marine life from the traveling screens for return to the nearby aquatic habitat.

An important consideration is the high fecundity of the 11 target species evaluated in this report. Their reproductive strategy presupposes that the vast majority of eggs and larvae will not survive to adulthood. Such a strong, built-in resiliency helps mitigate any impacts that might be associated with any potential withdrawal of these early life stages by the intake structure.

Finally, T&E species (sea turtles) and HMS are not expected to be affected by the intake structure due to a combination of the following factors: lack of presence in the project area, strong swimming abilities, large body sizes, birthing of fully formed neonates (e.g., shark pups and whale calves, instead of eggs and larvae), the design of the intake velocity caps, the presence of 3-in. bar screens, the depth of intake, and the distance of the intake from shore.

Turtle hatchlings have the potential to be present in the project area in the GOM for short periods of time based on the recorded presence of sea turtle nests on several regional beaches. However, nesting activity does not appear to be widespread (i.e., dozens of nests, not thousands), and the potential for withdrawal of sea turtle hatchlings by the intake structure is anticipated to be rare based on behavioral considerations (e.g., “frenzied” swimming close to the GOM surface towards the open ocean to minimize mortality from nearshore predators). Juvenile and adult sea turtles are present in the vicinity of the project area and have the potential to interact with the intake structure, as has been shown to occur at the Port St. Lucie Nuclear Power Plant in Florida. However, the potential for neritic juvenile sea turtles to interact with the velocity caps is demonstrably minimal using an AUF approach. The design of the intake structure will include adding 3-in. mesh size bar screens at the entrances of the velocity caps to eliminate any potential for accidental “take” of juvenile turtles. This mitigation measure will also prevent adult sea turtles or larger fish from entering the velocity caps.

The following components will be implemented based on all these considerations: a) place the water intake structure approximately 1.3 miles Offshore at 5 to 10 ft above the sea bed in approximately 35 ft of water to limit interaction with marine life, b) set the entrance velocity at the velocity caps to ≤ 0.5 ft/s to reduce the potential withdrawal of eggs and larvae, c) enclose the velocity caps with 3-in. mesh size bar screens to prevent incidental entrance by juvenile and

adult sea turtles, and d) use traveling screens at the proposed desalination facility to support survival.

6 REFERENCES

Blanchet, H. et al. 2001. The spotted seatrout fishery of the Gulf of Mexico, United States: A regional management plan. Van der Kooy (ed.). Gulf States Marine Fisheries Commission, Publication No. 87. March.

Bluewater Texas Terminals LLC. 2021a. Appendix L: Benthic Survey Report in Deepwater Port License Application for the Bluewater SPM Project, Volume II: Environmental Evaluation. Available at: https://downloads.regulations.gov/MARAD-2019-0094-0004/attachment_32.pdf

Bluewater Texas Terminals LLC. 2021b. Appendix U: Ichthyoplankton Assessment, Volume II: Environmental Evaluation. Available at: https://downloads.regulations.gov/MARAD-2019-0094-0004/attachment_41.pdf

Bonfil, R., S. Clarke, and H. Nakano. 2008. The biology and ecology of the oceanic whitetip shark, *Carcharhinus longimanus*. pp. 128-139. In *Sharks of the Open Ocean: Biology, Fisheries and Conservation*. M.D. Camhi, E.K. Pikitch, and E.A. Babcock (eds). Blackwell Publishing Ltd, Oxford, UK.

Booth, D.T. 2009. Swimming for your life: Locomotor effort and oxygen consumption during the green turtle (*Chelonia mydas*) hatchling frenzy. *J. Exp. Biol.* 212: 50–55. 10.1242/jeb.019778

Booth, D.T., E. Burgess, J. McCosker, and J.M. Lanyon. 2004. The influence of incubation temperature on posthatchling fitness characteristics of turtles. *International Congress Series* 1275:226–233.

Boreman, J. 1977. Impacts of power plant intake velocities on fish. Power Plant Team. U.S. Fish and Wildlife Service.

Brown, C.A., G.A. Jackson, and D.A. Brooks. 2000. Particle transport through a narrow tidal inlet due to tidal forcing and implications for larval transport. *J. Geophys. Res.* 105(C10): 24,141-24,156.

Brown, C.A., S.A. Holt, G.A. Jackson, D.A. Brooks, and G.J. Holt. 2004. Simulating larval supply to estuarine nursery areas: How important are physical processes to the supply of larvae to the Aransas Pass Inlet? *Fish. Oceanogr.* 13(3):181-196.

Brown, C.A., G.A. Jackson, S.A. Holt, and G.J. Holt. 2005. Spatial and temporal patterns in modeled particle transport to estuarine habitat with comparisons to larval fish settlement patterns. *Estuar. Coast. Shelf Sci.* 64(1): 33–46.

Burgess, E.A., Booth, D.T. and Lanyon, J.M. 2006. Swimming performance of hatchling green turtles is affected by incubation temperature. *Coral Reefs* 25:341–349.

Carr, A. 1962. Orientation problems in the high seas travel and terrestrial movements of marine turtles. *American Scientist* 50(3):358-374. (as cited in NMFS et al. 2011)

Carr, A. 1982. Notes on the behavioral ecology of sea turtles. In: *Biology and conservation of sea turtles*. K.A. Bjorndal (ed). Smithsonian Institution Press, Washington, DC. pp. 19–26. (as cited in NMFS et al. 2011).

Carr, A., and Ogren, L. 1960. The ecology and migrations of sea turtles. 4. The green turtle in the Caribbean Sea, *American Museum of Natural History Bulletin*, 121, 1, 1960. (as cited in NMFS et al. 2011).

Christianson, A. G., F. H. Rainwater, M.A, Shirazi, and B.A. Tichenor. 1973. Reviewing environmental impact statements: power plant cooling systems, engineering aspects. U.S. Environmental Protection Agency (EPA), Pacific Northwest Environmental Research Laboratory. Corvallis. Oregon. Technical Series Report EPA-660/2-73-016

Compagno, L.J.V. 1984. Part 1 - Hexanchiformes to Lamniformes. *FAO Fish. Synop.* 125(4/1). *FAO Species Catalogue. Vol. 4. Sharks of the World. An annotated and illustrated catalogue of shark species known to date.* FAO, Rome, Italy, pp. 1-249.

Duffy, C., and M.P. Francis. 2001. Evidence of summer parturition in shortfin mako (*Isurus oxyrinchus*) sharks from New Zealand waters. *NZ J Mar Freshwater Res* 35:319-324.

EPRI (Electric Power Research Institute). 2007. Cooling Water Intake Structure Area-of-Influence Evaluations for Ohio River Ecological Research Program Facilities. 1015322. Electric Power Research Institute, Palo Alto, CA.

Froeschke, J.T., and B.F. Froeschke. 2011. Spatio-temporal predictive model based on environmental factors for juvenile spotted seatrout in Texas estuaries using boosted regression trees. *Fisheries Research* 111(3):131-138.

Froese, R., and D. Pauly (eds). 2022. FishBase. World Wide Web electronic publication. www.fishbase.org, version (06/2022).

Galveston Bay NEP. 1993. Non-fishing-human induced mortality of fisheries resources in Galveston Bay. Galveston Bay National Estuary Program. May.

Gibson, K.J., M.K. Streich, T.S. Topping, and G.W. Stunz. 2021. New insights into the seasonal movement patterns of shortfin mako sharks in the GOM. *Front. Mar. Sci.* 8:623104. doi: 10.3389/fmars.2021.623104

GMFMC. 2004. Final environmental impact statement for the generic amendment to the following fishery management plans of the Gulf of Mexico: Shrimp Fishery of the Gulf of Mexico, United States Waters; Red Drum Fishery of the Gulf of Mexico; Reef Fish Fishery of the Gulf of Mexico; Coastal Migratory Pelagic Resources (Mackerels) in the Gulf of Mexico and South Atlantic; Stone Crab Fishery of the Gulf of Mexico; Spiny Lobster in the Gulf of Mexico and South Atlantic; Coral and Coral Reefs of the Gulf of Mexico. Gulf of Mexico Fishery Management Council. Tampa, FL.

GMFMC. 2016. Final Report 5-Year Review of Essential Fish Habitat Requirements. Available online at: http://gulfcouncil.org/wp-content/uploads/EFH-5-Year-Review-plus-App-A-and-B_Final_12-2016.pdf. Accessed September 2022. Gulf of Mexico Fishery Management Council. December.

Greene, G.N., et al. 1979. Impingement Monitoring Studies, Sam Bertron Generating Station, Houston Lighting and Power Company, Environmental Protection Division, HL&P, Houston, TX. 84 pp. (as cited in GBNEP 1993)

Greene, G.N., et al. 1980. Impingement Monitoring Studies, P.H. Robinson. Houston Lighting and Power Company, Environmental Protection Division. 138 pp. (as cited in GBNEP 1993)

Hernandez, F.J., L. Carassou, S. Muffelman, S.P. Powers, and W.M. Graham. 2011. Comparison of two plankton net mesh sizes for ichthyoplankton collection in the northern Gulf of Mexico. *Fisheries Research* 108:327-335.

Holland, J.S., N.J. Maciolek, R.D. Kalke, and C.H. Oppenheimer. 1973. A benthos and plankton study of the Corpus Christi, Copano and Aransas Bay systems. I: Report on the methods used and data collected during the period September 1972-June 1973. First Annual Report to the Texas Water Development Board December 1973. University of Texas Marine Science Institute at Port Aransas.

Holland, J.S., N.J. Maciolek, R.D. Kalke, and C.H. Oppenheimer. 1974. A benthos and plankton study of the Corpus Christi, Copano and Aransas Bay systems. II: Report on the data collected during the period July, 1973-April, 1974. Second Annual Report to the Texas Water Development Board December 1973. University of Texas Marine Science Institute at Port Aransas.

Holt, J., R. Godbout, and C.R. Arnold. 1981a. Effects of temperature and salinity on egg hatching and larval survival of red drum, *Sciaenops ocellata* [USA]. *Fishery bulletin United States, National Marine Fisheries Service*.

Holt, J., A.G. Johnson, C.R. Arnold, W.A. Fable Jr., and T.D. Williams. 1981b. Description of eggs and larvae of laboratory reared red drum, *Sciaenops ocellata*. *Copeia*, 751-756.

Jobe, W.D., et al. 1980. Studies on Survival of Nektonic Organisms after Passage through the Fish Pump System and Exposure to Thermal Shock at the Cedar Bayou Generating Station, Houston Lighting and Power Company. Final Report, Project No. 01-5169. Southwest Research Institute, Houston, TX. 25 pp. (as cited in GBNEP 1993)

Johnson, D.R. 2008. Ocean surface current climatology on the northern Gulf of Mexico. Published by the Gulf Coast Research Laboratory, Ocean Springs, MS. Project funded by the Marine Fisheries Initiative (MARFIN) program of the NMFS/NOAA.

Joung, S.J., N.F. Chen, H.H. Hsu, and K.M. Liu. 2016. Estimates of life history parameters of the oceanic whitetip shark, *Carcharhinus longimanus*, in the western north Pacific Ocean. *Mar Biol Res* 12:758-768.

Landry, A.M. 1977. Life History and Susceptibility of Fish in Galveston Bay, Texas to Power-Plant Cooling-Water Operations. Ph.D. Dissertation. Texas A&M University, Wildlife and Fisheries Sciences. College Station, Texas. 546 pp. (as cited in GBNEP 1993)

Lassuy, D.R. 1983a. Species profiles: life histories and environmental requirements (Gulf of Mexico) - Atlantic croaker. U.S. Fish and Wildlife Service, Division of Biological Services. FWS/OBS-82/11.3. U.S. Army Corps of Engineers, TR EL-82-4. 12 pp.

Lassuy, D.R. 1983b. Species profiles: life histories and environmental requirements (Gulf of Mexico) - spotted seatrout. U.S. Fish and Wildlife Service, Division of Biological Services. FWS/OBS-82/11.4. U.S. Army Corps of Engineers, TR EL-82-4. 14 pp.

Lessa, R., F.M. Santana, and R. Paglerani. 1999. Age, growth and stock structure of the oceanic whitetip shark, *Carcharhinus longimanus*, from the southwestern equatorial Atlantic. *Fish Res* 42:21-30.

Lohmann, K., A.W. Swartz, and C. Lohmann. 1995. Perception of ocean wave direction by sea turtles. *J. Exp. Biol.* 198:1079-85. 10.1242/jeb.198.5.1079.

Lutz, P.L., and J.A. Musick (eds). 1997. *The biology of sea turtles*. CRC Press LLC, New York, NY.

Miller, E., C. Wails, and J. Sulikowski. 2022. It's a shark-eat-shark world, but does that make for bigger pups? A comparison between oophagous and non-oophagous viviparous sharks. *Reviews in Fish Biology and Fisheries*. 32. 10.1007/s11160-022-09707-w.

Miller, M.H., and C. Klimovich. 2017. Endangered Species Act Status Review Report: Giant Manta Ray (*Manta birostris*) and Reef Manta Ray (*Manta alfredi*). Report to National Marine Fisheries Service, Office of Protected Resources, Silver Spring, MD. September 2017. 128 pp.

Moulton, D.L., M.A. Dance, J.A. Williams, M.Z. Sluis, G.W. Stunz, and J.R. Rooker. 2017. Habitat partitioning and seasonal movement of red drum and spotted seatrout. *Estuaries and Coasts* 40(3):905-916.

NMFS. 2012. Fisheries Economics of the United States, 2011. U.S. Dept. Commerce, NOAA Tech. Memo. NMFS-F/SPO-128. Available at: <https://www.fisheries.noaa.gov/resource/document/fisheries-economics-united-states-2011-full-report>. National Marine Fisheries Service. 175 pp.

NMFS. 2016. Endangered Species Act - section 7 consultation biological opinion on U.S. Nuclear Regulatory Commission's continued operation of the St. Lucie Nuclear Power Plant's circulating seawater cooling system, Jensen Beach, Hutchinson Island, Florida. SER-2006-832, Southeast Region, NMFS, NOAA, U.S. Department of Commerce, St. Petersburg, Florida.

NMFS. 2017. Final Amendment 10 to the 2006 Consolidated Atlantic Highly Migratory Species Fishery Management Plan: Essential Fish Habitat and Environmental Assessment. National Marine Fisheries Service. National Oceanic and Atmospheric Administration. Office of Sustainable Fisheries. Atlantic Highly Migratory Species Management Division.

NMFS, USFWS, and SEMARNAT. 2011. Bi-National Recovery Plan for the Kemp's Ridley Sea Turtle (*Lepidochelys kempii*), Second Revision. National Marine Fisheries Service. Silver Spring, Maryland 156 pp. + appendices. <https://repository.library.noaa.gov/view/noaa/4368>

NOAA. 2007. Magnuson-Stevens Fishery Conservation and Management Act. U.S. Department of Commerce, National Oceanic and Atmospheric Administration, National Marine Fisheries Service. Public Law 94-265. As amended by the Magnuson-Stevens Fishery Conservation and Management Reauthorization Act (P.L. 109-479).

NOAA. 2022. Threatened and Endangered Species and Critical Habitats under National Oceanic and Atmospheric Administration (NOAA) Fisheries Jurisdiction. <https://www.fisheries.noaa.gov/species-directory/threatened-endangered>. Accessed September 2022. Last updated by Southeast Regional Office on 9/1/2021.

NRC. 1985. Sea Turtle Intake Entrapment Studies. Available at: <https://www.nrc.gov/docs/ML1721/ML17215A861.pdf>. Nuclear Regulatory Commission.

Olsen, Z. 2022. Personal communication (email correspondence between M. Abbene, Integral Consulting Inc., and Z. Olsen, Texas Parks and Wildlife Department, RE: Request for Texas Coastal Fisheries Data, dated August 30, 2022).

Pattillo, M.E., T.E. Czapla, D.M. Nelson, and M.E. Monaco. 1997. Distribution and abundance of fishes and invertebrates in Gulf of Mexico estuaries, Volume II: Species life history

summaries. ELMA Rep. No. 11. NOAA/ NOS Strategic Environmental Assessments Division, Silver Spring, MD. 377 pp.

Perry, H.M., and T.D. McIlwain. 1986. Species profiles: life histories and environmental requirements of coastal fishes and invertebrates (Gulf of Mexico): blue crab. U.S. Fish and Wildlife Service Biological Report 82(11.55). U.S. Army Corps of Engineers, TR EL-82-4. 21 pp.

Rambahianarison J.M., M.J. Lamoste, C.A. Rohner, R. Murray, S. Snow, J. Labaja, et al. 2018. Life history, growth, and reproductive biology of four mobulid species in the Bohol Sea, Philippines. *Frontiers in Marine Science*. 5:269. doi: 10.3389/fmars.2018.00269.

Reagan, R.E. 1985. Species profiles: life histories and environmental requirements of coastal fishes and invertebrates (Gulf of Mexico) - red drum. U.S. Fish and Wildlife Service Biological Report 82(11.36). U.S. Army Corps of Engineers, TR EL-82-4. 17 pp.

Reich, K.J., K.A. Bjorndal, and A.B. Bolten. 2007. The 'lost years' of green turtles: Using stable isotopes to study cryptic lifestages. *Biol Lett* 3:712–714. <https://doi.org/10.1098/rsbl.2007.0394>

Salmon, M., and J. Wyneken. 1987. Orientation and swimming behavior of hatchling loggerhead turtles *Caretta caretta* L. during their offshore migration. *Journal of Experimental Marine Biology and Ecology*. 109. 137-153. 10.1016/0022-0981(87)90012-8.

Schmidly, D.J., and R. D. Bradley. 2016. *The Mammals of Texas*. Seventh Edition. University of Texas Press. Available at: <https://www.depts.ttu.edu/nsrl/mammals-of-texas-online-edition/>

Shaver, D.J. 1991. Feeding ecology of Kemp's Ridley in south Texas waters. *Journal of Herpetology* 25:327–334

Shepherd, M.A., A. Labay, P.J. Shea, R. Rautiainen, and C. Achutan. 2016. Operational, water quality and temporal factors affecting impingement of fish and shellfish at a Texas coastal power plant. *Global Ecology and Conservation* 5:48-57.

Sink, T., R. Vega, and J. Butler. 2018. Red drum: Reproductive biology, brood stock management, and spawning. Southern Regional Aquaculture Center. Publication No. 0320.

Sonnichsen, J.C., Bentley, G.F. Bailey, and R.E. Nakatani. 1973. A review of thermal power plant intake structure designs and related environmental considerations. Hanford Engineering Development Laboratory, Richland. Washington. HEDL-TME 73-24. UC-12.

Southwest Research Institute (SRI) (unpublished impingement study data; as cited in GBNEP 1993)

Stunz, G.W., and P.A. Montagna. 2015. TM 2.1–Identification and Characterization of Potential Environmental Impacts Mitigation Measures Related to Intake and Discharge Facilities of

Seawater Desalination Plants. Variable Salinity Desalination Demonstration Project, City of Corpus Christi. July 10.

Tenera Environmental. 2010a. Entrainment and impingement effects from operation of the Huntington Beach Desalination Facility in standalone mode. Prepared for Poseidon Resources Corporation. Tenera Environmental. February. 158 pp.

Tenera Environmental. 2010b. Open Ocean Intake Effects Study. Prepared for City of Santa Cruz. Tenera Environmental. December. 319 pp.

Tissot, P.E., J. Rizzo, and D.D. Williams. 2015. Nearshore wave and current measurements/predictions on the Texas coast. 95th American Meteorological Society Annual Meeting, 13th Symposium on the Coastal Environment. July 2015. Phoenix, AZ.

TPWD. 2022. Texas Parks and Wildlife Department, Wildlife Division, Diversity and Habitat Assessment Programs. TPWD County Lists of Protected Species and Species of Greatest Conservation Need. <https://tpwd.texas.gov/gis/rtest/>. Accessed 8/18/2022. Last Updated 7/12/2022.

TXNDD. 2019. Element Occurrence data export. Wildlife Diversity Program of Texas Parks & Wildlife Department, Texas Natural Diversity Database. Available at https://tpwd.texas.gov/huntwild/wild/wildlife_diversity/txnidd/.

USEPA. 1997. Ecological Risk Assessment Guidance for Superfund: Process for Designing and Conducting Ecological Risk Assessments. EPA-540-R-97-006. U.S. Environmental Protection Agency.

USEPA. 2000. Economic and Engineering Analyses of the Proposed New Facility Rule. EPA-821-R-00-019. U.S. Environmental Protection Agency.

USEPA. 2011. Technical Development Document for the Proposed Section 316(b) Phase II Existing Facilities Rule. EPA-821-R-11-001. U.S. Environmental Protection Agency.

USEPA. 2014. Technical Development Document for the Final Section 316 (b) Phase II Existing Facilities Rule (Final). Vol. 7. EPA 821-R-04, 2004. U.S. Environmental Protection Agency.

Valverde R.A., and K.R. Holzgart. 2017. Sea Turtles of the Gulf of Mexico. In: Habitats and Biota of the Gulf of Mexico: Before the Deepwater Horizon Oil Spill. C. Ward (ed.). Springer, New York, NY. pp. 1189–1351.

Wang, J.H., J.K. Jackson, and K.J. Lohmann. 1998. Perception of wave surge motion by hatchling sea turtles. *J. Exp. Mar. Biol. Ecol.* 229:177-186. (as cited in NMFS et al. 2011)

Ward, G.H. 2012. The blue crab: a survey with application to San Antonio Bay. Center for Research in Water Resources.

Ward-Geiger, L.I., A.R. Knowlton, A.F. Amos, T.D. Pitchford, B. Mase-Guthrie, and B.J. Zoodsma. 2011. Recent Sightings of the North Atlantic Right Whale in the Gulf of Mexico. *Gulf of Mexico Science* 29 (1). Retrieved from <https://aquila.usm.edu/goms/vol29/iss1/6>

WateReuse Association. 2011. Desalination Plant Intakes: Impingement and Entrainment Impacts and Solutions. https://watereuse.org/wp-content/uploads/2015/10/IE_White_Paper.pdf

WCM Group Inc. 2020. Cooling Alternatives and Appendix A, Impingement and Entrainment Monitoring Study, in Texas Commission on Environmental Quality, Permit renewal with changes to discharge, deposit or dispose of waste(s) into or adjacent to water in the state. Permit No. WQ0001244000. March 2020 (downloadable at www.wcmgroup.com or via Google Search).

Witherington, B.E. 1992. Unpublished data, as cited in Lutz and Musick 1997.

Witherington, B.E. 1995. Observations of hatchling loggerhead turtles during the first few days of the lost year(s). pp. 154–157. In: Proceedings of the 12th Annual Workshop on Sea Turtle Biology and Conservation. NOAA Technical Memorandum NMFS-SEFSC-361. (as cited in NMFS et al. 2011)


Wyneken, J. 1997. Sea turtle locomotion: Mechanics, behavior, and energetics. In: The Biology of Sea Turtles. P.L. Lutz and J.A. Musick (eds.). CRC Press, Boca Raton, FL. pp. 165-198.

Wyneken, J., and M. Salmon. 1992. Frenzy and postfrenzy swimming activity in loggerhead, green, and leatherback hatchling sea turtles. *Copeia* 1992:478–484. (as cited in NMFS et al. 2011)

Wyneken, J., M. Salmon, and K. Lohmann. 1990. Orientation by hatchling loggerhead sea turtles *Caretta caretta* L. in a wave tank. *J. Exp. Mar. Biol. Ecol.* 139:43-50. 10.1016/0022-0981(90)90037-D.

Young, C.N., J. Carlson, M. Hutchinson, C. Hutt, D. Kobayashi, C.T McCandless, J. Wraith. 2017. Status review report: Oceanic whitetip shark (*Carcharhinus longimanus*). Final Report to the National Marine Fisheries Service, Office of Protected Resources. December 2017. 170 pp.

Figures

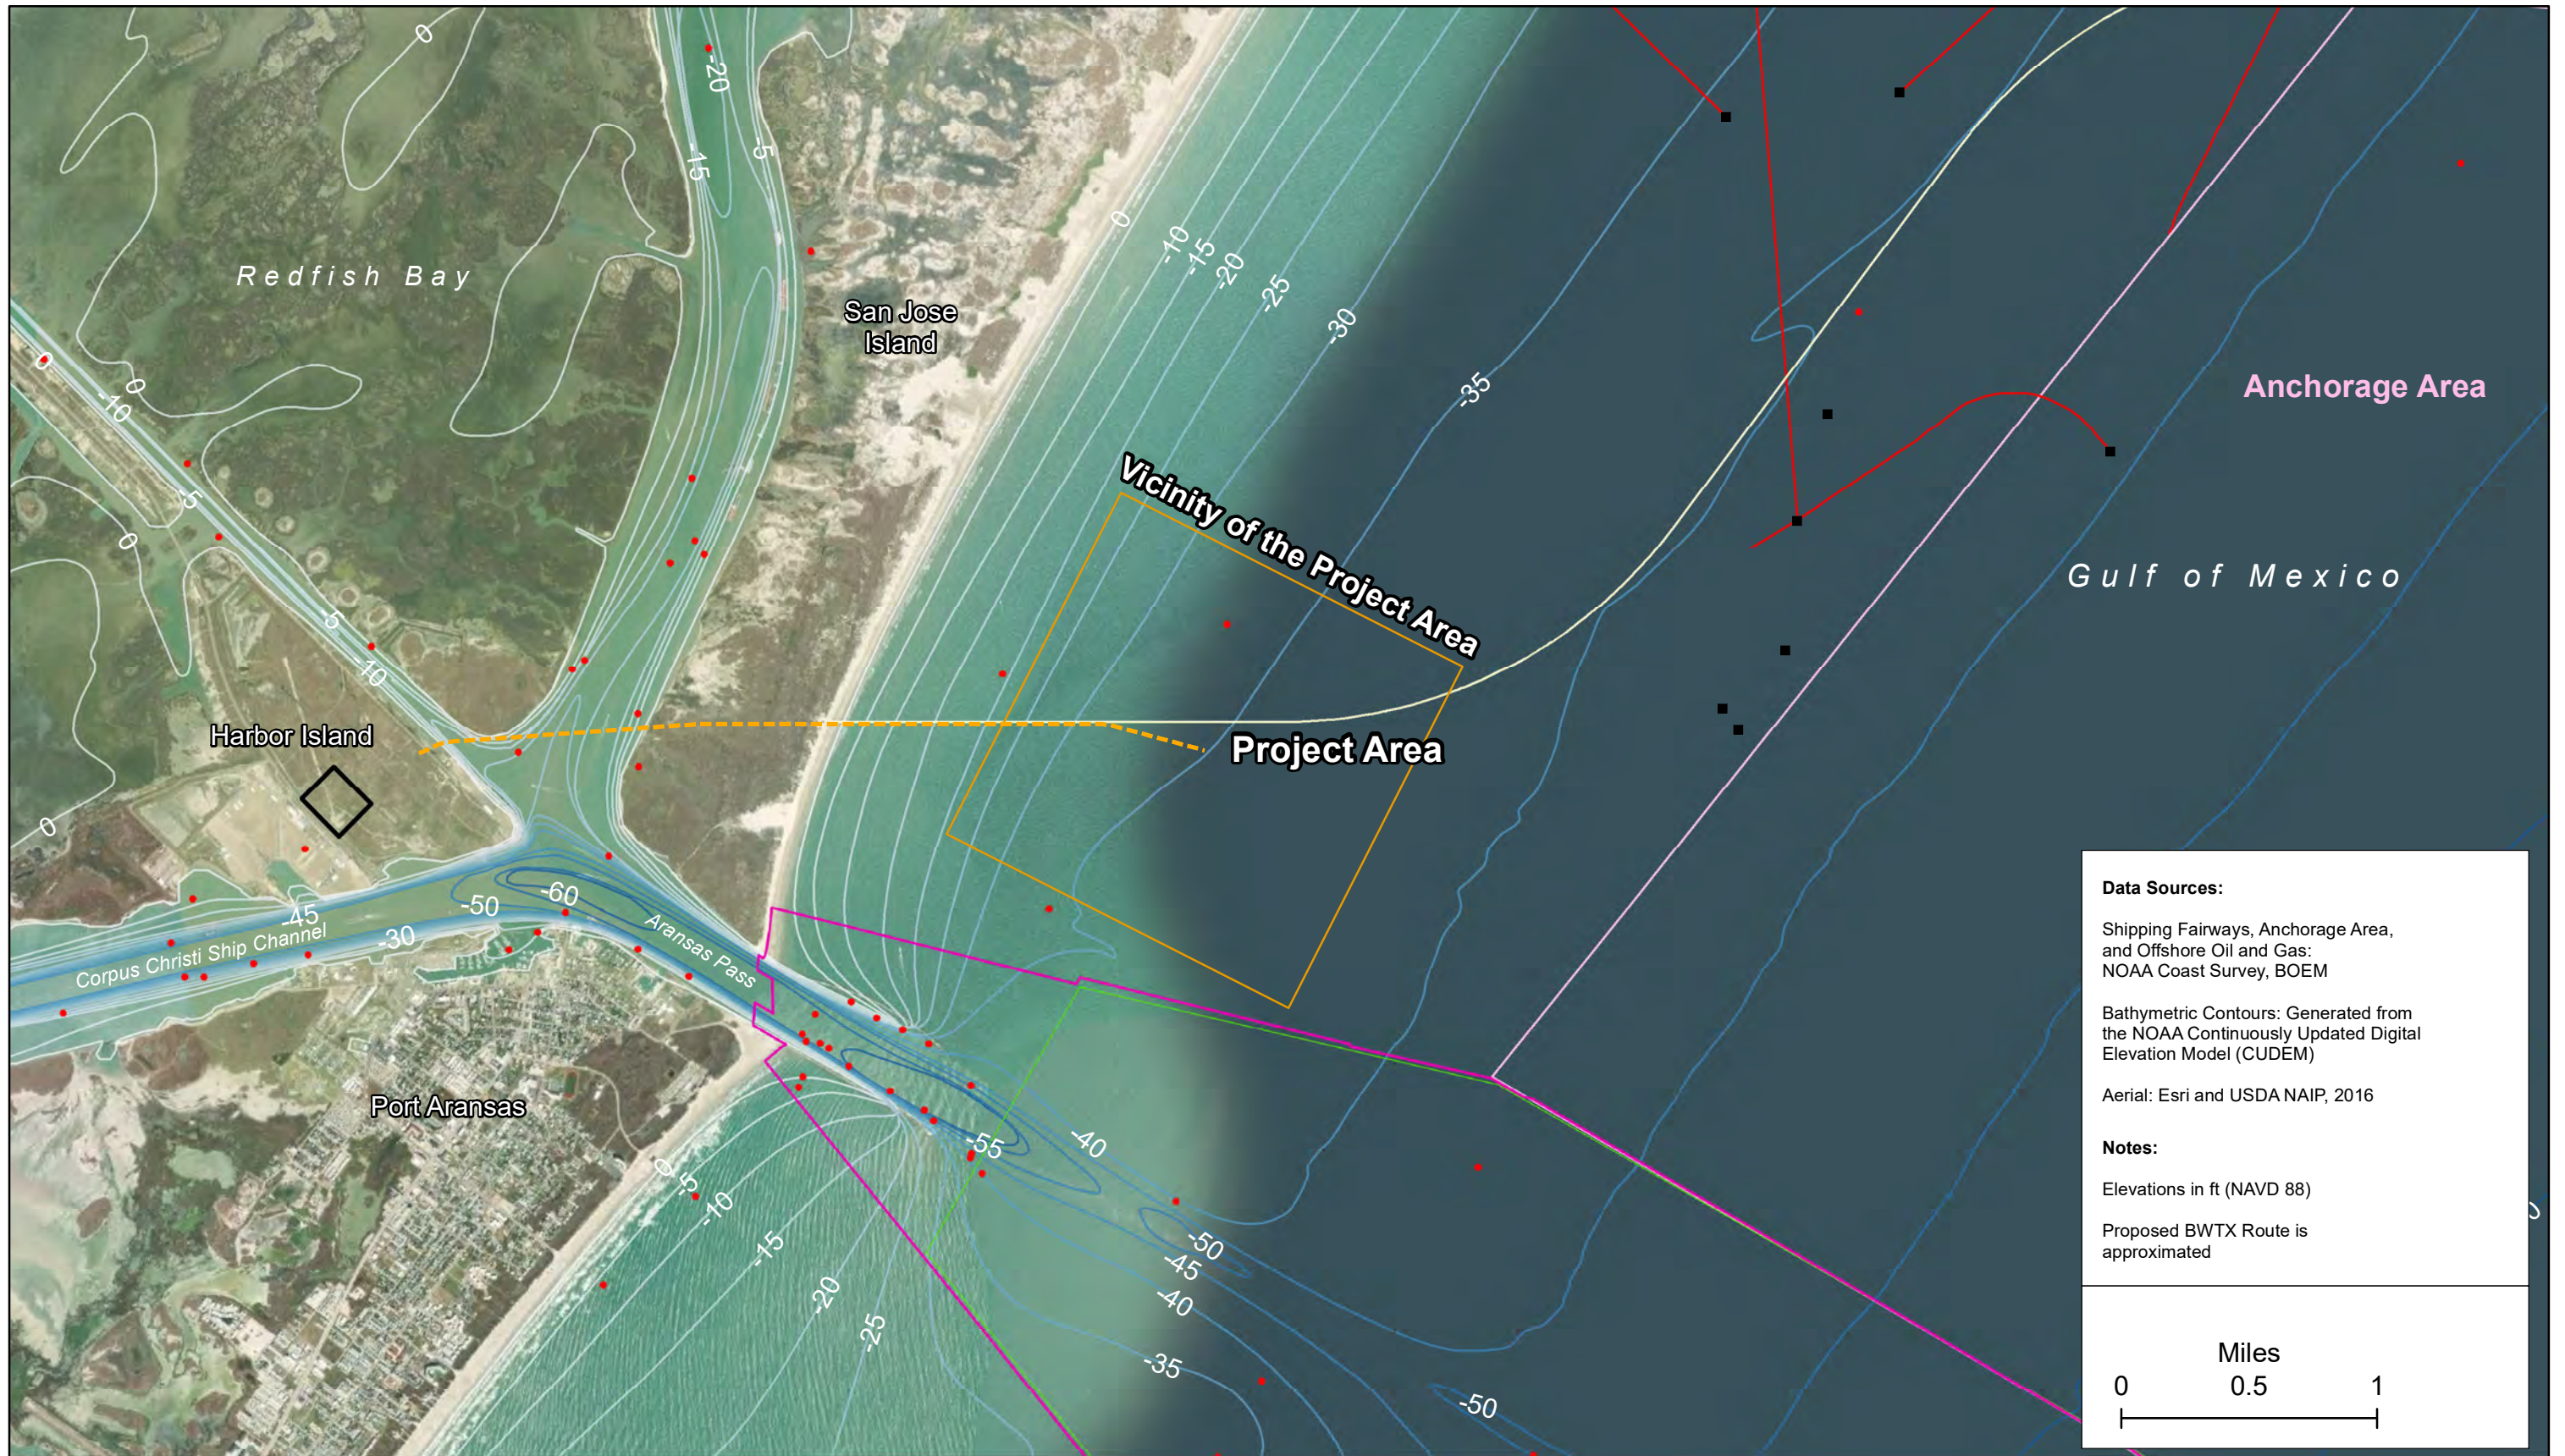

Data Sources:

Shipping Fairways, Anchorage Area, and Offshore Oil and Gas: NOAA Coast Survey, BOEM

Bathymetric Contours: Generated from the NOAA Continuously Updated Digital Elevation Model (CUDEM)

Aerial: Esri and USDA NAIP, 2016

Notes:

Elevations in ft (NAVD 88)

Proposed BWTX Route is approximated

Figure 1-1
 Approximate Locations of the Proposed Desalination Facility, the State Water Intake Structure, and the Intake Tunnel

Legend	 Proposed Location of the Intake Tunnel	 Approximate Location of the Proposed Desalination Facility	 Anchorage Area	 Proposed BWTX Route
	 Proposed Location of the Intake Structure		 Shipping Fairways	 Offshore Oil & Gas Pipelines
			 Wrecks and Obstructions	 Offshore Oil & Gas Feature



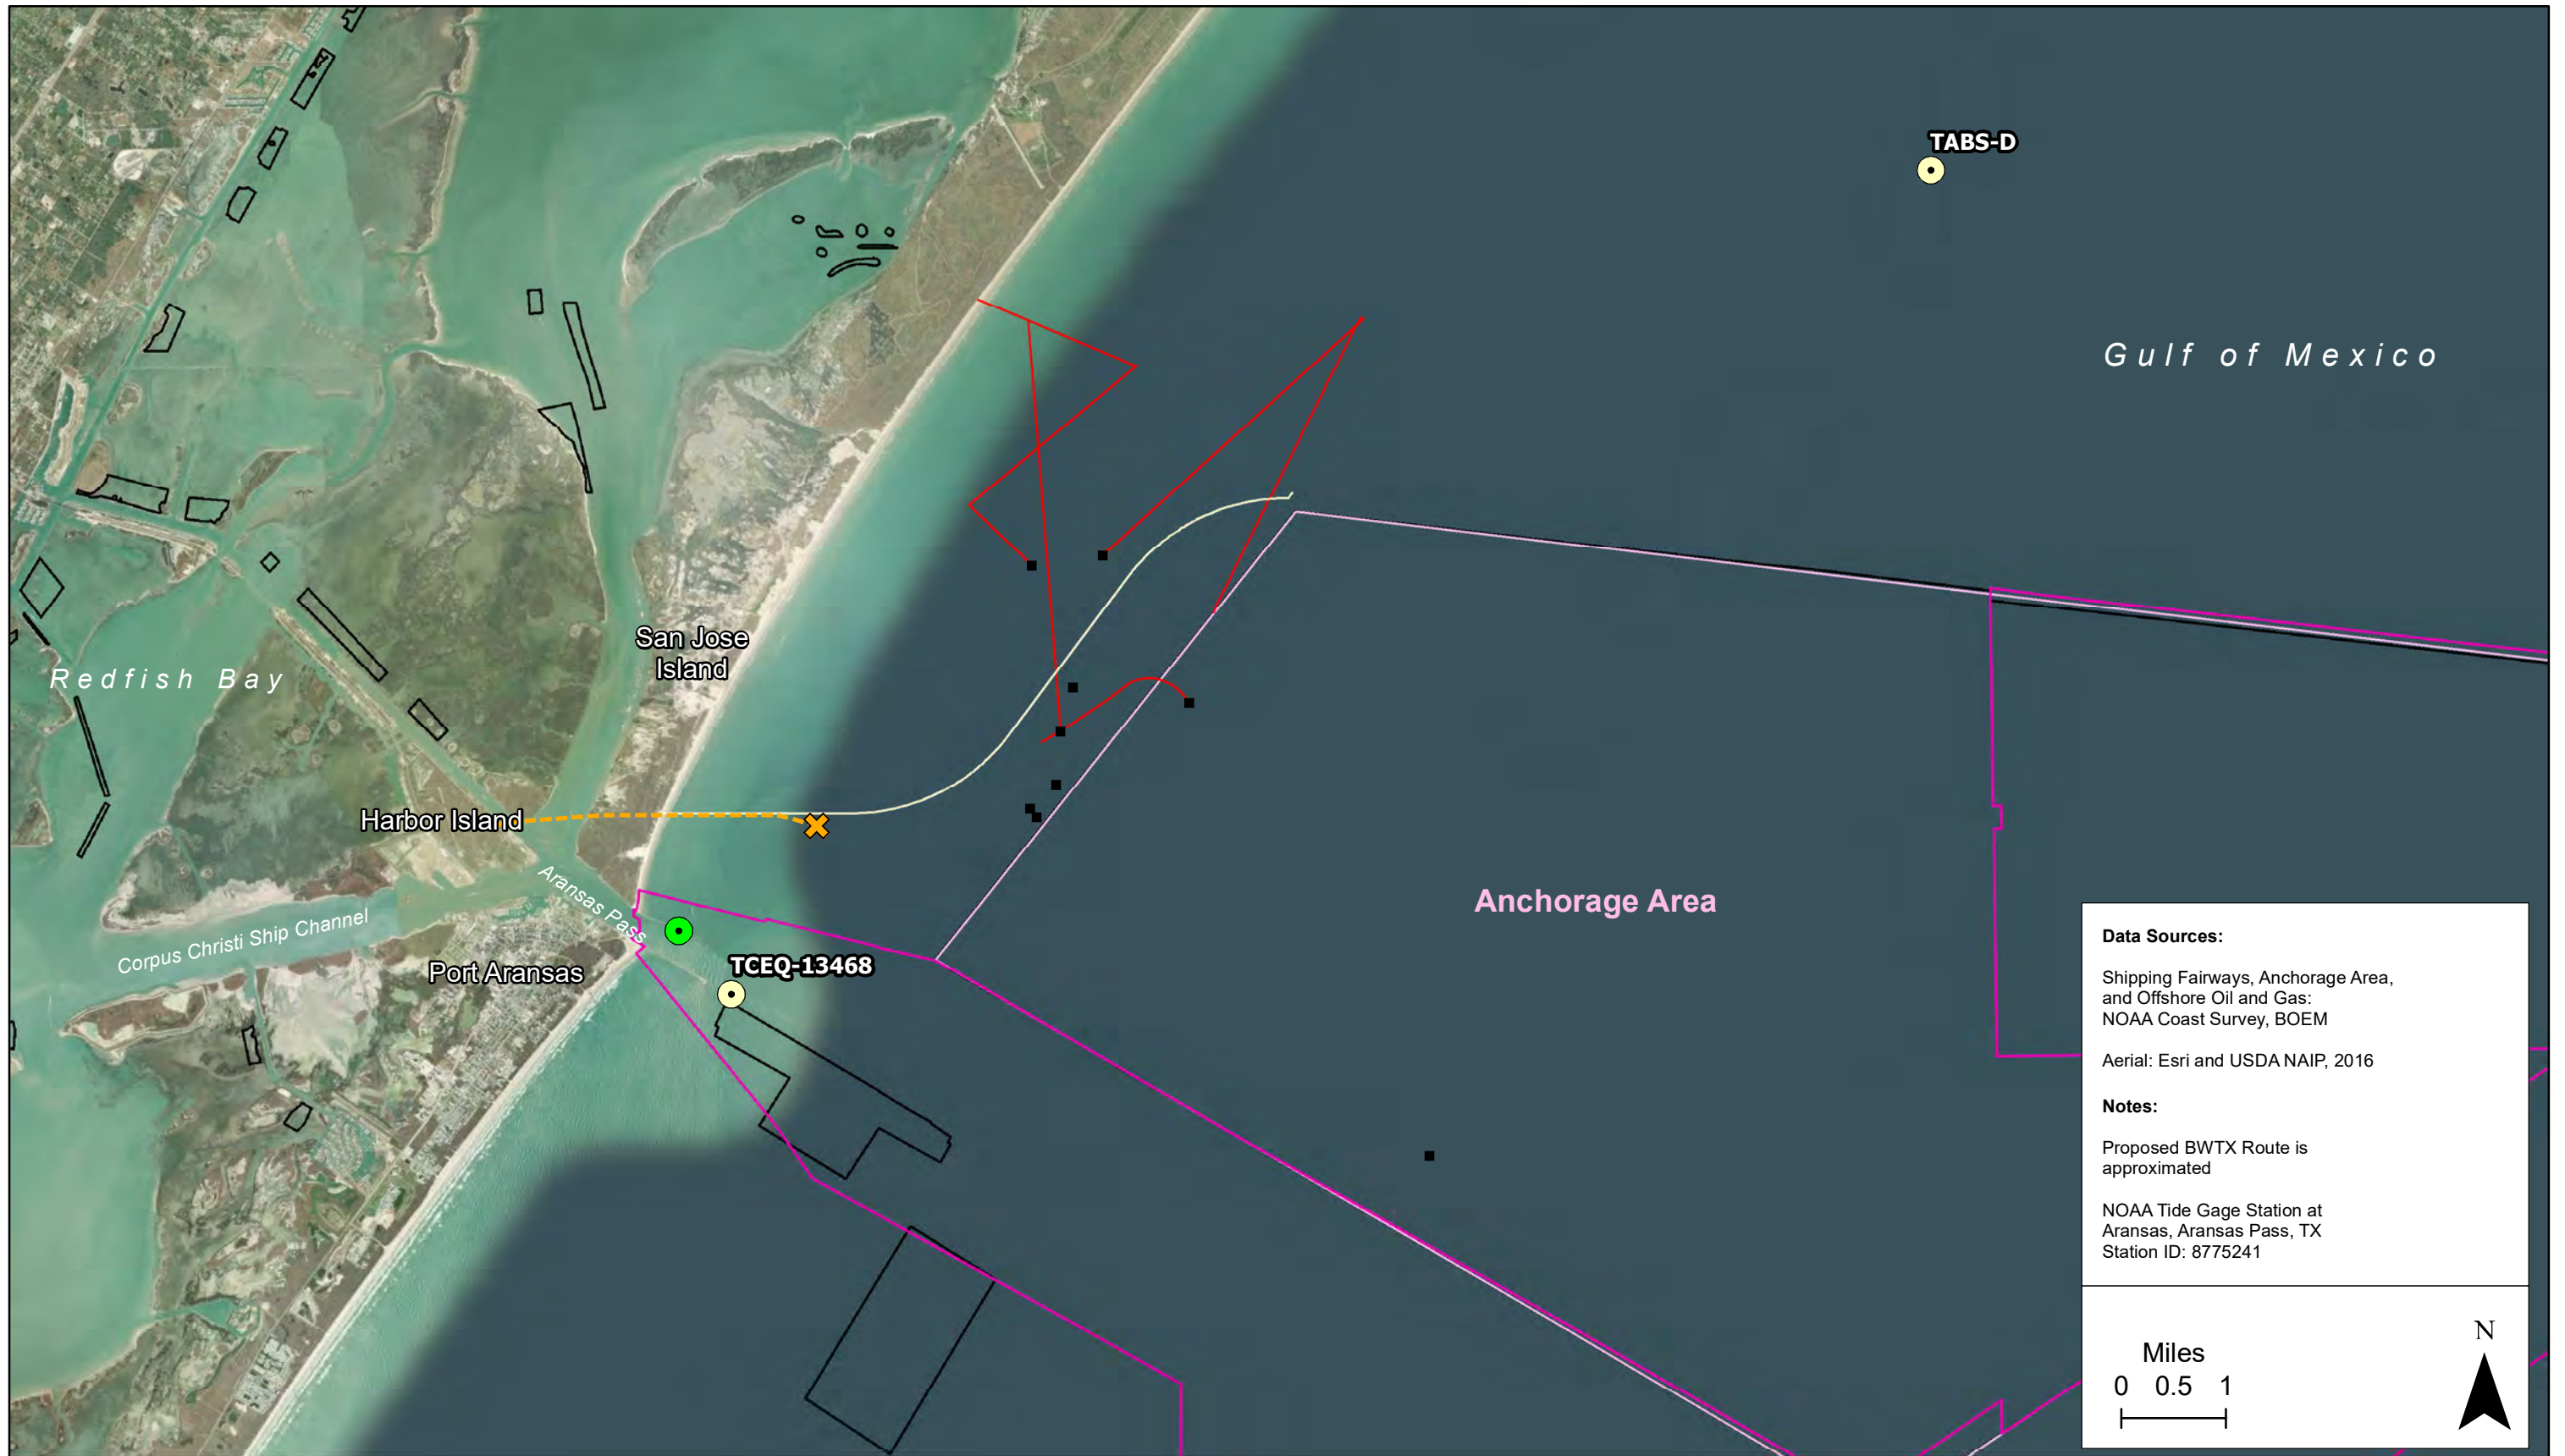


Figure 2-1
Locations of the Three Monitoring Buoys Used to Obtain Measured Data on Surface Water Levels, Salinities, Temperatures, and Tidal Currents




Legend

- Buoys**
 - TCEQ (Texas Commission on Environmental Quality)
 - TABS (Texas Automated Buoy System)
- Proposed Location of the Intake Structure** (Yellow X)
- Proposed Location of the Intake Tunnel** (Dashed Yellow Line)
- Anchorage Area** (Pink outline)
- Shipping Fairways** (Magenta outline)
- Disposal Site** (Black outline)
- NOAA Tide Gage Station** (Green circle)
- Proposed BWTX Route** (Thick grey line)
- Offshore Oil & Gas Pipelines** (Red line)
- Offshore Oil & Gas Feature** (Black square)

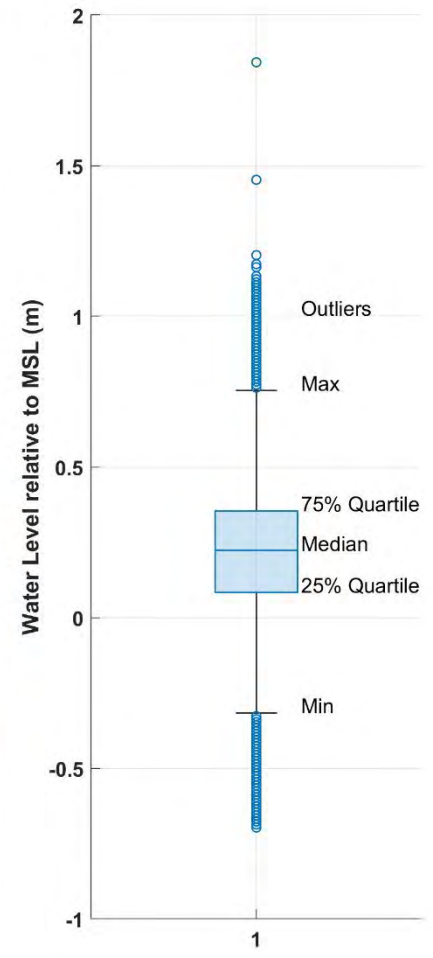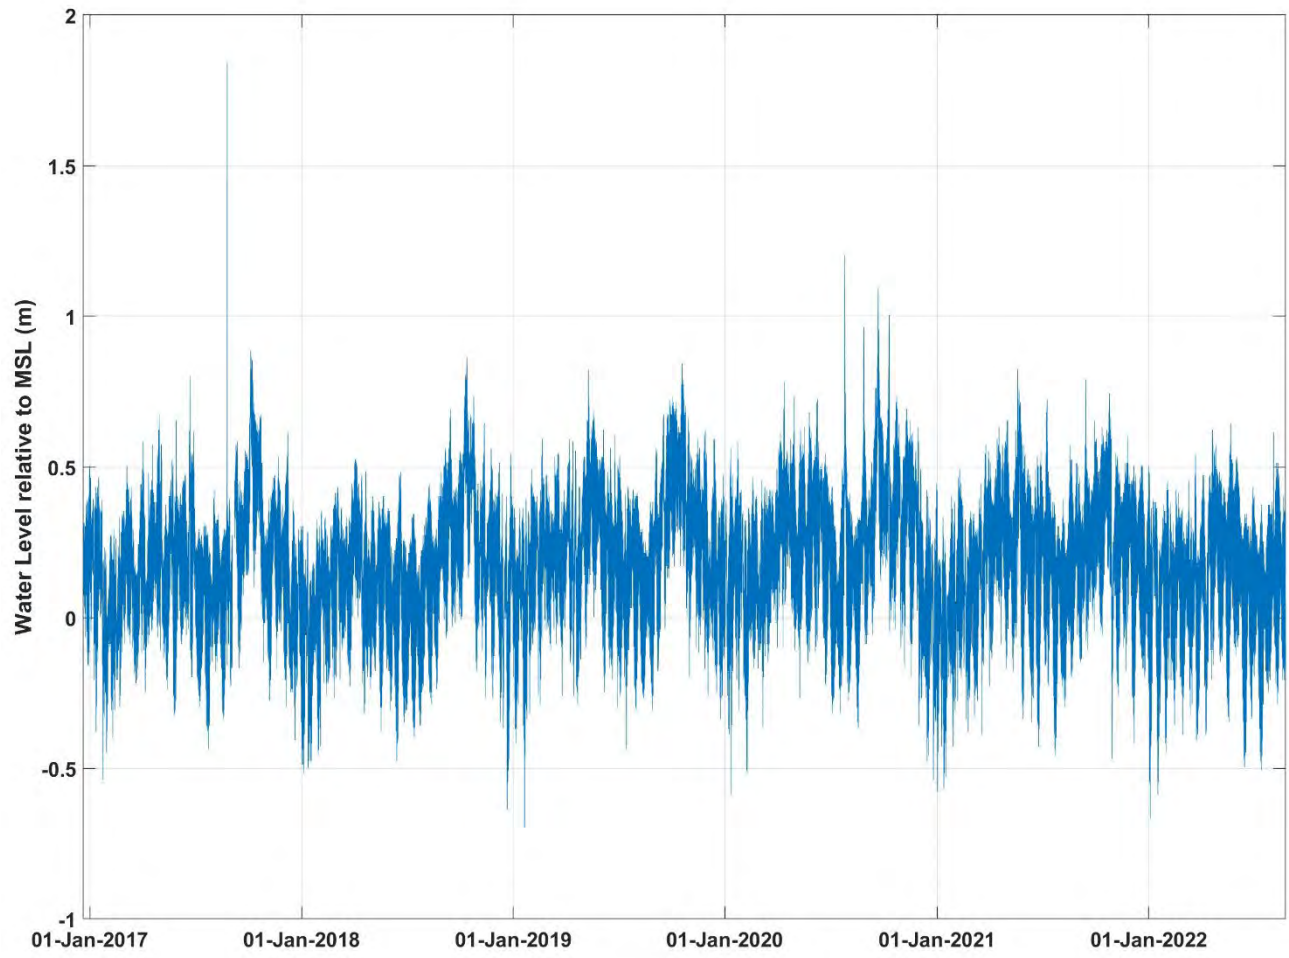

Notes: Data source: <https://tidesandcurrents.noaa.gov/stationhome.html?id=8775241>

Box and whisker plots indicate the median, 25th and 75th quartile, statistical minimum and maximum, and outlier points. Outliers are defined as either greater than $1.5 \cdot \text{IQR} + 75\text{th percentile value}$ or less than $25\text{th percentile} - 1.5 \cdot \text{IQR}$.

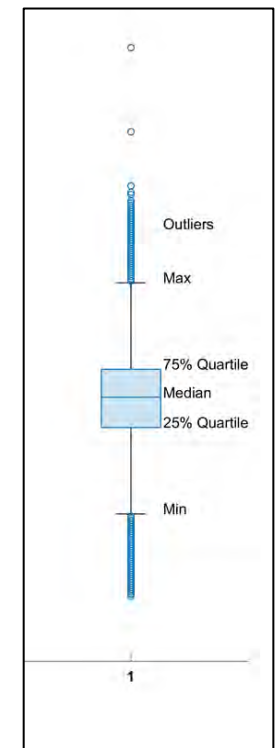
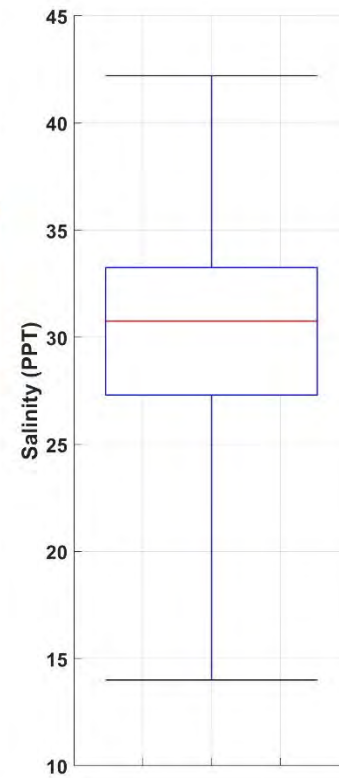
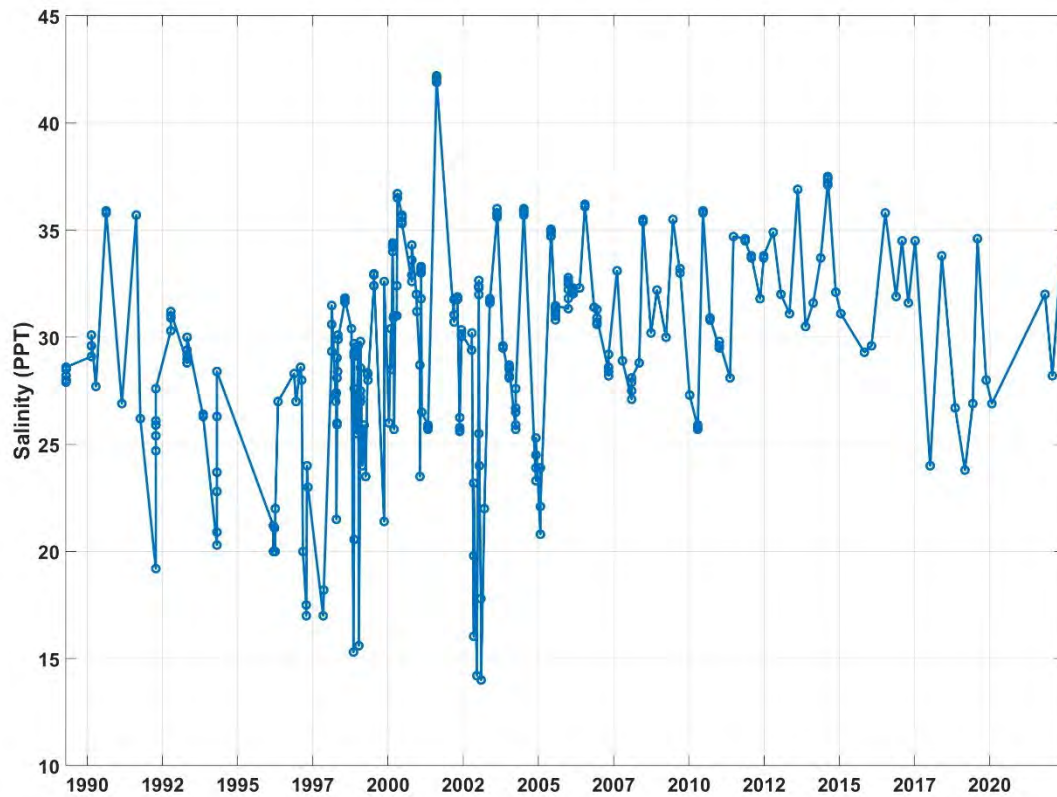


Box-chart reference guide

Notes : Data sourced from the measurements collected by the Texas Commission on Environmental Quality at monitoring station 13468
 Box and whisker plots indicate the median, 25th and 75th quartile, statistical minimum and maximum, and outlier points. Outliers are defined as either greater than $1.5 \times \text{IQR} + 75^{\text{th}}$ percentile value or less than 25^{th} percentile - $1.5 \times \text{IQR}$ (note: this salinity dataset does not contain any outliers)




Figure 2-3.
 Monthly Variations in the Surface Water Salinities Measured in the Gulf of Mexico at Aransas Inlet between 1989 and 2022

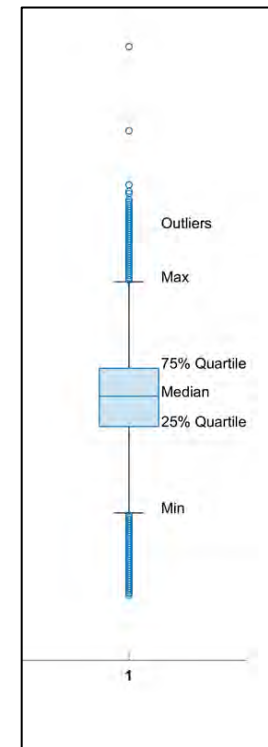
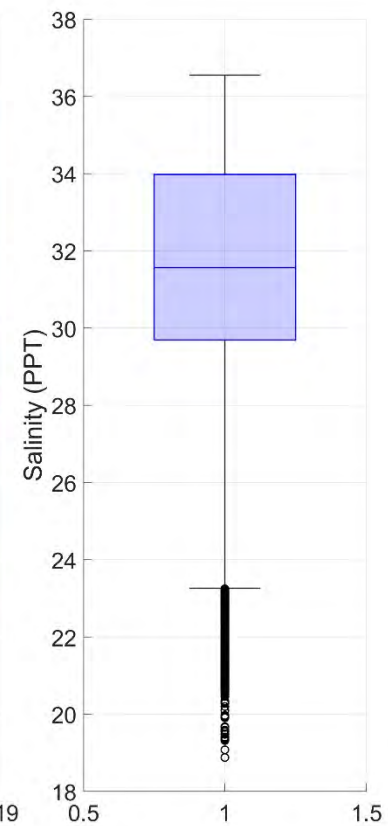
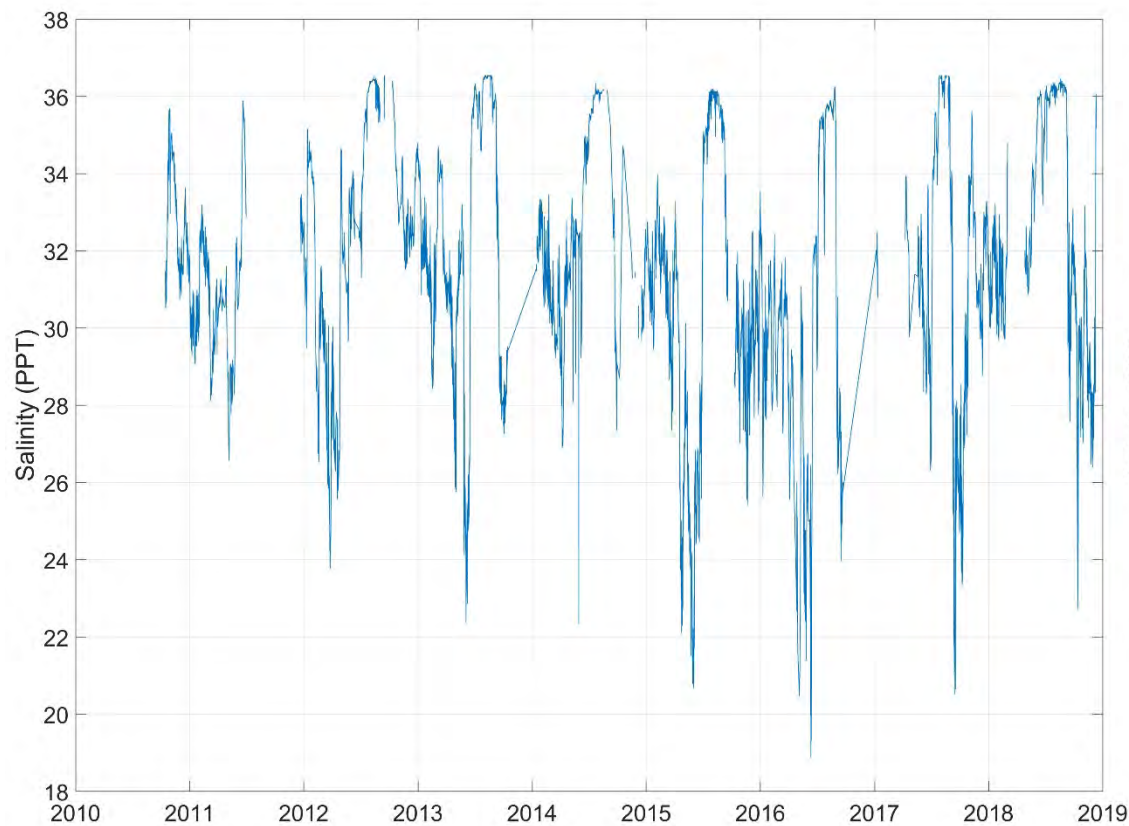


Box-chart reference guide

Notes: Data were sourced through GCOOS for TABS Buoy D. <https://tabs.gerg.tamu.edu/tglo/ven.php?buoy=D>. The data were filtered to remove outliers that fell outside of the physical ranges.

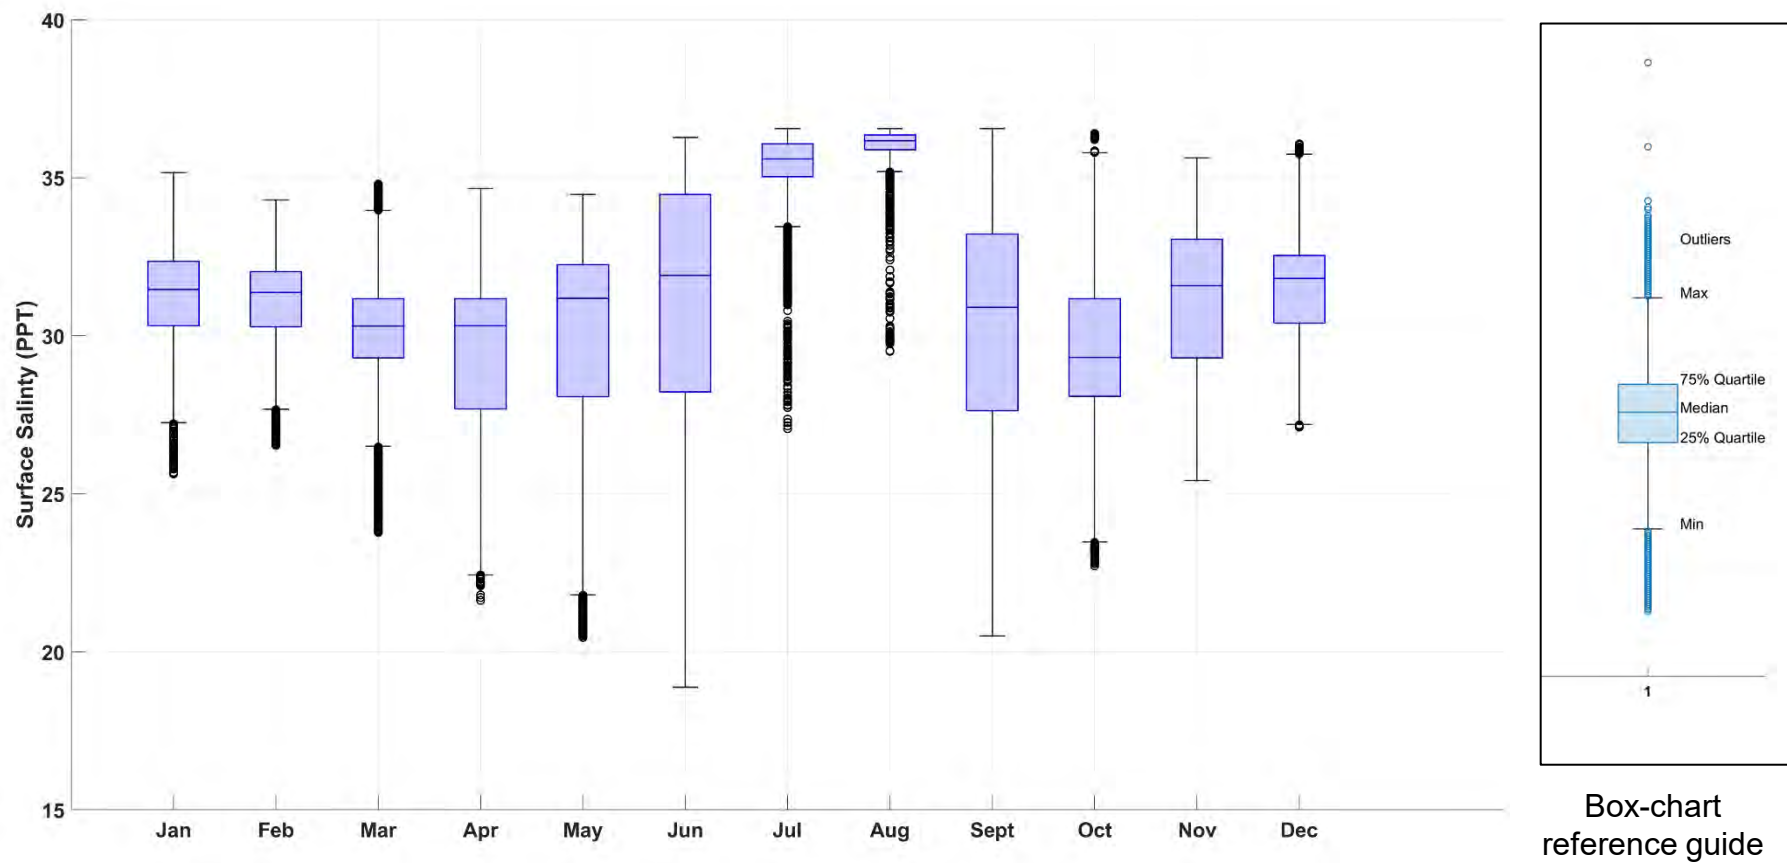

Notes: Data were sourced through GCOOS for TABS Buoy D. <https://tabs.gerg.tamu.edu/tglo/ven.php?buoy=D>. The data were filtered to remove outliers that fell outside of physical ranges.

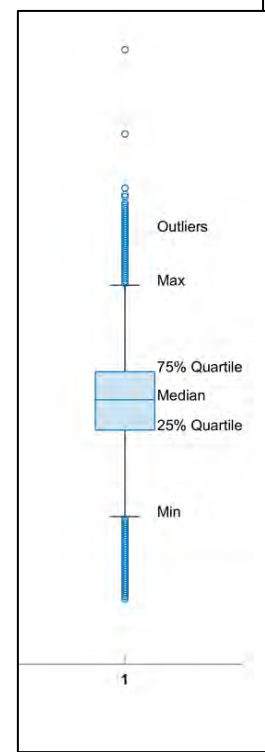
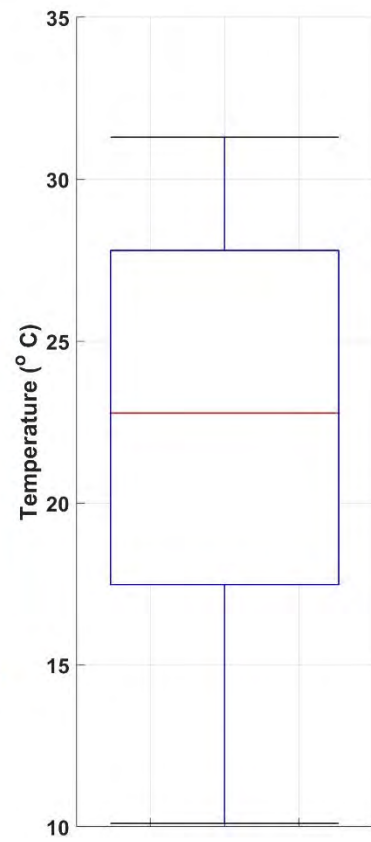
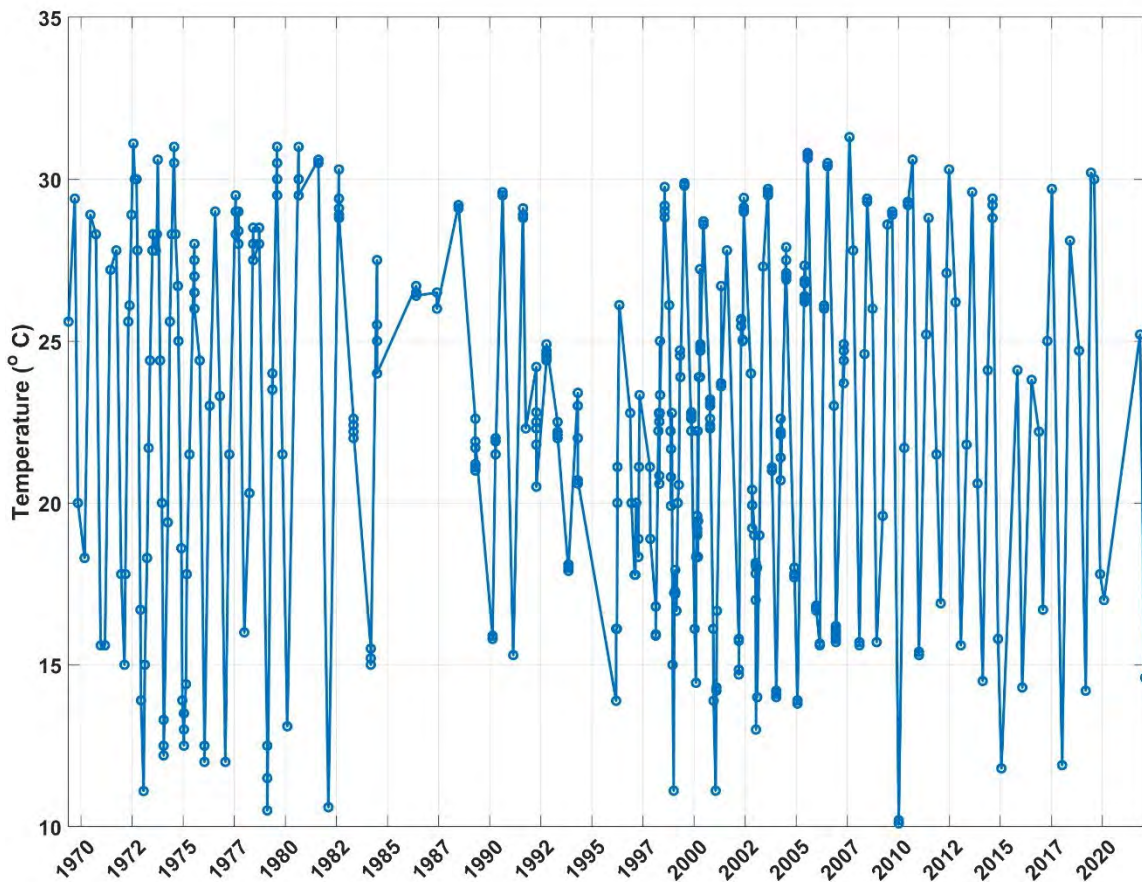


Box-chart reference guide

Notes: Data sourced from the measurements collected by Texas Commission on Environmental Quality at monitoring station 13468. Box and whisker plots indicate the median, 25th and 75th quartile, statistical minimum and maximum, and outlier points. Outliers are defined as either greater than $1.5 \cdot IQR + 75^{th}$ percentile value or less than 25^{th} percentile - $1.5 \cdot IQR$ (note: this surface water temperature data set does not contain any outliers).




Figure 2-6. Monthly Variations in Surface Water Temperatures Measured in the Gulf of Mexico at Aransas Inlet between 1989 and 2022

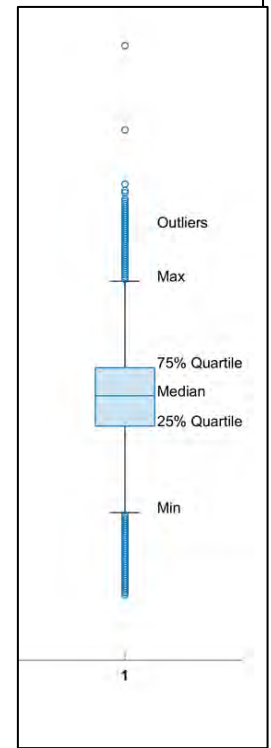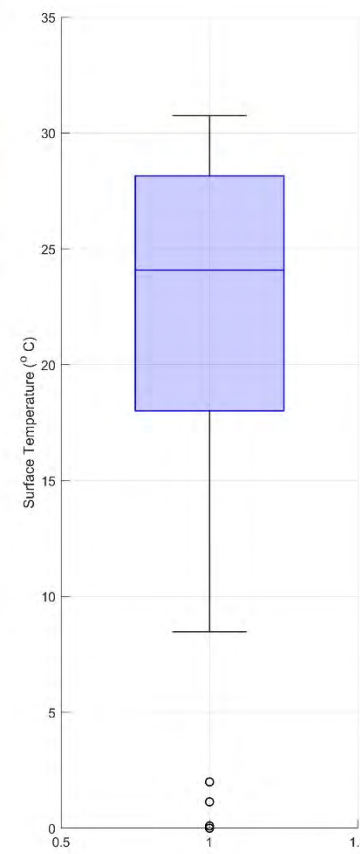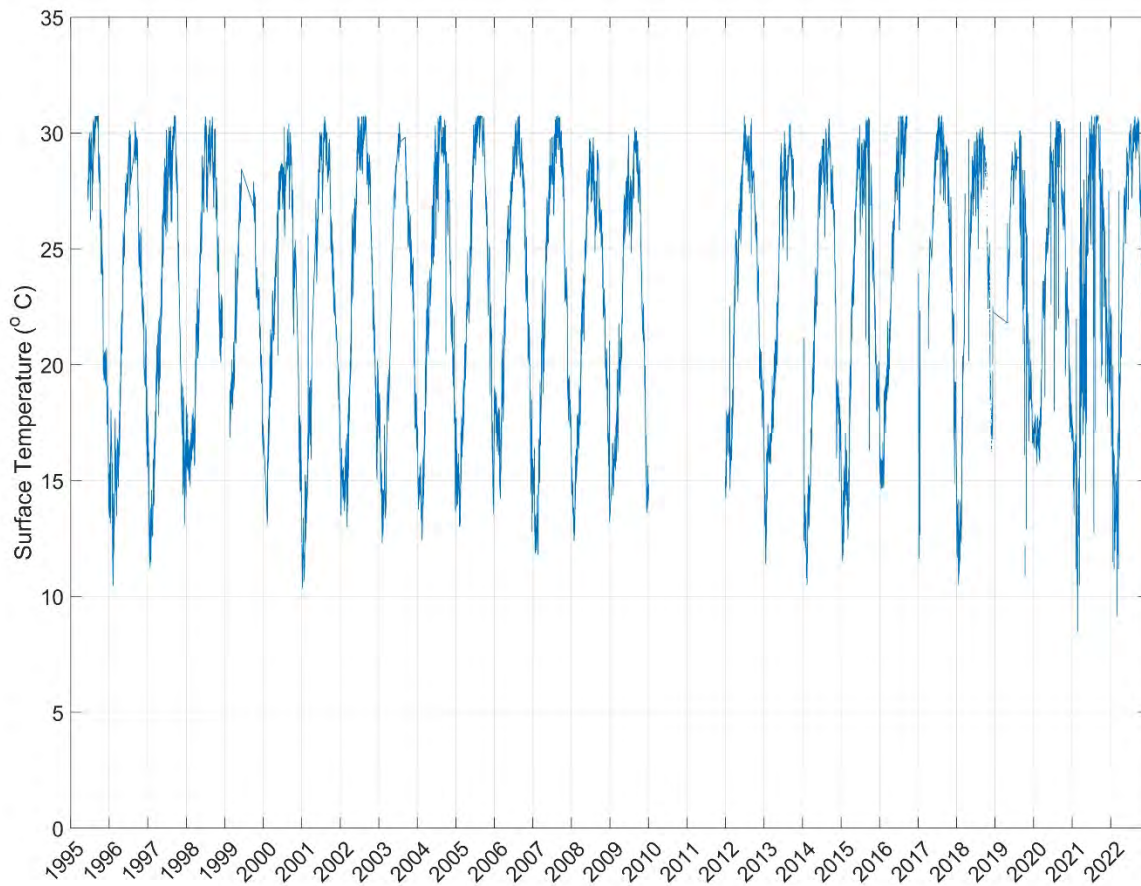


Box-chart reference guide

Notes: Data were sourced through GCOOS for TABS Buoy D. <https://tabs.gerg.tamu.edu/tglo/ven.php?buoy=D>. The data were filtered to remove outliers that fell outside of the physical ranges.

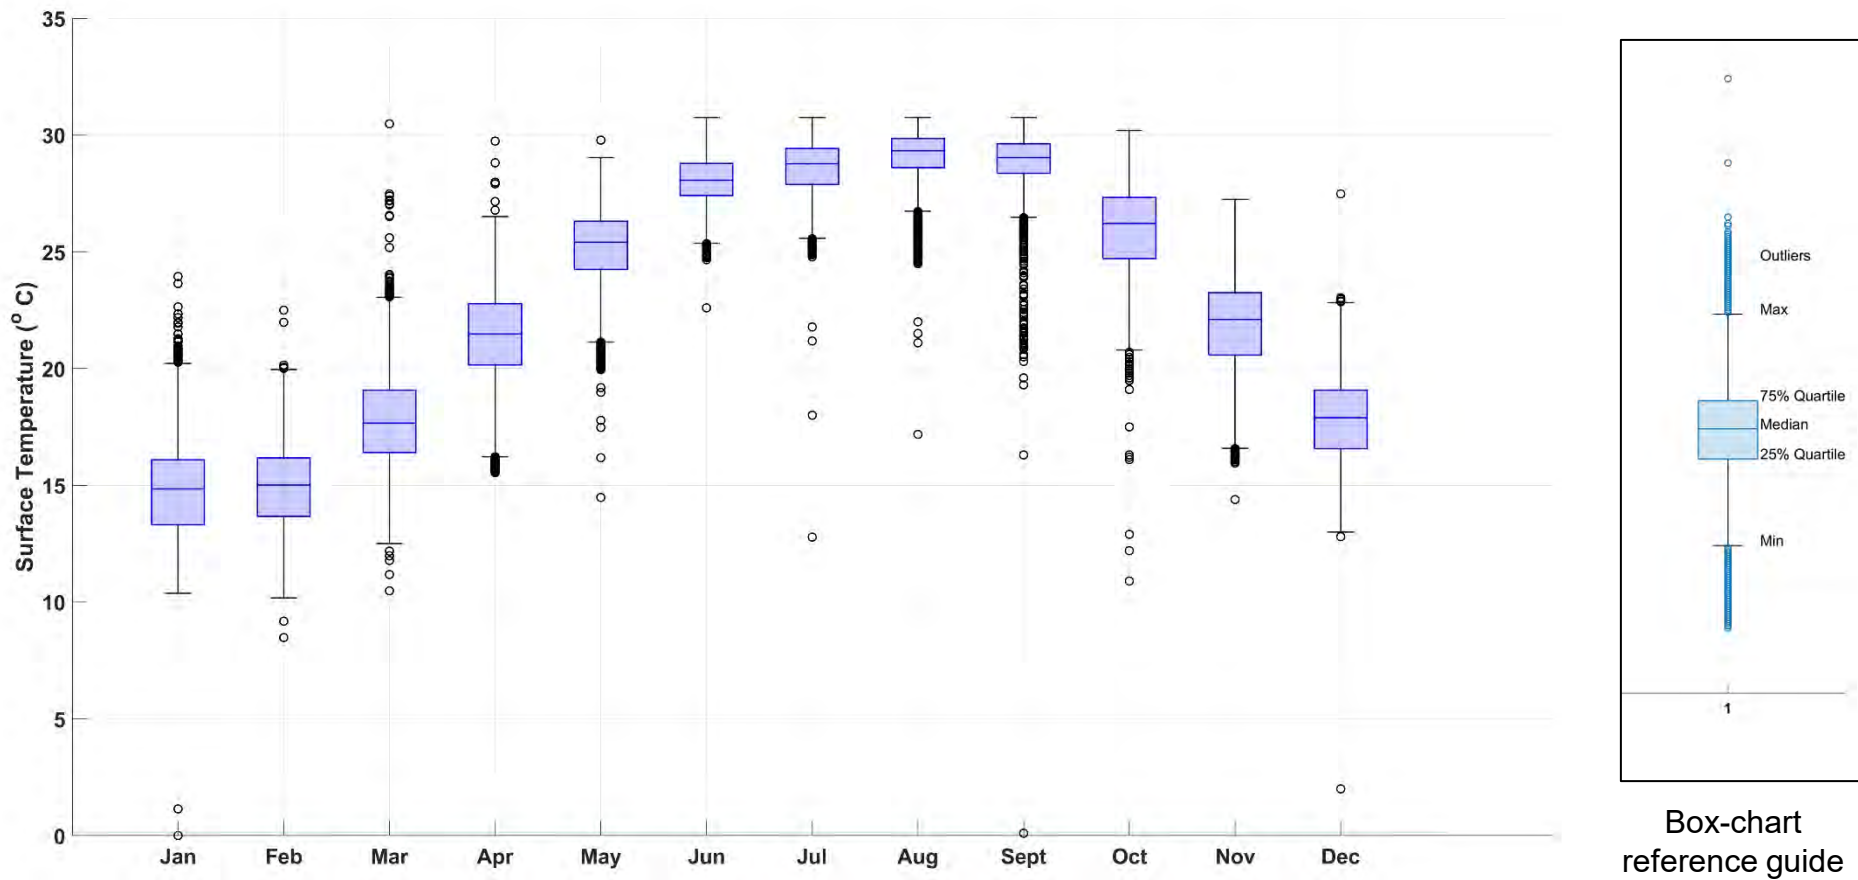


Notes: Data were sourced through GCOOS for TABS Buoy D. <https://tabs.gerg.tamu.edu/tglo/ven.php?buoy=D>. Timeseries data were filtered prior to analysis to remove outliers deemed outside physical ranges.

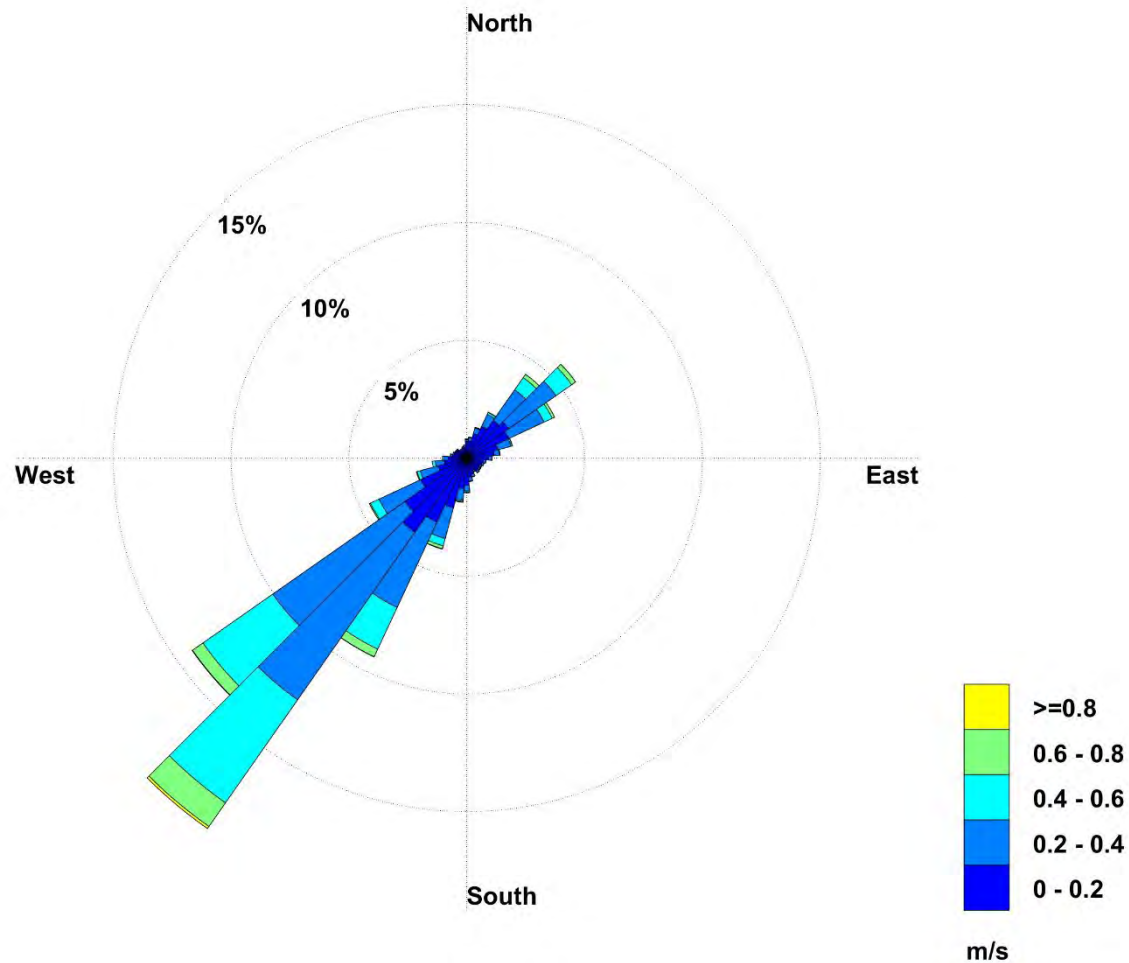


Notes: Data were sourced through GCOOS for TABS Buoy D. <https://tabs.gerg.tamu.edu/tglo/ven.php?buoy=D>. Timeseries data were filtered to remove outliers deemed outside physical ranges prior to analysis. Percentage rings represent occurrence of that directional bin. Intake velocity is a constant 0.5 ft/s (0.15 m/s).

Figure 2-9. Velocity Rose Showing Variations in the Speed, Magnitude, and Flow Direction of the Tidal Currents Measured in the Gulf of Mexico at the TABS-D Buoy over a 27-year Period

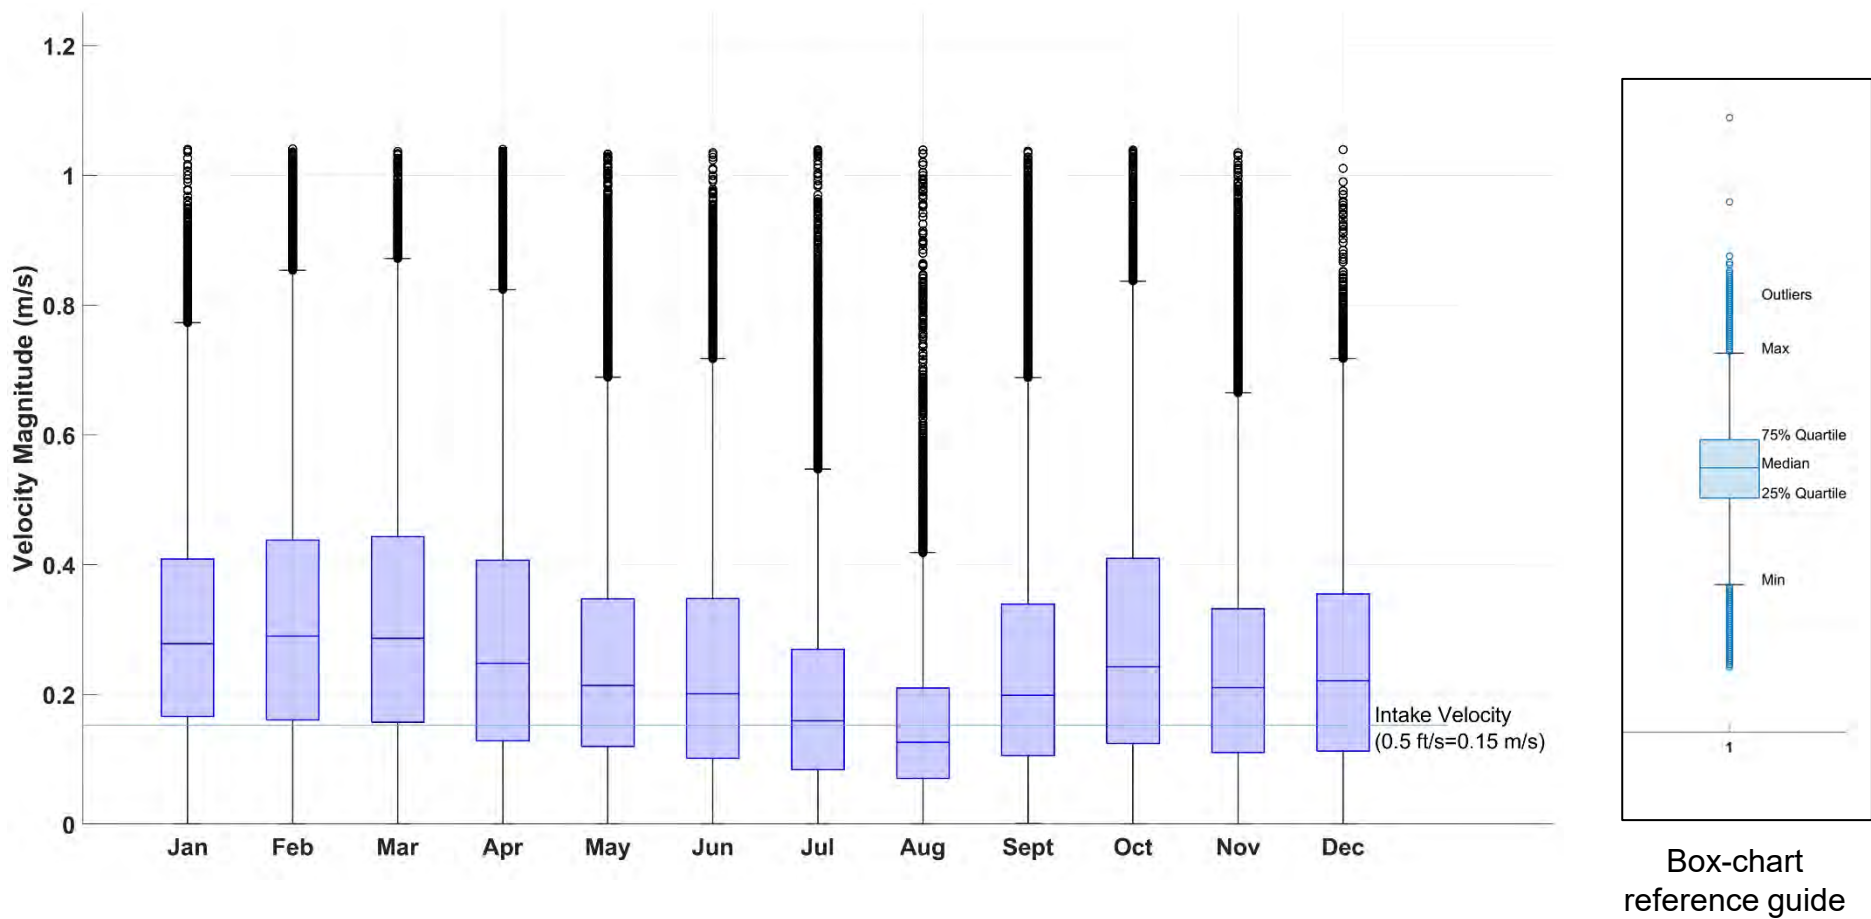


Notes: Data were sourced through GCOOS for TABS Buoy D. <https://tabs.gerg.tamu.edu/tglo/ven.php?buoy=D>. The data were filtered to remove outliers that fell outside the physical ranges. The intake velocity of 0.5 ft/s (0.15 m/s) at the velocity caps is included for comparison.

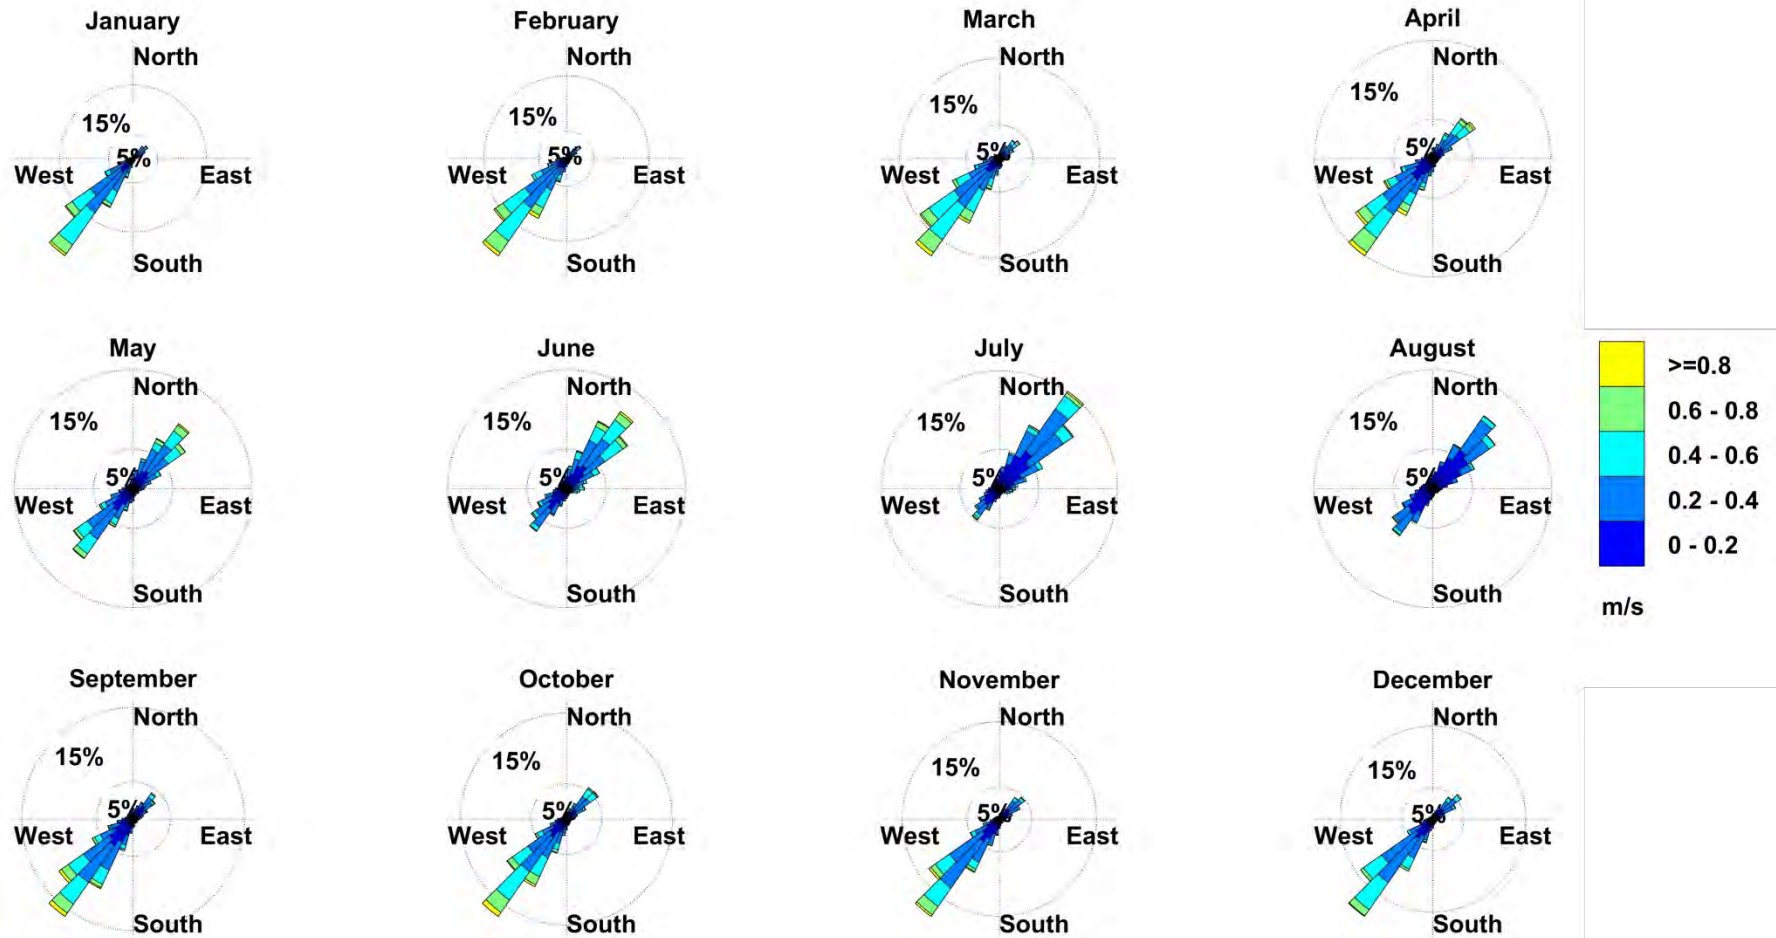

Notes: Data were sourced through GCOOS for TABS Buoy D. <https://tabs.gerg.tamu.edu/tglo/ven.php?buoy=D>. Timeseries data were filtered to remove outliers deemed outside physical ranges prior to analysis. Percentage rings represent occurrence of that directional bin. Intake velocity is a constant 0.5 ft/s (0.15 m/s).

Figure 2-11. Monthly variations in the Speed, Magnitude, and Direction of the Tidal Currents Measured in the Gulf of Mexico at the TABS-D Buoy over a 27-year period

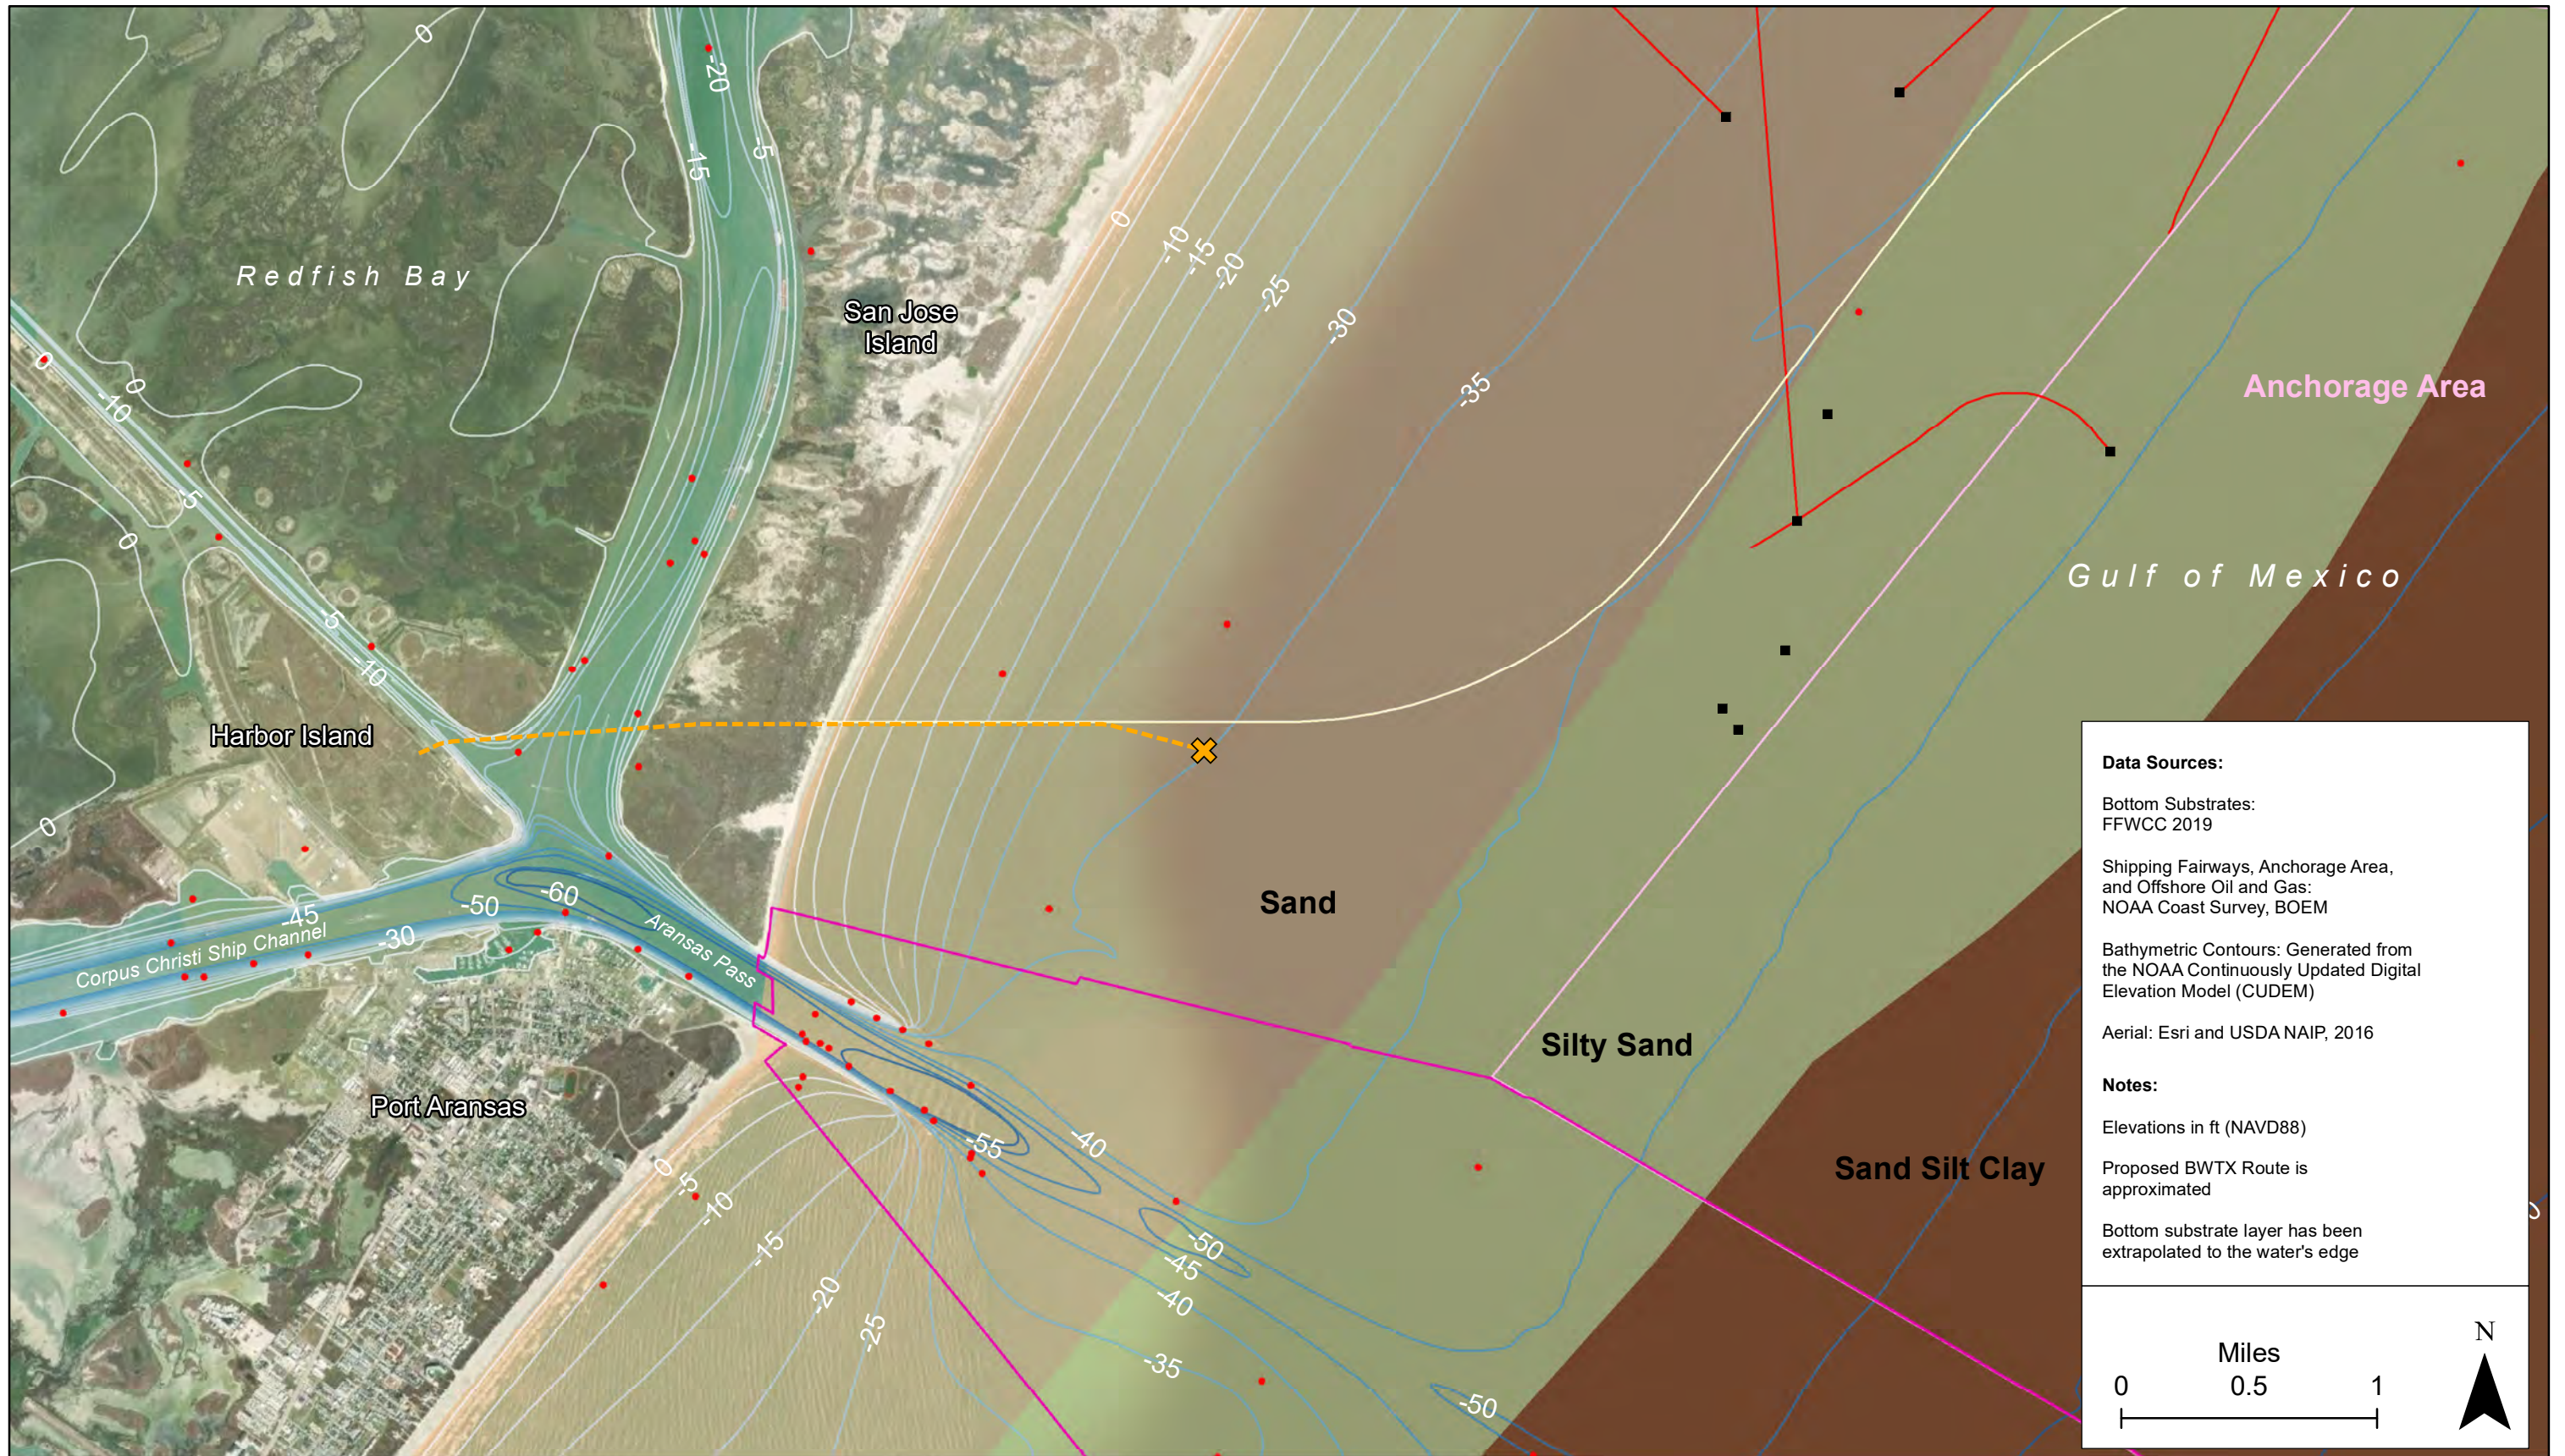

Data Sources:

Bottom Substrates:
FFWCC 2019

Shipping Fairways, Anchorage Area,
and Offshore Oil and Gas:
NOAA Coast Survey, BOEM

Bathymetric Contours: Generated from
the NOAA Continuously Updated Digital
Elevation Model (CUDEM)

Aerial: Esri and USDA NAIP, 2016

Notes:

Elevations in ft (NAVD88)

Proposed BWTX Route is
approximated


Bottom substrate layer has been
extrapolated to the water's edge

Figure 2-12
General Substrate Composition in the Gulf of Mexico Outside of the Aransas Inlet

Legend	Bottom Substrate Classification		Proposed Location of the Intake Structure Proposed Location of the Intake Tunnel	Anchorage Area Shipping Fairways	Proposed BWTX Route Offshore Oil & Gas Pipelines Wrecks and Obstructions Offshore Oil & Gas Feature
	Sand	Sand Silt Clay			
	Silty Sand				

GENERAL NOTES

1. DIMENSIONS PRESENTED FOR PRELIMINARY LAYOUT AND APPROXIMATE SIZING ONLY. NOT INTENDED FOR CONSTRUCTION.

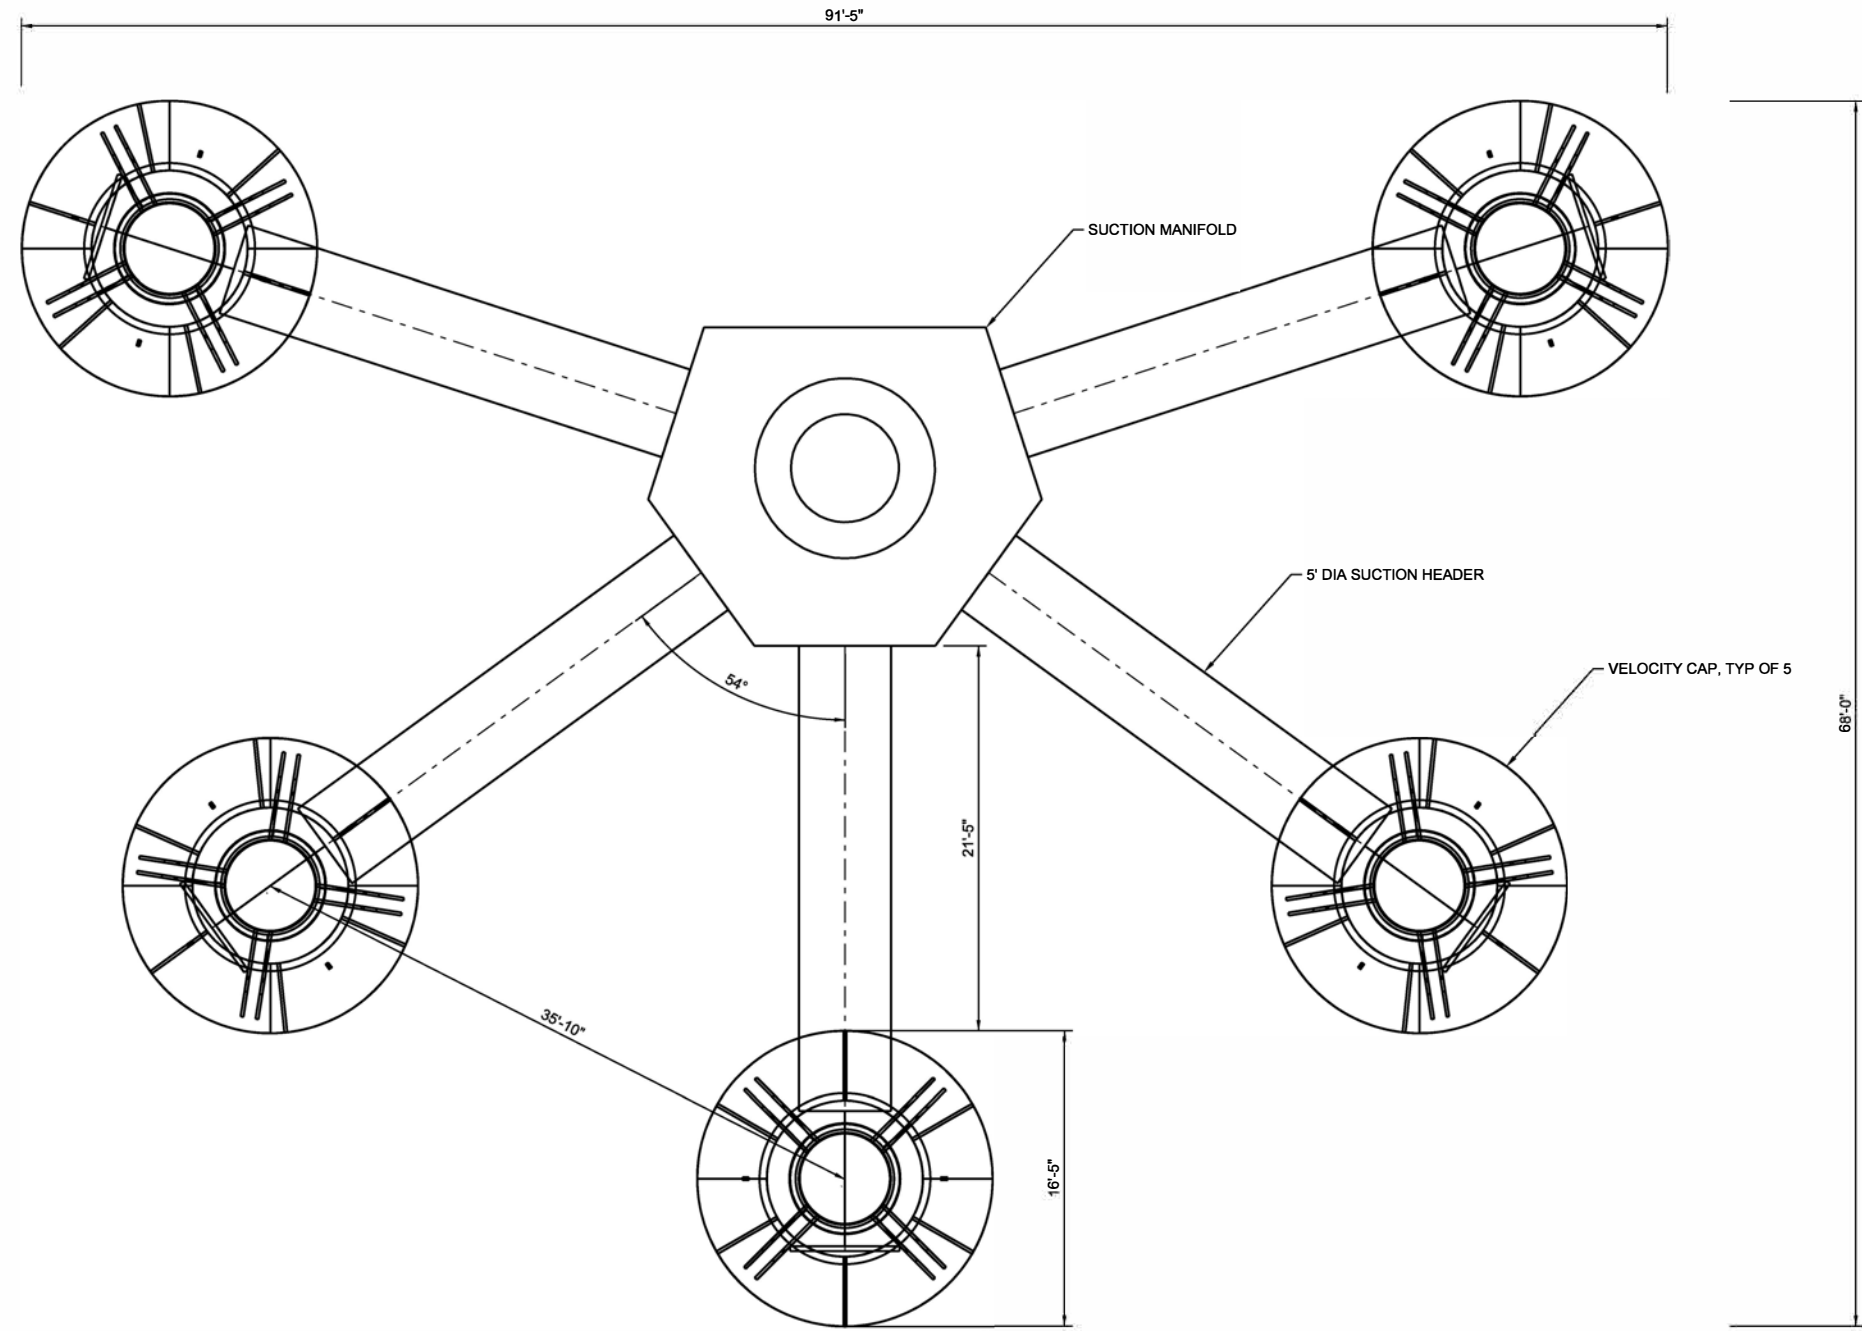

PLAN
3/16"=1'-0"

WARNING
IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS NOT TO SCALE

PW_EXT FILE PATH: R:\357 Parson\2201 POC\PROJ\3.2 CAD\3.2.1 References\3.2.1.3 Sheets\00-PERBDR - Copy.Dgn PLOT STYLE: 11x17hlf.ctb PLOTTED: 1/1/0001 12:00 AM




2000 W. Sam Houston Pkwy S.,
Suite 1400
Houston, Texas 77042
Phone: (713) 783-8700
TBPE Firm Registration No. F-4991



PORT OF CORPUS CHRISTI
 PROPOSED INTAKE FOR DESALINATION FACILITY
 BASIS OF DESIGN REPORT
 HARBOR ISLAND, CORPUS CHRISTI, TEXAS

FIGURE 3-1
INTAKE AND MANIFOLD PLAN

OCT 2022

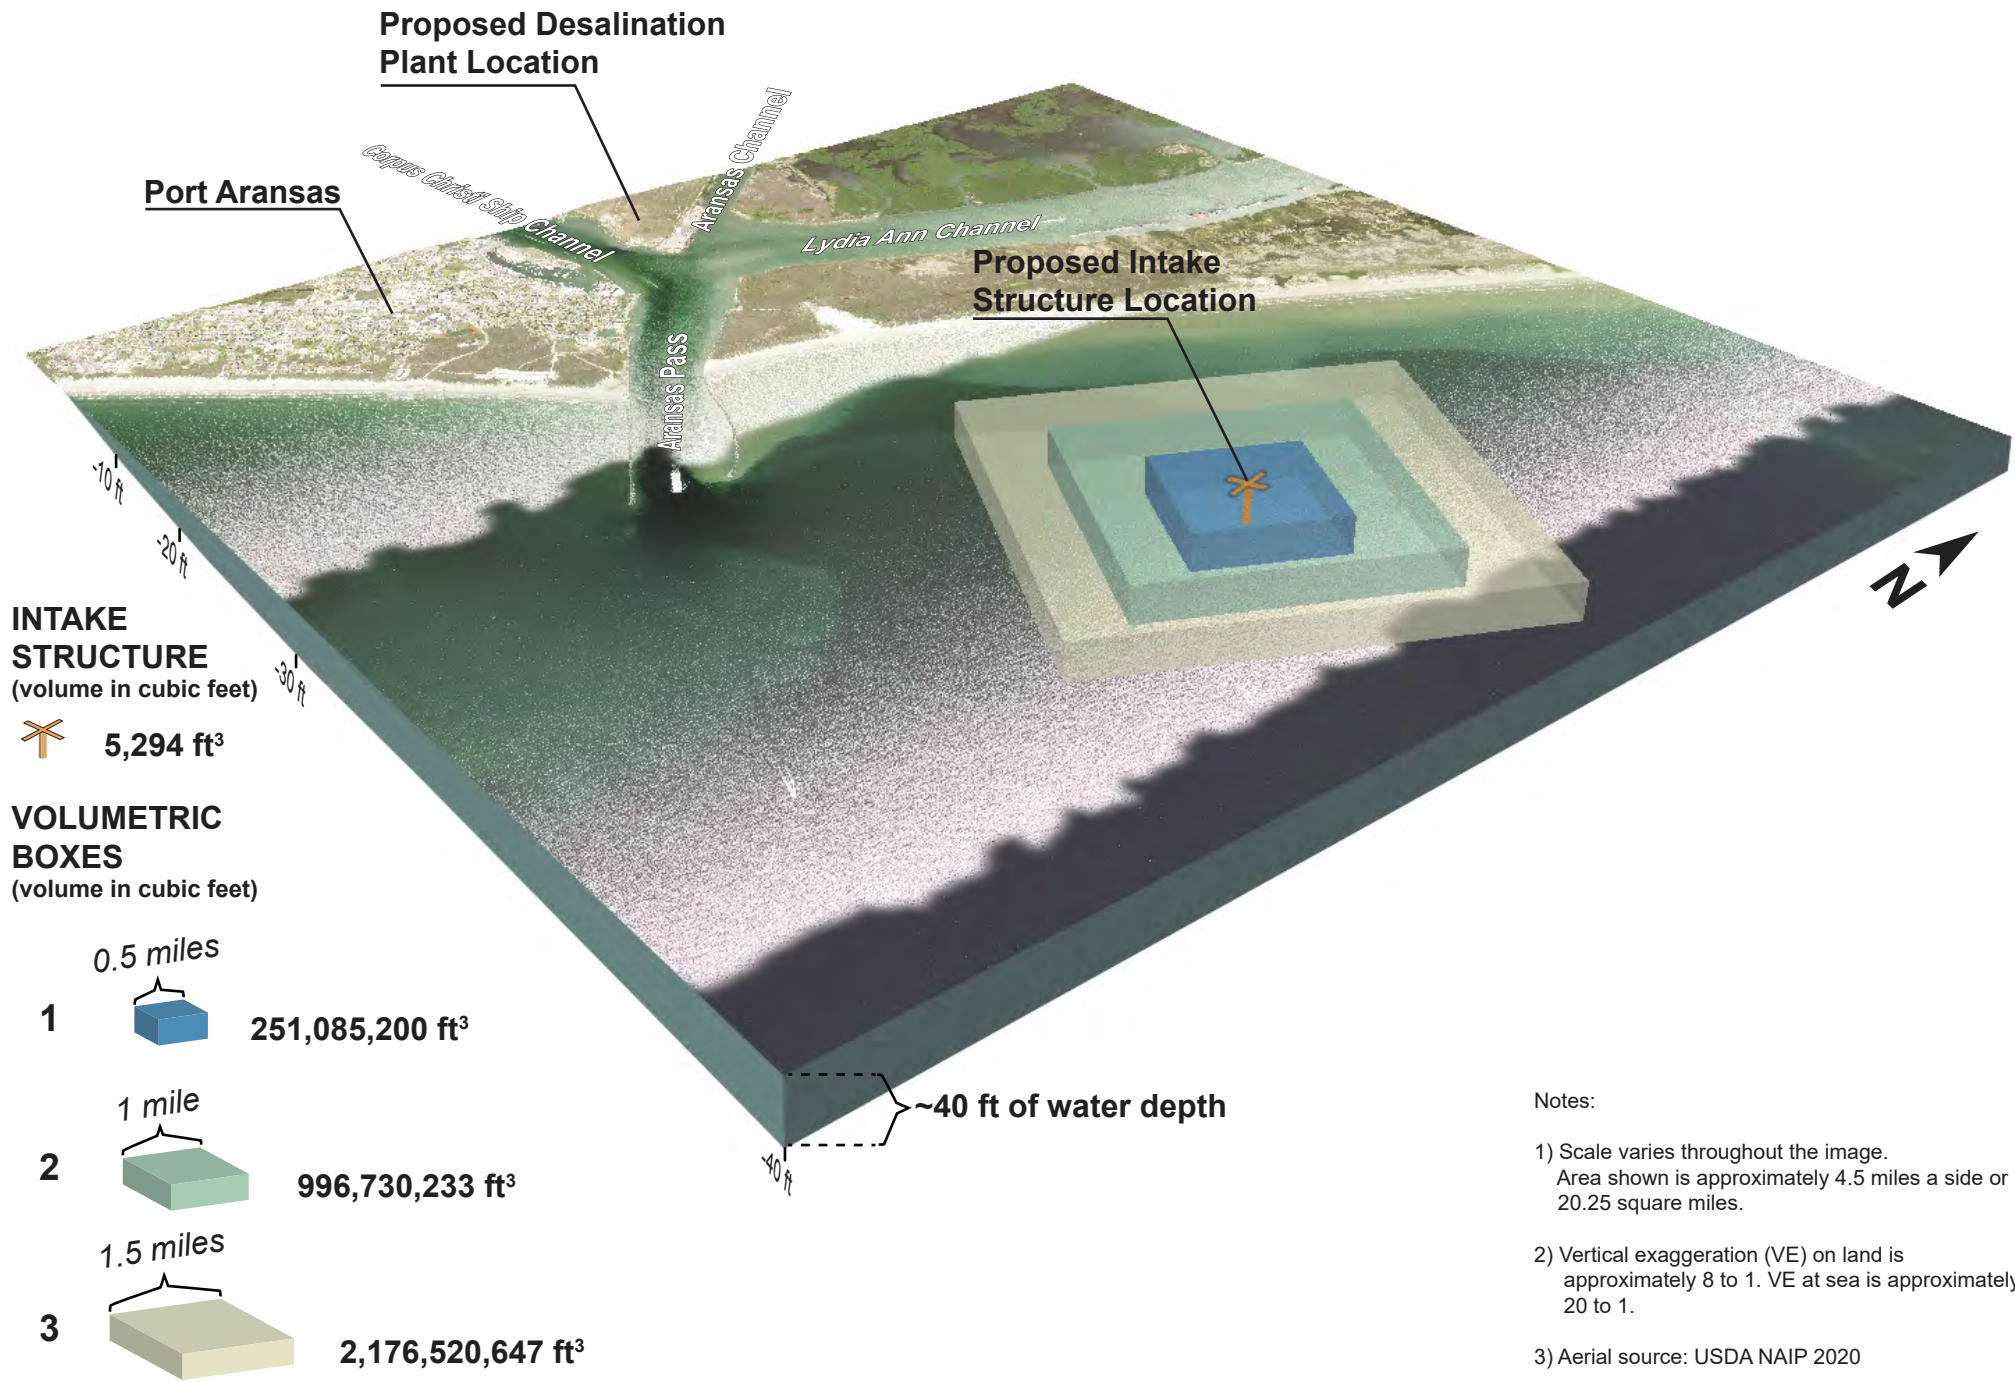

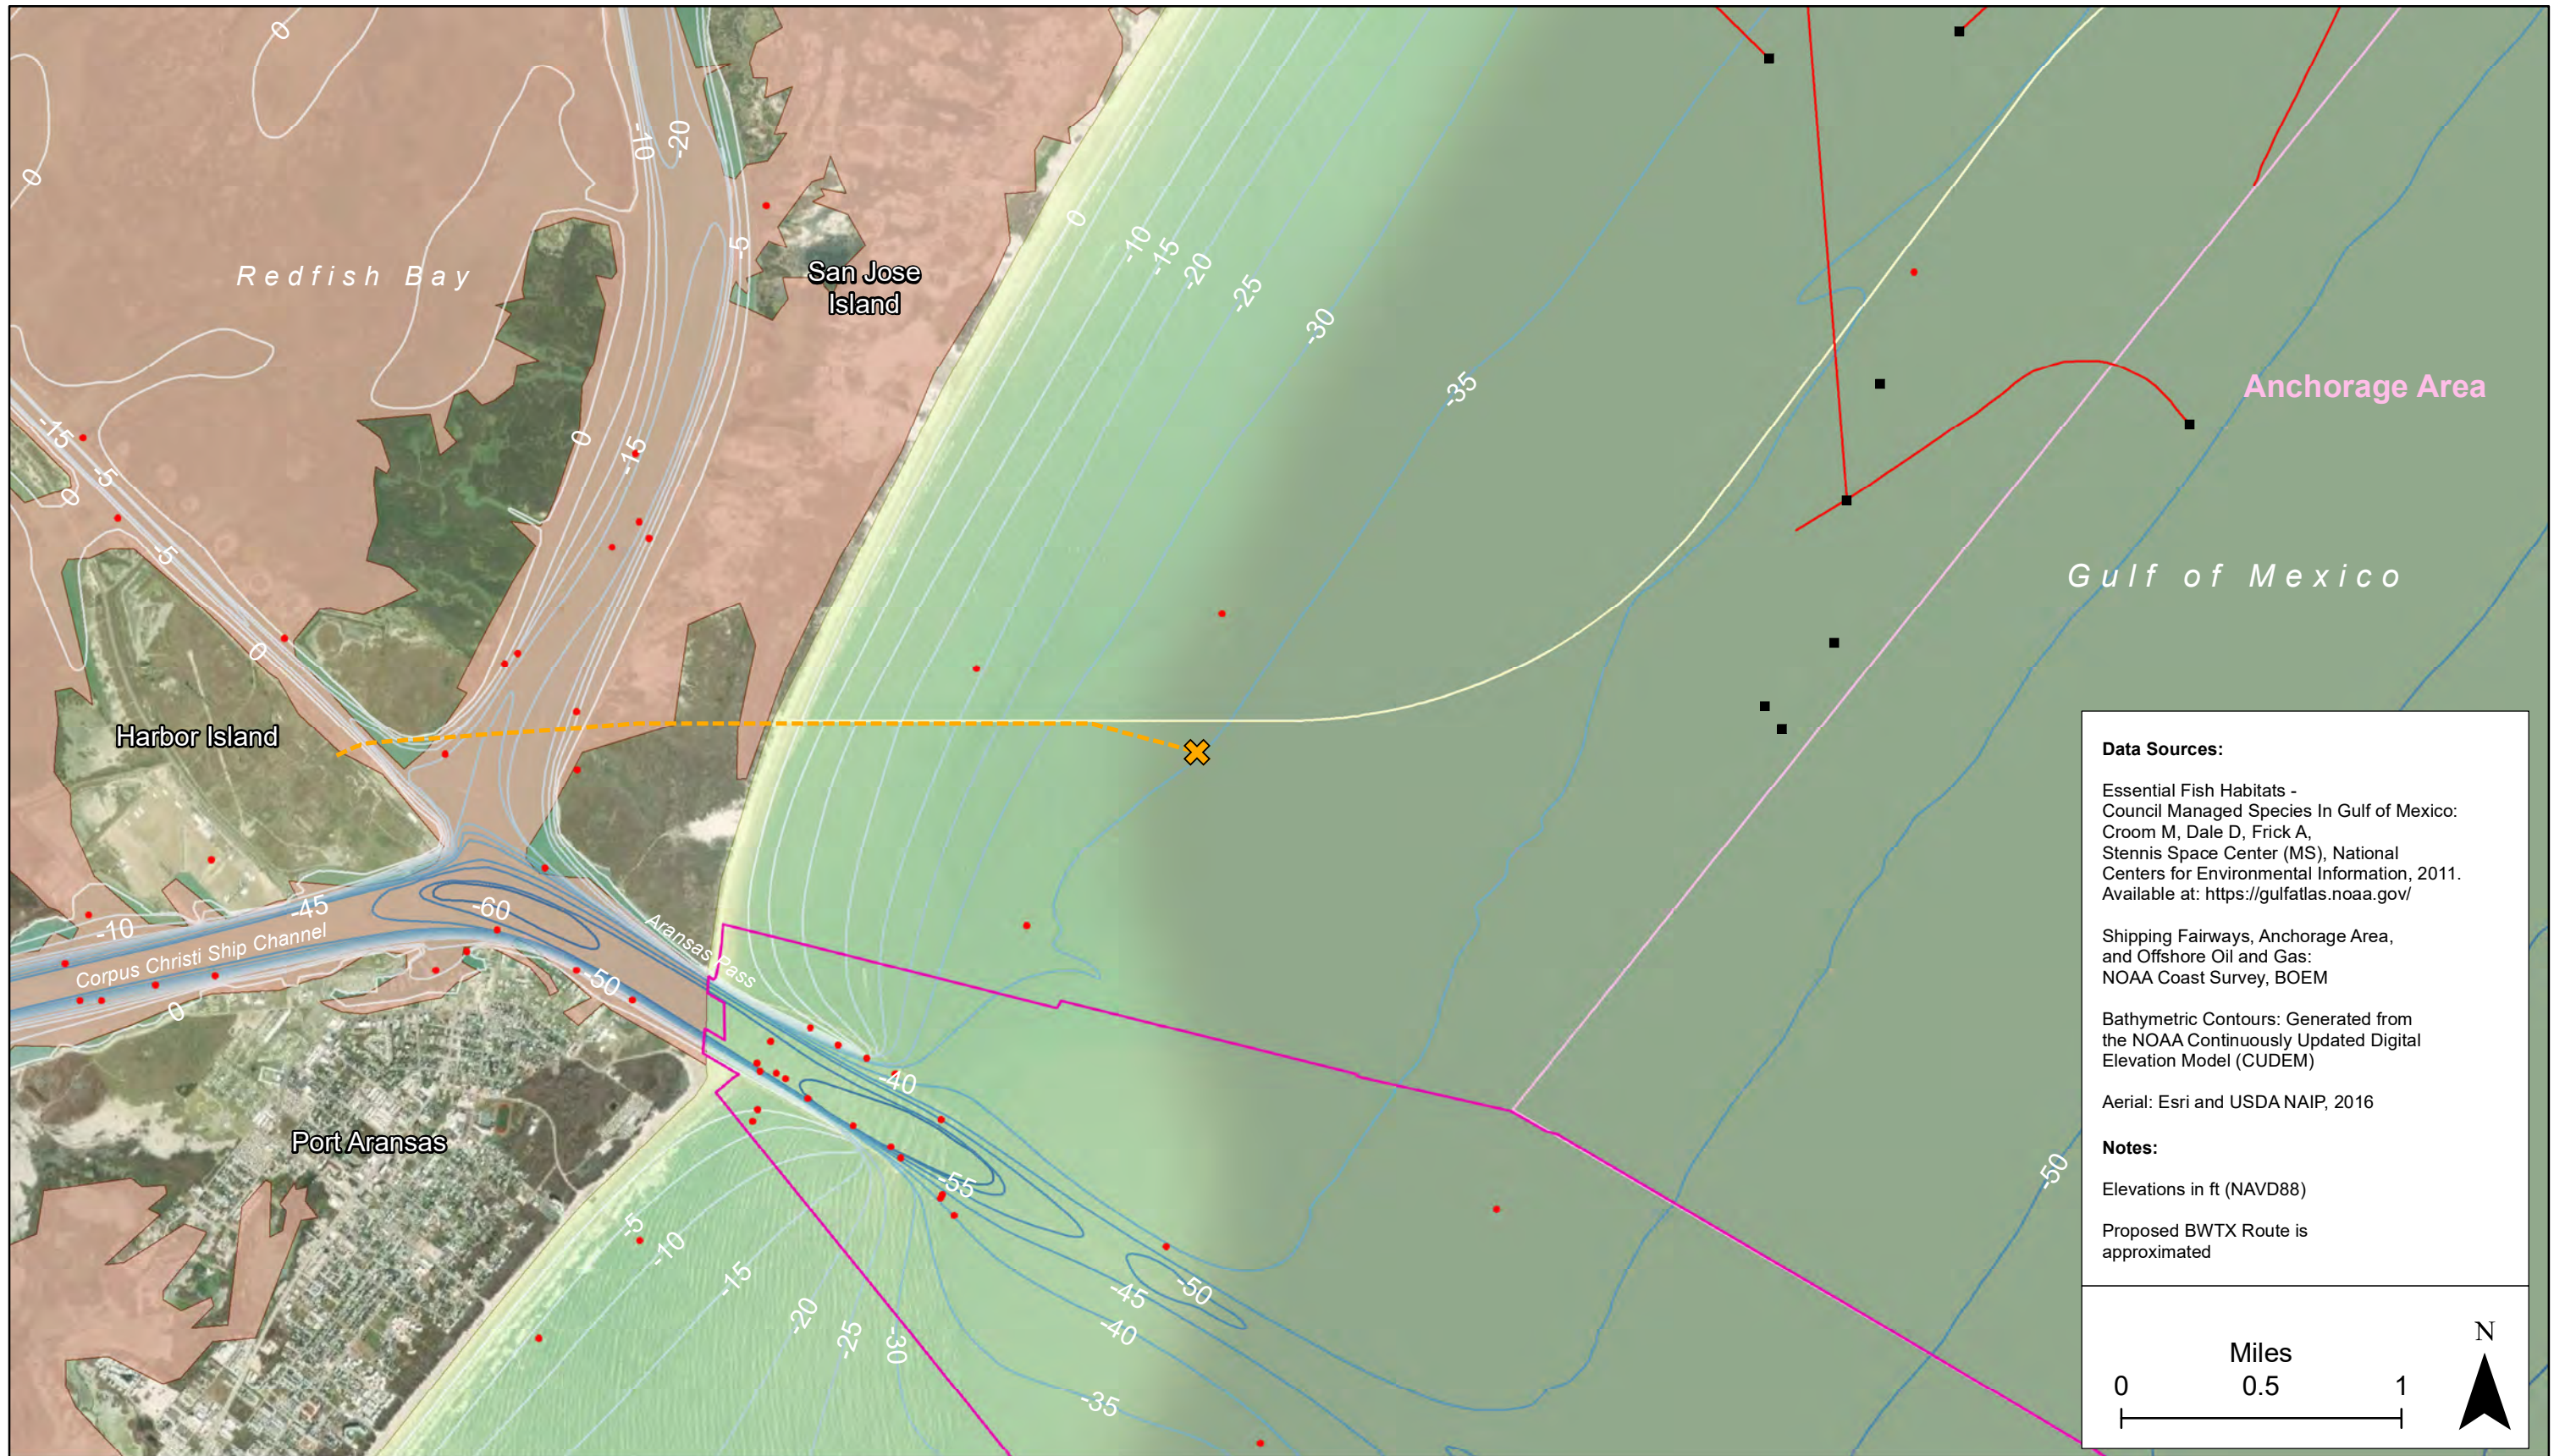
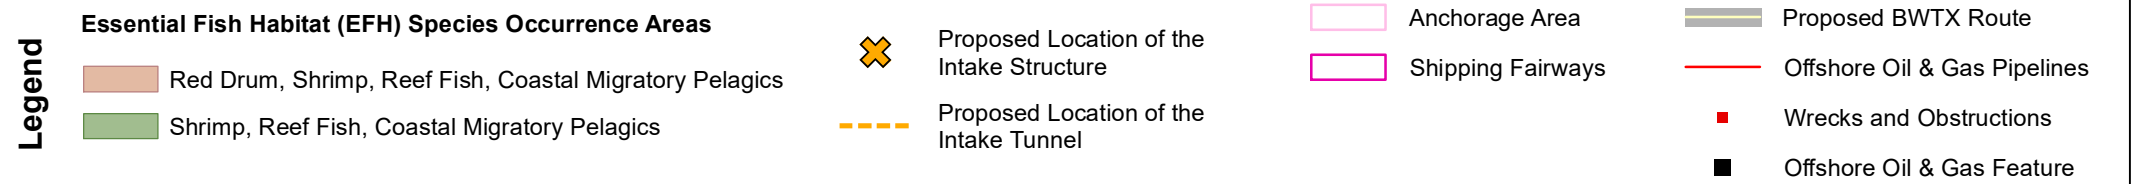


Figure 4-1

Essential Fish Habitat, Harbor Island Desalination Facility, Port Aransas, TX




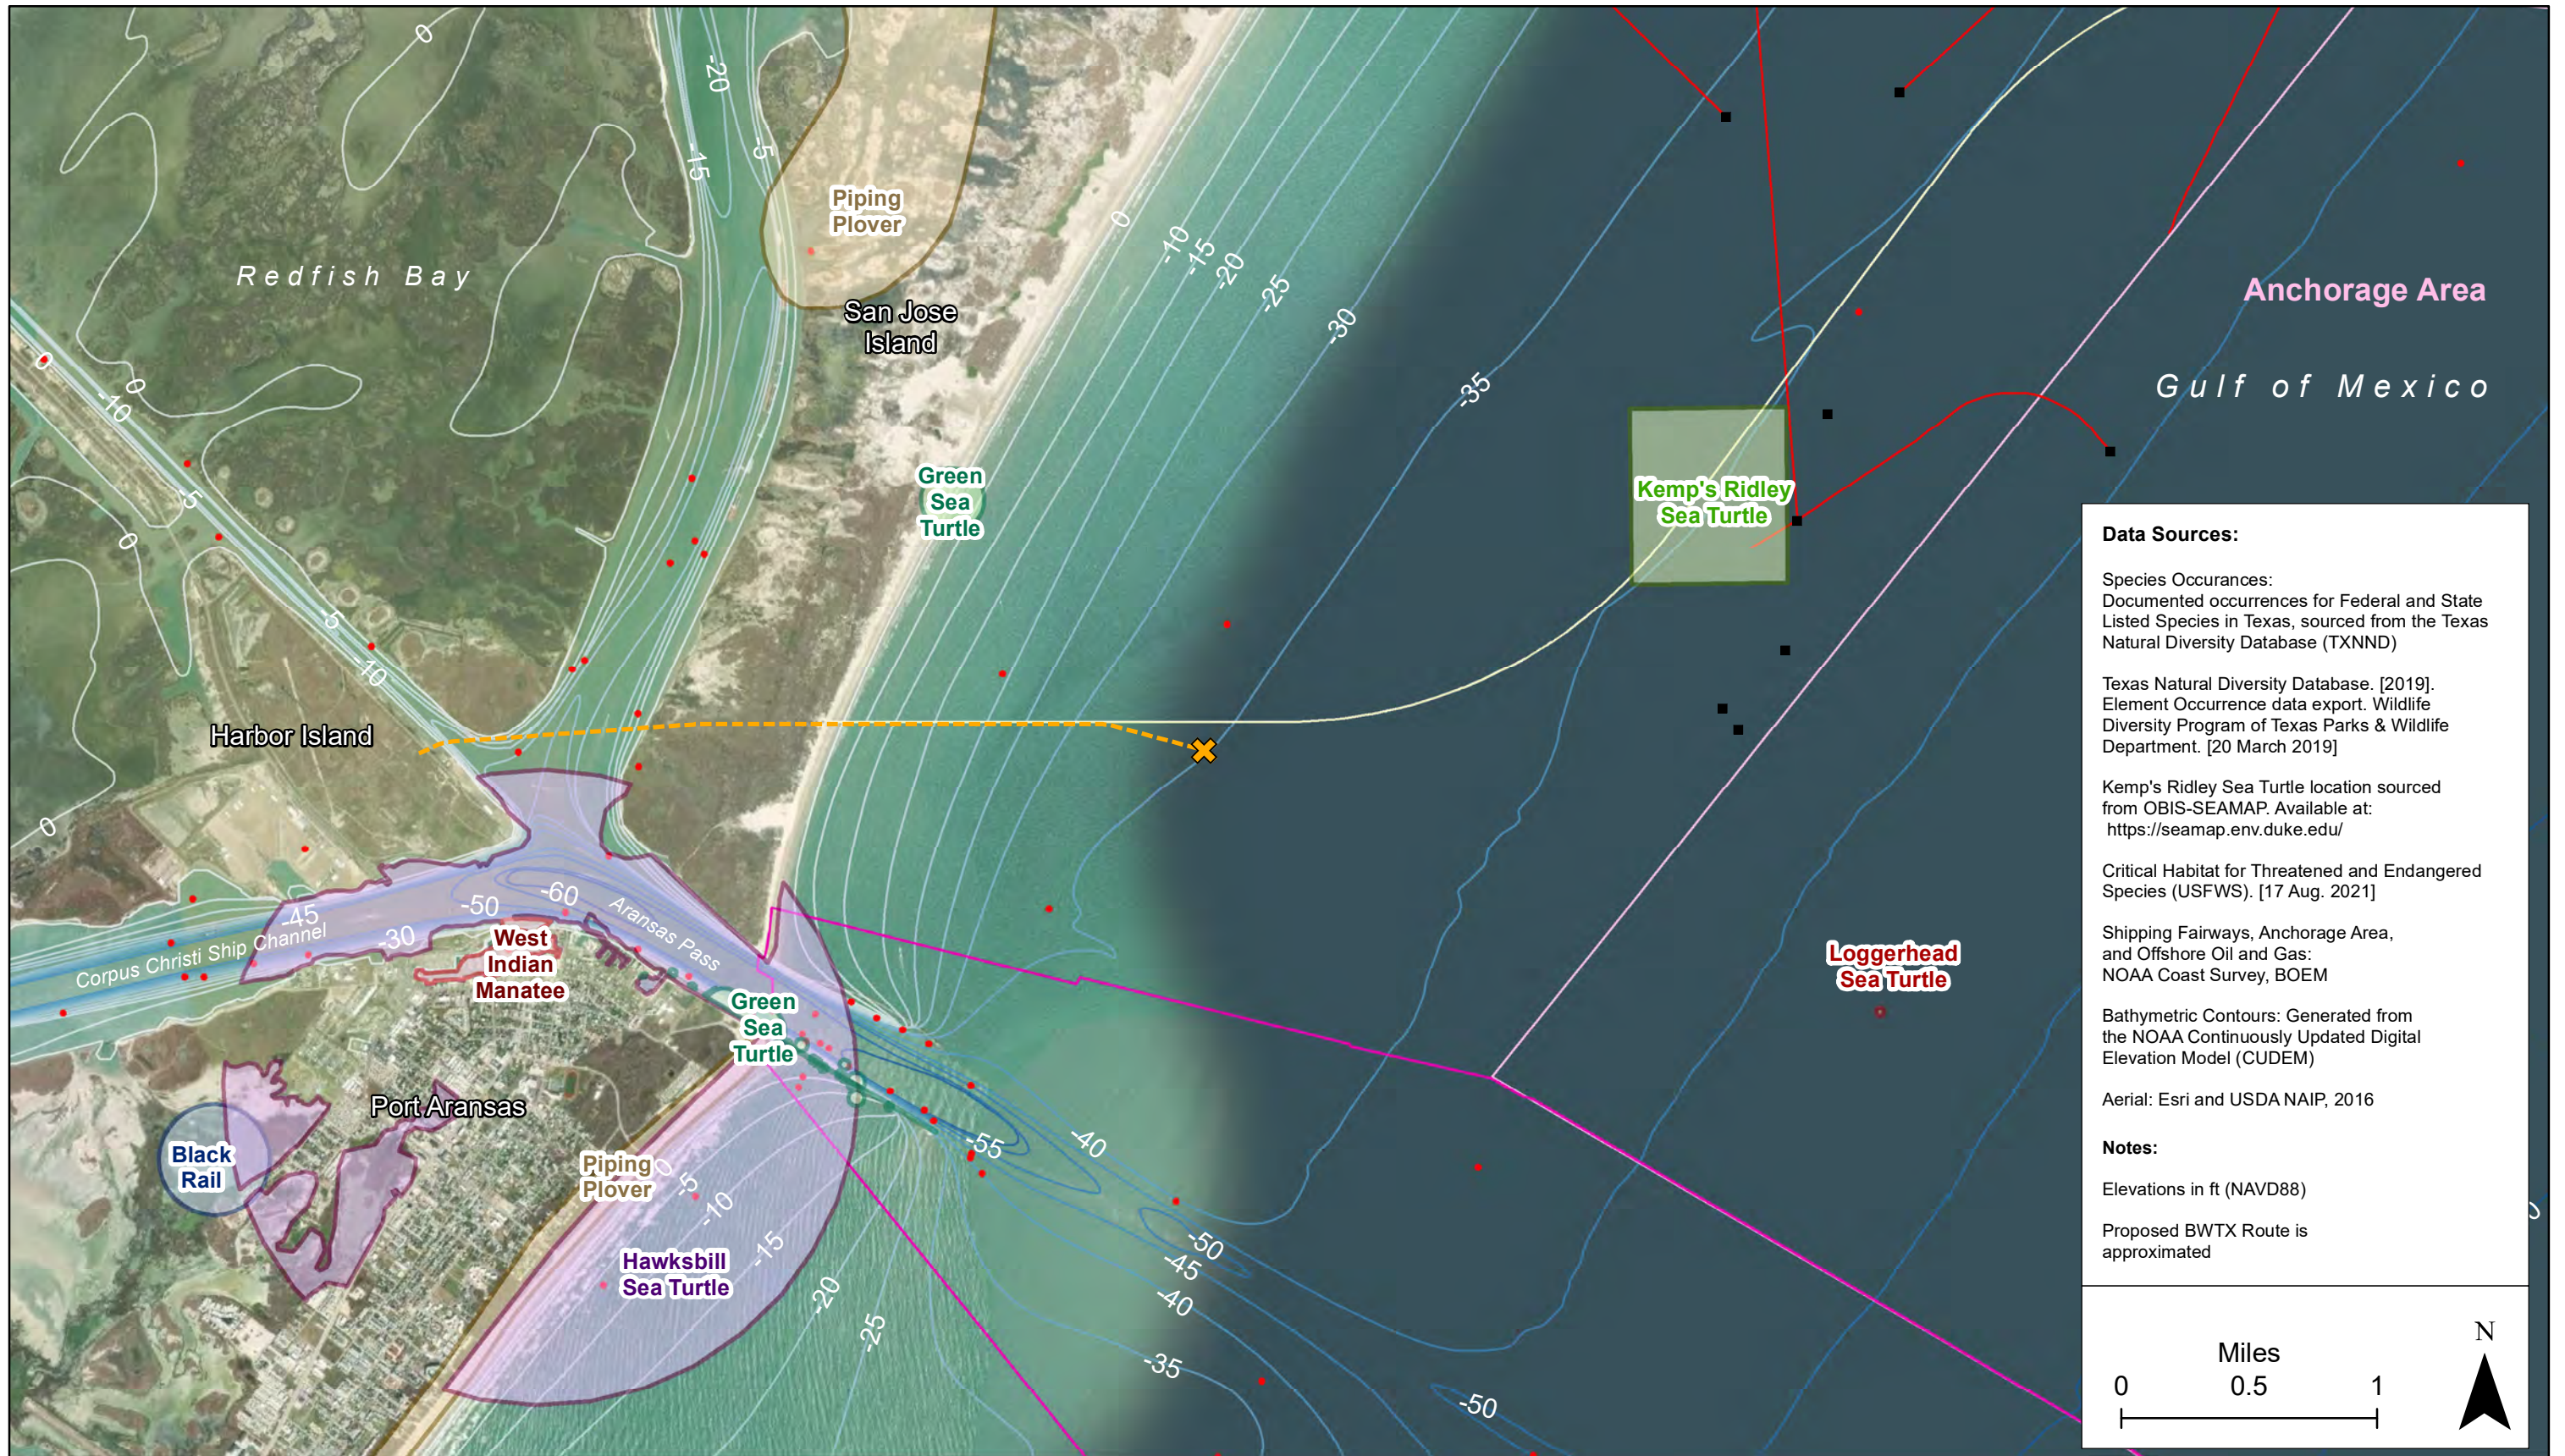


Figure 4-2
Reported Presence of Threatened and Endangered Marine Species, Harbor Island Desalination Plant, Port Aransas, TX

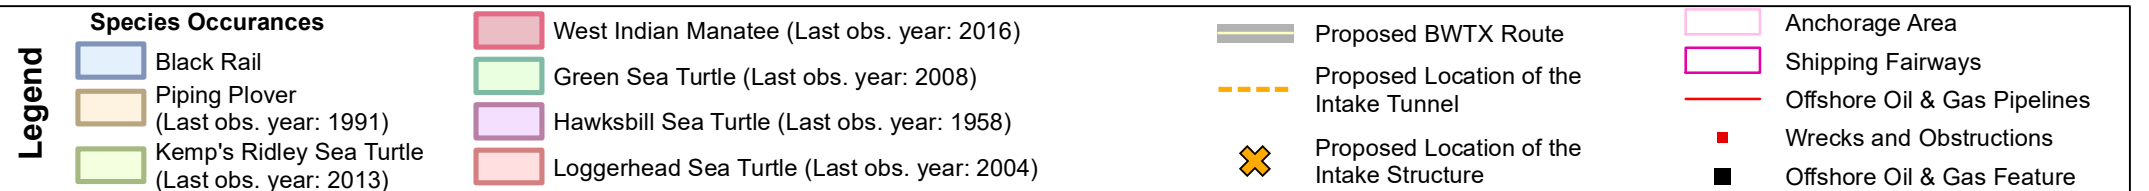

Tables

Table 3-1. Volumetric Calculations

Volumetric Box	Shape	Length (ft)	Length (mi)	Surface Area (ft ²)	Surface Area (acres)	Surface Area (mi ²)	Volume (ft ³) ^a	Volume (U.S. gal)	Volume (acre feet)	Ratio of Intake Volume	Method
	Intake structure	--	--	--	--	--	5,294	39,602	0.1	--	--
1	Square box	2,640	0.50	6,969,600	160	0.25	251,085,200	1,878,247,862	5,764.1	0.000021084	Polygon over TIN
2	Square box	5,280	1.00	27,878,400	640	1.0	996,730,233	7,456,060,441	22,881.8	0.000005311	Polygon over TIN
3	Square box	7,920	1.50	62,726,400	1,440	2.25	2,176,520,647	16,281,506,232	49,966.2	0.000002432	Polygon over TIN

Notes:

See Figure 3-2 in this report for details on location.

TIN = triangulated irregular network

^a See the report text for calculating the volume of water present in the five velocity caps of the intake structure. The estimated volume of water associated with each volumetric box was calculated in the ArcGIS software environment using the "Polygon Volume" tool of the 3D Analyst extension. The volumes represent the area enclosed within the plane of the squares, referenced at mean sea level (0.93 ft NAVD 88), and the sea bed underneath them, referenced to NOAA's continuously updated digital elevation model bathymetry.

Table 3-2. Ichthyoplankton Density Comparisons among Volumetric Boxes

Life Stage	Average Ichthyoplankton Density ^a (organisms/ft ³)	Estimated Number of Ichthyoplankton in Intake Structure and Volumetric Boxes ^b			
		Intake Structure	Volumetric Boxes		
			1	2	3
Eggs	0.1388	7.35E+02	3.49E+07	1.38E+08	3.02E+08
Larvae	0.2152	1.14E+03	5.40E+07	2.14E+08	4.68E+08

Notes:

^a Bluewater Texas Terminals LLC. 2021. Appendix U: Ichthyoplankton Assessment, Volume II: Environmental Evaluation. Available at: https://downloads.regulations.gov/MARAD-2019-0094-0004/attachment_41.pdf

^b See Figure 3-2 in this report.

Example calculation for eggs in the intake structure: volume = 5,294 ft³; estimated number of eggs = 5,294 ft³ X 0.1388 eggs/ft³ = 735 eggs

Table 4-1. Managed Fish Species in the Vicinity of the Project Area by Life Stage

Scientific Name	Common Name	Life Stage				
		Eggs	Larvae	Juveniles	Adults	Spawning Adults
Shrimp						
<i>Farfantepenaeus aztecus</i>	Brown shrimp	--	X	X	--	--
<i>Farfantepenaeus duorarum</i>	Pink shrimp	X	X	X	X	X
<i>Litopenaeus setiferus</i>	White shrimp	X	X	X	X	X
Red Drum						
<i>Sciaenops ocellatus</i>	Red drum	--	X	X	X	--
Reef Fish						
<i>Balistes capriscus</i>	Gray triggerfish	X	X	X	X	X
<i>Epinephelus itajara</i>	Goliath grouper	--	--	X	X	X
<i>Hyporthodus flavolimbatus</i>	Yellowedge grouper	--	--	X	--	--
<i>Lutjanus campechanus</i>	Red snapper	--	--	--	X	--
<i>Lutjanus griseus</i>	Gray (mangrove) snapper	--	--	--	X	X
<i>Lutjanus synagris</i>	Lane snapper	X	X	X	X	X
<i>Mycteroperca microlepis</i>	Gag	--	--	--	X	--
<i>Seriola dumerili</i>	Greater amberjack	X	X	X	X	X
<i>Seriola fasciata</i>	Lesser amberjack	X	X	--	--	--
<i>Seriola rivoliana</i>	Almaco jack	X	X	X	X	X
Coastal Migratory Pelagic Fishes						
<i>Scomberomorus cavalla</i>	King mackerel	--	--	X	X	--
<i>Scomberomorus maculatus</i>	Spanish mackerel	--	X	--	--	--
<i>Rachycentron canadum</i>	Cobia	X	X	X	X	X

Source:

GMFMC (2016)

Notes:

The proposed project area is approximately 1.5 miles from the Aransas Inlet Jetty, Texas, in approximately 35 ft (10.7 m) of water. This area corresponds to GMFMC nearshore habitat in Ecoregion 5.

This list includes all the GMFMC-managed species for which at least one life stage occurs in GMFMC Ecoregion 5 and that are known to reside in water depths shallower than the 55 ft (17 m).

GMFMC = Gulf of Mexico Fishery Management Council

-- = the species is not identified as occurring in Ecoregion 5 for the indicated life stage

x = the species is identified as occurring in Ecoregion 5 for the indicated life stage

Table 4-2. Highly Migratory Fish Species in the Vicinity of the Project Area by Life Stage

Common Name	Scientific Name	Spawning/ Eggs/ Larvae ^a	Neonates ^a	Juveniles	Adults
Sailfish	<i>Istiophorus platypterus</i>	--	N/A	x	x
Scalloped hammerhead shark	<i>Sphyrna lewini</i>	N/A	x	--	--
Blacktip shark	<i>Carcharhinus limbatus</i>	N/A	x	x	x
Bull shark	<i>Carcharhinus leucas</i>	N/A	--	x	x
Lemon shark	<i>Negaprion brevirostris</i>	N/A	x	x	--
Spinner shark	<i>Carcharhinus brevipinna</i>	N/A	x	x	x
Bonnethead shark	<i>Sphyrna tiburo</i>	N/A	x	x	x
Atlantic sharpnose shark	<i>Rhizoprionodon terraenovae</i>	N/A	x	x	x
Blacknose shark	<i>Carcharhinus acronotus</i>	N/A	--	x	x
Finetooth shark	<i>Carcharhinus isodon</i>	N/A	x	x	x

Sources:

NMFS (2017)

NOAA Essential Fish Habitat (EFH) Mapper. www.habitat.noaa.gov/apps/efhmapper. Accessed September 2022.

Notes:

The proposed project area is approximately 1.5 miles from the Aransas Inlet Jetty in approximately 35 ft (10.7 m) of water.

The list shows species managed by the Consolidated Atlantic Highly Migratory Species Fishery Management Plan, and known to occur within the project area.

-- = the species is not identified as occurring in the project area for the indicated life stage

X = the species is identified as occurring in the project area for the indicated life stage

N/A = data are not available for the species at the indicated life stage

^a The earliest life stages for the sailfish, a type of billfish, are eggs and larvae; the earliest life stage for most sharks is the fully-formed newborn pup.

Table 4-3. Threatened and Endangered Marine Species that May Occur in the Vicinity of the Project Area

Scientific Name	Common Name	Federal Status	State Status	Source ^a	Range & Habitat Requirements ^b	Potential of Occurrence in Project Area ^b	Potential for I&E
Fish							
<i>Acipenser oxyrinchus desotoi</i>	Gulf sturgeon	T, Protected Fish		NOAA	Historically, this species occurred from the Mississippi River east to Tampa Bay. Sporadic occurrences were recorded as far west as the Rio Grande River in Texas and Mexico, and to Florida Bay in the east. Their present range extends from Lake Pontchartrain and the Pearl River system in Louisiana and Mississippi, respectively, east to the Suwannee River in Florida. Based on current data, populations continue to reproduce in seven river systems (Pearl, Pascagoula, Escambia, Yellow/Blackwater, Choctawhatchee, Apalachicola, and Suwannee rivers). In addition to the seven spawning riverine populations, Gulf sturgeon are also known to inhabit the Mobile and Ochlocknee rivers (NOAA 2022).	The gulf sturgeon is not likely to occur in the project area because its range is farther east. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in the project area.
<i>Carcharhinus longimanus</i>	Oceanic whitetip shark	T, Protected Fish	T	TPWD, NOAA	This pelagic species lives throughout tropical and sub-tropical waters. It generally prefers offshore habitats in the open ocean along the outer continental shelf or near ocean islands in waters with depths above 600 ft (182.9 m; NOAA 2022). The oceanic whitetip shark is protected throughout its range.	The location of the proposed water intake structure is at a depth of about 35 ft, which is not the preferred depth for the oceanic whitetip shark. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species lacks a larval phase (young are born fully formed), and pups measure between 55 and 77 cm (21.7 and 30.3 in.) at birth. Pups are too large to fit through 3-inch mesh bar screens.
<i>Epinephelus striatus</i>	Nassau grouper	T, Protected Fish		NOAA	This species is found in tropical and subtropical waters of the western North Atlantic. The Nassau grouper is considered a reef fish, but it transitions as it grows through a series of shifts in both habitat and diet. The larvae are planktonic. The juveniles are found in nearshore shallow waters in macroalgal and seagrass habitats, and shift deeper as they grow, to predominantly reef habitat (forereef and reef crest) (NOAA 2022).	The Nassau grouper does not occur in this region. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in the project area.
<i>Isurus oxyrinchus</i>	Shortfin mako shark	Candidate	T	TPWD	This pelagic, fast-swimming species is found in tropical and temperate waters circumglobally. Mako sharks use a variety of habitats during their long-distance migrations, including open-ocean and more shallow waters along the continental shelf. Although rare, recreational anglers have reported catching large, mature mako sharks from shore (Gibson et al 2021).	The shortfin mako shark may occur in the project area because it has been caught recreationally in inshore areas. However, this species is highly mobile and its preferred habitat is much further off-shore.	No potential for I&E. This species lacks a larval phase (young are born fully formed), and pups measure between 70 and 80 cm (27.6 and 31.5 in.) at birth. Pups are too large to fit through 3-inch mesh bar screens.
<i>Manta birostris</i>	Giant manta ray	T, Protected Fish		NOAA	This species is a migratory pelagic species that prefers sparse, highly-fragmented habitats within tropical, sub-tropical, and temperate marine waters. Populations within the GOM are small and sparsely distributed; however, a population of this species occurs within the Flower Garden Banks National Marine Sanctuary, located 100 nautical miles offshore of Galveston, Texas, in the northwestern GOM. These filter feeders are known to occur near the Yucatan Peninsula as well as other areas of the GOM (NOAA 2022). This species is protected throughout its range.	A known population of this species lives within the GOM and could transit through the area of the proposed water intake structure. However, given the distance of known populations of this species from Port Aransas and their general habitat preferences, it is unlikely that they would be impacted by the proposed project. The Texas Natural Diversity Database does not record the presence of giant manta rays in the project area (TXNDD 2019).	No potential for I&E. This species lacks a larval phase (young are born fully formed), and newborn pups have wingspans measuring between 91 and 183 cm (36 and 72 in.) Pups are too large to fit through 3-inch mesh bar screens.
<i>Pristis pectinata</i>	Smalltooth sawfish	E, Protected Fish		NOAA	The entire U.S. population of smalltooth sawfish is protected. These fish live in tropical seas and estuaries, feeding on a variety of fish and invertebrates such as shrimp and crabs. This species historically occurred in the Gulf Coast from Texas to Florida, but is now only found near Florida. It is extirpated from the Texas coast due to habitat loss and accidental captures (NOAA 2022).	The smalltooth sawfish does not occur in the project area. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in the project area.
<i>Pristis pristis</i>	Largetooth sawfish	E, Protected Fish		NOAA	This species was historically found in tropical and subtropical waters of all the oceans around the globe. However, they are now considered extirpated or extremely rare in portions of their former range (NOAA 2022).	The largetooth sawfish is considered extirpated from the region. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.

Table 4-3. Threatened and Endangered Marine Species that May Occur in the Vicinity of the Project Area

Scientific Name	Common Name	Federal Status	State Status	Source ^a	Range & Habitat Requirements ^b	Potential of Occurrence in Project Area ^b	Potential for I&E
Mammals							
<i>Balaenoptera borealis</i>	Sei whale	E	E	IPaC, NOAA, TPWD	This species has a wide distribution and lives in subtropical, temperate, and subpolar waters around the world. These whales prefer temperate waters in the mid-latitudes, and can be found in the Atlantic, Indian, and Pacific Oceans. During the summer, they are commonly found in the Gulf of Maine, and on Georges Bank and Stellwagen Bank off the U.S. coast in the western North Atlantic. The movement patterns of sei whales are not well known, but they are typically observed in deeper waters far from the coastline (NOAA 2022).	The sei whale is unlikely to occur in the project area because of habitat limitations. This species prefers deeper habitats. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Balaenoptera musculus</i>	Blue whale	E	E	IPaC, NOAA, TPWD	This species inhabits tropical, subtropical, temperate, and subpolar waters worldwide, but is infrequently sighted in the GOM. The whales migrate seasonally between summer feeding grounds and winter breeding grounds, but specifics vary. They are commonly observed at the surface in open ocean (Schmidly and Bradley 2016; NOAA 2022).	The blue whale is unlikely to occur in the project area because of the shallow water depth. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Balaenoptera ricei</i> ^c	Rice's whale ^c	E	E	IPaC, NOAA, TPWD	The historical distribution of this species may have once encompassed the northern and southern GOM. For the past 25 years, Rice's whales in U.S. waters of the GOM have been consistently located in the northeastern GOM along the continental shelf between roughly 100 and 400 m depth. A single Rice's whale was observed in the western GOM off the coast of Texas, suggesting that their distribution may occasionally include waters elsewhere in the GOM (Schmidly and Bradley 2016; NOAA 2022).	The Bryde's whale is unlikely to occur in the project area because of habitat limitations. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Eubalaena glacialis</i>	North Atlantic right whale	E	E	IPaC, NOAA, TPWD	This species inhabits subtropical and temperate waters in the northern Atlantic. The north Atlantic right whale is very rare in the GOM, and the few reported sightings are likely vagrants (Ward-Geiger et al. 2011). They are known in Texas from a single individual that beached in February 1972 at Surfside Beach near Freeport, Brazoria County (Schmidly and Bradley 2016).	The north Atlantic right whale is unlikely to occur in the project area because its preferred habitat is much farther east. This species occurs only accidentally in the GOM, and this is certainly one of the rarest of cetaceans in these waters. The central Gulf may have been a whaling ground for right whales in the 1880s, but nothing is known of that reputed whaling effort. Only one stranding has been reported along the Texas coast. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Globicephala macrorhynchus</i>	Short-finned pilot whale	MMPA Protected	T	NOAA	This species is found in warm temperate to tropical waters worldwide, generally in deep offshore areas. Short-finned pilot whales are common in the GOM, with numerous stranding and sighting records available from Texas. They are seen inshore at infrequent intervals and occasionally become stranded by severe storms. They are among the most frequently stranded of cetaceans and often mass strand. These cetaceans have mass stranded 15 times in the GOM, although none of the events occurred in Texas (Schmidly and Bradley 2016). Their main foraging habitats consist of areas with high squid densities.	The short-finned pilot whale is unlikely to occur in the project area because of habitat limitations. This species typically prefers deeper waters. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Kogia breviceps</i>	Pygmy sperm whale	MMPA Protected	T	NOAA, TPWD	This species has a wide distribution. Pigmy sperm whales live in tropical, subtropical, and temperate waters in oceans and seas around the world. They are most common off coasts and along continental shelves. In the U.S., these whales live off the coasts of Hawai'i, the Pacific Northwest, the North Atlantic, and the northern GOM (NOAA 2022).	The pygmy sperm whale is unlikely to occur in the project area because of habitat limitations. It is a highly mobile species that prefers deeper waters. A local population is unknown, and recorded observations are mostly from strandings along beaches in the GOM. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.

Table 4-3. Threatened and Endangered Marine Species that May Occur in the Vicinity of the Project Area

Scientific Name	Common Name	Federal Status	State Status	Source ^a	Range & Habitat Requirements ^b	Potential of Occurrence in Project Area ^b	Potential for I&E
<i>Kogia simus</i>	Dwarf sperm whale	MMPA Protected	T	NOAA, TPWD	In the western North Atlantic, these whales are known from Virginia to the Lesser Antilles and the GOM. They strand fairly frequently. The most recent stranding period (2002–2014) included 10 strandings from six counties along the Texas coast (Schmidly and Bradley 2016; NOAA 2022).	The dwarf sperm whale is unlikely to occur in the project area, even though it contains potentially suitable habitat. However, this species is highly mobile and prefers deeper habitats. Local population are unknown, and the observations represent strandings along the coastline in GOM. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Megaptera novaeangliae</i>	Humpback whale	E		IPaC, NOAA, TPWD	This species inhabits tropical, subtropical, temperate, and subpolar waters world wide, but is rare in the GOM. Humpback whales migrate up to 5,000 miles between colder water (feeding grounds) and warmer water (calving grounds) each year (NOAA 2022). They use both open ocean and coastal waters, sometimes including inshore areas such as bays, and are often found near the surface. The northwest Atlantic/GOM distinct population segment is not considered at risk of extinction and is not listed as Endangered on the Endangered Species Act.	The humpback whale is unlikely to occur in the project area because of habitat limitations. Historically in the GOM, humpback whales were occasionally hunted near the Florida Keys, but they are uncommon in the Gulf proper. Only seven confirmed records have been reported in the GOM. Sightings have been made off the west coast of Florida and near Alabama in the eastern Gulf and off the jetties in Galveston, Texas. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Mesoplodon europaeus</i>	Gervais beaked whale	MMPA Protected	T	NOAA	This species is known primarily from the western North Atlantic, but members fairly commonly strand themselves in the GOM. Almost nothing is known about the life history of these whales. They are believed to inhabit deep waters close to shore, but little information is available on movements. They feed on squid and fish. This species prefers deep tropical, subtropical, and warm temperate waters of the Atlantic Ocean but is occasionally found in colder temperate seas (NOAA 2022). Strandings of Gervais's beaked whales are believed to be associated with calving, which probably takes place in shallow waters. A pregnant female with a near-term fetus stranded along the Texas coast (Schmidly and Bradley 2016). Specific data on their reproductive habits are not available.	The Gervais beaked whale is unlikely to occur in the project area because of unsuitable habitat. Several strandings have been reported in the northern GOM, including on Texas beaches, and this is considered the most abundant of the Mesoplodon species in the region. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Orcinus orca</i>	Killer whale	MMPA Protected	T	NOAA	Killer whales live throughout all oceans and contiguous seas, from equatorial regions to polar pack-ice zones, but they are more numerous in nearshore cold temperate to subpolar waters. They are rare in the GOM, although sightings have increased in recent years. They are known in Texas based on one stranding on South Padre Island and one sighting in waters off Port Aransas (Schmidly and Bradley 2016).	The killer whale is unlikely to occur in the project area because of habitat limitations. The species is also uncommon in the area. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Physeter macrocephalus</i>	Sperm whale	E	E	IPaC, NOAA, TPWD	This species inhabits tropical, subtropical, and temperate waters world wide, avoiding icy waters. Distribution is highly dependent on the sperm whale's food source (squids, sharks, skates, and fish), breeding, and pod composition. In general, this species migrates from north to south in the winter and south to north in the summer; however, individuals in tropical and temperate waters don't seem to migrate at all. They routinely dive to catch their prey (2,000-10,000 f) and generally occupy water at least 3,300 ft deep near ocean trenches (NOAA 2022).	The sperm whale is unlikely to occur in the project area because of habitat limitations. This species prefers deeper waters. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Pseudorca crassidens</i>	False killer whale	E	T	NOAA	False killer whales are found globally in all tropical and subtropical oceans and generally in deep offshore waters. They generally prefer offshore tropical to subtropical waters deeper than 3,300 ft. Numerous strandings and sightings have occurred in the GOM, including a few strandings from the upper Texas coast (Schmidly and Bradley 2016).	The false killer whale is not likely to occur in the project area because it lacks the deeper off-shore habitat preferred by this species. No local population are known to occur and the observations represent strandings on beaches in the GOM. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.

Table 4-3. Threatened and Endangered Marine Species that May Occur in the Vicinity of the Project Area

Scientific Name	Common Name	Federal Status	State Status	Source ^a	Range & Habitat Requirements ^b	Potential of Occurrence in Project Area ^b	Potential for I&E
<i>Stenella frontalis</i>	Atlantic spotted dolphin	T	T	TPWD	This pelagic species is found in 65-820 ft deep water near the continental shelf but is also found in coastal waters. It is a common offshore dolphin of the GOM that only rarely strands along the Texas coast (Schmidly and Bradley 2016). The species has been observed from about the 20- to the 200-m (66–656 ft) depth curves (Schmidly and Bradley 2016).	The Atlantic spotted dolphin may occur on the project area because it contains habitat that may be used by this species. However, this common dolphin is mostly pelagic and highly mobile. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Steno bredanensis</i>	Rough-toothed dolphin	MMPA Protected	T	NOAA	This species occurs in tropical and warm temperate waters around the world. Although rough-toothed dolphins are not very common in the GOM, they can occur at any time of the year. Their presence in Texas is known based on two historical strandings near Galveston and four more in the recent stranding record (2002–2014) from three counties (Kleberg, Brazoria, and Kennedy) (Schmidly and Bradley 2016). These are generally offshore, deep-water dolphins.	The rough-toothed dolphin is unlikely to occur on the project area because of habitat limitations. It is an uncommon species and recorded observations are mostly from strandings along beaches in the GOM. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Trichechus manatus</i>	West Indian Manatee	T	T	IPaC, TPWD	This species rarely occurs as far north as Texas. Manatees frequent warm waters in large rivers, brackish bays, and coastal areas. They are very sensitive to cold water and feed opportunistically on aquatic plants. This species migrates seasonally to adapt to changing water temperature.	The West Indian manatee is unlikely to occur in the project area, even though it contains habitat that might be used by this species. Manatees rarely occur in Texas. The last recorded occurrence was in 2004 near Port Aransas Inlet (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
<i>Ziphius cavirostris</i>	Goose-beaked whale	MMPA Protected	T	NOAA	This species is found in all tropical and temperate waters around the world. Several strandings and sightings have occurred in the northern GOM. There is a stranding recorded in Calhoun County, Texas, in 2004 (Schmidly and Bradley 2016).	The goose-beaked whale is unlikely to occur in the project area because of habitat limitations. 19 strandings have been recorded, mostly from the eastern part of the GOM, with very few from Texas. The TXNDD does not record the presence of this species in the project area (TXNDD 2019).	No potential for I&E. This species does not occur in project area.
Reptiles							
<i>Caretta caretta</i>	Loggerhead sea turtle	T	T	IPaC, NOAA, TPWD	This species is found in the GOM and are occasional visitors to the Texas coast. They migrate from feeding grounds to nesting beaches/barrier islands, and some nesting does occur in Texas (April to September). Beaches that are narrow, steeply sloped, with coarse-grain sand are preferred for nesting. Newly-hatched turtles depend on floating algae/seaweed for protection and foraging, which eventually transport them offshore and into open ocean. Juveniles and young adults spend their lives in open ocean, offshore before migrating to coastal areas to breed and nest. Foraging areas for adults include shallow continental shelf waters (TPWD 2022).	The highly-mobile loggerhead sea turtle is known to occur in the project area because it contains habitat that may be used by this species. The last recorded observation of this species near project area was in 2010 (Olsen 2022). Although uncommon, a green sea turtle nest was documented on Mustang Island (just to the south of Port Aransas) in 2008.	Minimal potential for I&E for all life stages: hatchlings stay close to the surface during the "hatchling frenzy period" when they rapidly swim from shore to their oceanic habitat; 3-inch mesh size bar screens will prevent neritic juveniles and adults from entering the intake structure.
<i>Chelonia mydas</i>	Green sea turtle	T	T	IPaC, NOAA, TPWD	This species is found in the GOM. Adults and juveniles occupy inshore and nearshore areas, including bays and lagoons with reefs and seagrass. Dependent upon life history stage, the green sea turtle has been documented using a variety of habitats. Adults spend most of their time within shallow coastal waterways with large sea grass beds (Reich et al. 2007). Juvenile turtles will spend most of their time within deep pelagic waters (Reich et al. 2007).	The highly-mobile green sea turtle is known to occur in the project area because it contains habitat that may be used by this species. Several occurrences were reported within 5 miles of the project area in 2004 and 2008 (TXNDD 2019). No recent nesting activity has been reported by this species along the beaches in the vicinity of the project area. However, this evaluation assumes that unreported nesting activity might occur and that hatchlings may therefore be present at certain times of the year.	Minimal potential for I&E for all life stages: hatchlings stay close to the surface during the "hatchling frenzy period" when they rapidly swim from shore to their oceanic habitat; 3-inch mesh size bar screens will prevent neritic juveniles and adults from entering the intake structure.
<i>Dermochelys coriacea</i>	Leatherback sea turtle	E	E	IPaC, NOAA, TPWD	This species is found in the GOM. It is the most pelagic of the sea turtle species and performs the longest migrations. It is an omnivore that prefers jellyfish, and nests between February and August. Nesting is not common in Texas (TPWD 2022).	The highly-mobile leatherback sea turtle is unlikely to occur on the project area even though it contains habitat that may be used by this species. The leatherback sea turtle is usually found in the deeper, open ocean rather than nearshore regions. The TXNDD does not record the presence of this species in the project area (TXNDD 2019). However, a leatherback nest was reported on Padre Island in 2008. ^d This evaluation assumes that unreported nesting activity might occur and that hatchlings may therefore be present at certain times of the year.	Minimal potential for I&E for all life stages: hatchlings stay close to the surface during the "hatchling frenzy period" when they rapidly swim from shore to their oceanic habitat; 3-inch mesh size bar screens will prevent neritic juveniles and adults from entering the intake structure.

Table 4-3. Threatened and Endangered Marine Species that May Occur in the Vicinity of the Project Area

Scientific Name	Common Name	Federal Status	State Status	Source ^a	Range & Habitat Requirements ^b	Potential of Occurrence in Project Area ^b	Potential for I&E
<i>Eretmochelys imbricata</i>	Hawksbill sea turtle	E	E	IPaC, NOAA, TPWD	This species is found in the GOM, including Texas. Hatchlings and juveniles are found in open, pelagic ocean and closely associated with floating algae/seagrass mats. Juveniles then migrate to shallower, coastal areas, mainly coral reefs and rocky areas, but also in bays and estuaries near mangroves when reefs are absent, seldom in water more than 65 ft deep. They feed on sponges, jellyfish, sea urchins, mollusks, and crustaceans. Nesting occurs from April to November high up on the beach where there is vegetation for cover and little or no sand. Some migrate, but others stay close to foraging areas (TPWD 2022). In the vicinity of the project area, juveniles occur in the nearshore waters of GoM and the waters near Aransas jetty.	The highly-mobile hawksbill sea turtle has the potential to occur in the project area. According to the TXNDD, the last recorded observation near port Aransas occurred in 1958 (TXNDD 2019). However, the National Park Service reports that juveniles occur in the nearshore waters of GOM and the waters near Aransas jetty. Post-hatchlings about 7.6 cm (3 in.) long have been found washed ashore alive in Sargassum seaweed, and juveniles about 30.5 cm (12 in.) long have been found washed ashore alive and entangled in mesh sacs. ^e Only one hawksbill nest has ever been documented in Texas, which was located at Padre Island National Seashore. ^e However, the project area lacks the coral reef habitat preferred by this species.	Minimal potential for I&E for all life stages: hatchlings stay close to the surface during the "hatchling frenzy period" when they rapidly swim from shore to their oceanic habitat; 3-inch mesh size bar screens will prevent neritic juveniles and adults from entering the intake structure.
<i>Lepidochelys kempii</i>	Kemp's Ridley sea turtle	E	E	IPaC, NOAA, TPWD	This species is found in the GOM. Adults are found in coastal waters with muddy or sandy bottoms. Some males migrate between feeding grounds and breeding grounds, but some don't. Females migrate between feeding and nesting areas, often returning to the same destinations. Nesting in Texas occurs on a smaller scale compared to other areas (i.e., Mexico). Hatchlings are quickly swept out to open water and are rarely found near shore. Similarly, juveniles often congregate near floating algae/seagrass mats off shore, and move into nearshore, coastal, neritic areas after 1-2 years and remain until they reach maturity. They feed primarily on crabs, but also snails, clams, other crustaceans and plants; juveniles feed on sargassum and its associated fauna. This species nests April through August.	The highly-mobile Kemp's Ridley sea turtle is known to occur in the project area because it contains habitat that may be used by this species. The last recorded presence was in 2016 when a Kemp's Ridley sea turtle was observed about 2 miles northeast and 3 miles southeast of the project area (TXNDD 2019). In 2022, a number of Kemp's Ridley nests were reported on beaches close to the project area. ^e	Minimal potential for I&E for all life stages: newborns stay close to the surface during the "hatchling frenzy period" when they rapidly swim from shore to their oceanic habitat; 3-inch mesh size bar screens will prevent neritic juveniles and adults from entering the intake structure.

Notes:

Table includes Federal and State Listed Threatened & Endangered Species that may occur near the proposed location of the intake (Project Area). The habitat of the project area is classified by the FWS as M1UBL, Marine Deepwater, Subtidal, Unconsolidated Bottom.

The following Taxonomic Groups were excluded from the table because they do not occur in Marine Deepwater habitat: All Birds, All Terrestrial species of Reptiles, Amphibians, and Mammals; All Freshwater Fish.

E = Endangered

I&E = impingement and entrainment

GOM = Gulf of Mexico

MMPA = Marine Mammal Protection Act

T = Threatened

TXNDD = Texas Natural Diversity Database

^aData Sources:

TPWD = Texas Parks and Wildlife Department, Wildlife Division, Diversity and Habitat Assessment Programs. TPWD County Lists of Protected Species and Species of Greatest Conservation Need.

<https://tpwd.texas.gov/gis/rtest/>. Last Update 7/12/2022. Accessed 8/18/2022.

IPaC = U.S. Fish & Wildlife Service (FWS) Information for Planning and Conservation FWS IPaC Resource list generated 8/18/2022, based on intake location (Informal- Not for Consultation)

NOAA = Threatened and Endangered Species and Critical Habitats Under National Oceanic and Atmospheric Administration (NOAA) Fisheries Jurisdiction. <https://www.fisheries.noaa.gov/species-directory/threatened-endangered>. Last updated by Southeast Regional Office on 9/1/2021. Accessed September 2022.

^bLocal Habitat Descriptions adapted from TPWD, NOAA, and cited references.

^cRice's whale was formerly known as GOM Bryde's whale and listed in 2019 as an endangered subspecies. In 2021, NOAA revised the name and it is now called Rice's whale, *Balaenoptera ricei*.

^dNPS 2022. <https://www.nps.gov/pais/learn/nature/current-nesting-season.htm>. Accessed September 9, 2022.

^eNPS 2022. <https://www.nps.gov/pais/learn/nature/hawksbill.htm> Accessed September 9, 2022.

NPS 2022. <https://www.nps.gov/pais/learn/nature/leatherback.htm>. Accessed September 9, 2022.

<https://www.seaturtlestatus.org/online-map-data>

Table 4-4. Summary of Sea Turtle Life Histories

	Kemp's Ridley (<i>Lepidochelys kempii</i>)	Loggerhead (<i>Caretta caretta</i>)	Hawksbill (<i>Eretmochelys imbricata</i>)	Green (<i>Chelonia mydas</i>)	Leatherback (<i>Dermochelys coriacea</i>)
Hatchlings					
Size	Mean: 3.8 to 4.4 cm SCL	Mean: 5.4 cm SCL Range: 4.6 to 6.3 cm SCL	Range: 5 to 21 cm SCL	Mean: 5 cm SCL Range: 4.4 to 5.8 cm SCL	Mean: 5.91 to 9.07 cm SCL Range: 7.91 to 9.90 cm SCL
Diet	Not reported	Not reported	<i>Sargassum</i> , manatee grass, crab chela, eggs of flying fish, half-beaks, and needlefish	Not reported	Not reported
Post-Hatchlings					
Size	Not reported	Range: 3.9 to 7.8 cm SCL	Not reported	Not reported	Not reported
Duration	Not reported	Estimated value: <1 year	Not reported	Not reported	Estimated value: 1 year
Oceanic Juveniles					
Size	Range: 5 to 19 cm SCL	Estimated range: 15 to 63 cm SCL	Range: 20.1 to 29.1 cm SCL	Mean: 20 cm SCL Range: 15 to 6.3 cm SCL	Range: 10 to 134.7 cm SCL
Duration	Mean: 2 years Estimated maximum: 4 years	Estimated range: 7 to 11.5 years	Not reported	Estimated mean: 2 years	Estimated range: 11 to 13 years
Diet	Marine mollusks associated with the pelagic <i>Sargassum</i> community, including brown janthinas, <i>Cavolinallon girostris</i> , <i>Sargassum</i> snails, and unidentifiable crabs, <i>Sargassum</i> , hardhead catfish, blue crabs, stone crabs, and mottled purse crabs	<i>Sargassum</i> , pelagic crustaceans, and mollusks	<i>Sargassum</i> , manateegrass, crab chela, eggs of flying fish, half-beaks, and needlefish	Marine animals related to pelagic <i>Sargassum</i> , including hydroids, bryozoans, <i>Membranipora sp.</i> , portunid crabs, gastropods, serpulid polychaetes, <i>Porpita sp.</i> , <i>Sargassum</i> nudibranchs, <i>Vellela sp.</i> , <i>Sargassum</i> snails, <i>Pyrosoma sp.</i> ; plane head filefish; <i>Sargassum</i> ; and coralline and cladophora algae	<i>Aurelia sp.</i> , <i>Ocryopsis sp.</i> , warty comb jellyfish, and tunicates
Neritic Juveniles					
Size	Range: 20 to 60 cm SCL	Range: 41.6 to 79.7 cm SCL	Range: 20 to 69 cm SCL	Mean: 34.2 cm SCL Range: 26.6 to 52 cm SCL	Not reported
Duration	Range: 7 to 9 years	Estimated value: 20 years	Not reported	Estimated range: 17 to 19 years	Not reported
Diet	Speckled swimming crabs, blue crabs, longnose spider crabs, mottled purse crabs, <i>Libinia sp.</i> , calico crabs, surf hermits, Gulf stone crabs, bruised nassas, sharp nassas, moon snails, concentric nut clams, oysters, <i>Ovalipes sp.</i> , flat-clawed hermit crabs, blood ark clams, transverse ark clams, <i>Anadara sp.</i> , <i>Bittium sp.</i> , angelwing clams, <i>Epitonium sp.</i> , dwarf surf clams, <i>Terebra sp.</i> , annelids, common sand dollars, mullet American star drums, spot croakers, <i>Sargassum</i> , shoal grass, <i>Gracilaria sp.</i> , turtle grass, brown shrimp, and white shrimp	Pipe cleaner sea pens, calico crabs, <i>Libinia sp.</i> , blue crabs, <i>Persephona sp.</i> , bivalves, gastropods, and carrion from fisheries bycatch	Sponges, including <i>Chondrilla sp.</i> , <i>Dictyopteris sp.</i> , <i>Hypnea sp.</i> , <i>Jania sp.</i> , <i>Laurencia sp.</i> , <i>Ceramium sp.</i> , <i>Codium sp.</i> , and <i>Gracilaria sp.</i>	Turtle grass, shoalgrass, manatee grass, <i>Laurencia sp.</i> , and <i>Enteromorpha sp.</i>	Not reported

Table 4-4. Summary of Sea Turtle Life Histories

	Kemp's Ridley (<i>Lepidochelys kempii</i>)	Loggerhead (<i>Caretta caretta</i>)	Hawksbill (<i>Eretmochelys imbricata</i>)	Green (<i>Chelonia mydas</i>)	Leatherback (<i>Dermochelys coriacea</i>)
Sexually Mature Adults					
Size	Range: 60 cm SCL	Mean: 79.7 to 92.4 cm SCL Range: 73.7 to 108 cm SCL	Mean: 90 to 99.6 cm SCL Range: 82.7 to 98.6 cm SCL	Mean: 100.3 to 101.8 cm SCL Range: 69.2 to 114 cm SCL	Mean: 147.7 cm SCL Range: 127.4 to 172.7 cm SCL
Age at Sexual Maturity	Mean: 10 years Range 10 to 20 years	Estimated value: 27 years	Minimum: 14 years Mean: 24 to 31.2 years	Estimated range: 18 to 27 years	Range: 12 to 29 years
Diet	Speckled swimming crabs, blue crabs, mottled purse crabs, Libinia sp., calico crabs, surf hermits, Gulf stone crabs, bruised nassas, sharp nassas, moon snails, concentric nut clams, oysters, star drums, spot croakers, Sargassum, shoalgrass, Gracilaria sp., turtle grass, brown shrimp, and white shrimp	Pipe cleaner sea pens, calico crabs, Libinia sp., blue crabs, Persephona sp., bivalves, gastropods, and carrion from fisheries bycatch	Sponges, including chicken liver sponge, demosponges, and button polyp, <i>Ricordea florida</i> , <i>Ancorina</i> sp., <i>Geodia</i> sp., <i>Placospongia</i> sp., <i>Suberites</i> sp., <i>Myriastr</i> sp., <i>Ecionemia</i> sp., <i>Chondrosia</i> sp., <i>Aptos</i> sp., and <i>Tethya actinia</i>	Turtle grass, star grass, shoalgrass, manatee grass, eelgrass, algae, jellyfish, sponges, and sea pens	Cannonball jellyfish

Source:

Table adapted from Valverde and Holzwart (2017)

Notes:

SCL = straight carapace length

Table 4-5. Abundant and Common Species in the Vicinity of the Project Area Based on NOAA Catch Data

Organism Type	Zone	Species	Scientific Name	WTCPUE Max	
Invertebrate	Cnidarian	Demersal	Sea pansy	<i>Renilla mulleri</i>	0.0719
		Pelagic	Sea nettle	<i>Chrysaora quinquecirrha</i>	0.2168
	Decapod (Crab)	Demersal	Lesser blue crab	<i>Callinectes similis</i>	9.2384
			Blue crab	<i>Callinectes sapidus</i>	0.1670
			Longspine swimming crab	<i>Achelous spinicarpus</i>	0.1535
			Stilt spider crab	<i>Anasimus latus</i>	0.1263
	Decapod (shrimp)	Demersal	Brown shrimp	<i>Penaeus aztecus</i>	6.3835
			Northern white shrimp	<i>Litopenaeus setiferus</i>	2.3997
			Mantis shrimp	<i>Squilla empusa</i>	0.4950
			Mantis shrimp	<i>Squilla neglecta</i>	0.0656
	Echinoderm	Demersal		<i>Astropecten cingulatus</i>	0.1486
			Lined sea star	<i>Luidia clathrata</i>	0.0879
	Cephalopod	Demersal	Atlantic brief squid	<i>Lolliguncula brevis</i>	0.8126
		Epipelagic	Longfin inshore squid	<i>Loligo pealeii</i>	0.5261
		Pelagic	Slender inshore squid	<i>Loligo pleii</i>	1.1673
Vertebrate	Elasmobranch	Benthopelagic	Lesser electric ray	<i>Narcine brasiliensis</i>	2.0418
			Bonnethead	<i>Sphyrna tiburo</i>	1.4581
	Fish	Benthopelagic	Atlantic moonfish	<i>Selene setapinnis</i>	4.6274
			Atlantic cutlassfish	<i>Trichiurus lepturus</i>	4.4652
			Hardhead catfish	<i>Ariopsis felis</i>	2.7242
			Rough scad	<i>Trachurus lathami</i>	2.3260
		Demersal	Atlantic croaker	<i>Micropogonias undulatus</i>	65.3385
			Spot	<i>Leiostomus xanthurus</i>	6.1754
	Pelagic	Banded drum	<i>Larimus fasciatus</i>	5.8619	
		Southern kingfish	<i>Menticirrhus americanus</i>	3.8297	
Longspine porgy		<i>Stenotomus caprinus</i>	1.9661		
Gulf butterfish		<i>Peprilus burti</i>	9.9523		
Pelagic	Atlantic thread herring	<i>Opisthonema oglinum</i>	5.4062		
	Atlantic bumper	<i>Chloroscombrus chrysurus</i>	2.3295		
	Gulf menhaden	<i>Brevoortia patronus</i>	2.0250		

Source: <https://apps-st.fisheries.noaa.gov/dismap/>

Species selected based on the 15 highest weight catch per unit effort (WTCPUE) for both invertebrates and vertebrates.

Table 4-6. Abundant and Common Species in the Vicinity of the Project Area Based on TPWD Catch Data

Organism Type	Zone	Species	Scientific Name	Sum Catch per Hour	
Invertebrate	Cnidarian	Demersal	Sea pansy	<i>Renilla mulleri</i>	653,139
	Cephalopod	Demersal	Atlantic brief squid	<i>Lolliguncula brevis</i>	340,750
	Decapod (shrimp)	Demersal	Roughback shrimp	<i>Trachycaris rugosa</i>	249,347
	Cnidarian	Pelagic	Moon jelly	<i>Aurelia aurita</i>	170,918
	Decapod (shrimp)	Demersal	Brown shrimp	<i>Penaeus aztecus</i>	158,258
	Decapod (crab)	Demersal	Lesser blue crab	<i>Callinectes similis</i>	137,300
	Echinoderm	Demersal	Striped sea star	<i>Luidia clathrata</i>	105,644
	Decapod (shrimp)	Demersal	White shrimp	<i>Litopenaeus setiferus</i>	104,092
	Cephalopod	pelagic	Slender inshore squid	<i>Loligo pleii</i>	57,605
	Decapod (shrimp)	Demersal	(Common mantis shrimp)	<i>Stomatopoda</i>	51,206
	Cephalopod	Epipelagic	Longfin inshore squid	<i>Loligo pealeii</i>	50,509
	Decapod (crab)	Benthopelagic	Iridescent swimming crab	<i>Portunus gibbesii</i>	45,812
	Echinoderm	Demersal	Five-holed sand dollar	<i>Mellita quinquesperforata</i>	45,409
	Decapod (shrimp)	Demersal	(Rimapenaeid shrimp - unidentified)	<i>Rimapenaeus sp.</i>	38,929
	Cnidarian	Demersal	Order anemones	<i>Actiniaria</i>	29,557
	Vertebrate Fish	Pelagic	Atlantic bumper	<i>Chloroscombrus chrysurus</i>	672,642
Demersal		Atlantic croaker	<i>Micropogonias undulatus</i>	610,649	
		Silver seatrout	<i>Cynoscion nothus</i>	376,080	
Pelagic		Gulf butterfish	<i>Peprilus burti</i>	238,298	
		Sand seatrout	<i>Cynoscion arenarius</i>	198,466	
Demersal		Spot	<i>Leiostomus xanthurus</i>	142,321	
		Shoal flounder	<i>Syacium gunteri</i>	123,128	
Benthopelagic		Banded drum	<i>Larimus fasciatus</i>	110,602	
		Atlantic moonfish	<i>Selene setapinnis</i>	81,108	
Demersal		Star drum	<i>Stellifer lanceolatus</i>	74,068	
		Longspine porgy	<i>Stenotomus caprinus</i>	69,609	
		Atlantic threadfin	<i>Polydactylus octonemus</i>	42,953	
		Pinfish	<i>Lagodon rhomboides</i>	41,275	
		Red snapper	<i>Lutjanus campechanus</i>	35,873	
Benthopelagic		Atlantic cutlassfish	<i>Trichiurus lepturus</i>	33,440	

Source:

Olson, Z. 2022. Email correspondence between M. Abbene (Integral Consulting Inc.) and Z. Olsen (TPWD), August 30, 2022.

Species selected based on the 15 highest sum catch per hour for both invertebrates and vertebrates.

Table 4-7. Abundant, Frequently Impinged, and Commercially and/or Recreationally Important Species

Scientific Name	Common Name	Stunz and Montagna (2015)	Neuces Bay Power Station Permit Renewal (WCM Group Inc. 2020)		GBNEP (1993)			Barney M. Davis Power Plant (Shepherd et al. 2016)	National Marine Fisheries Service (2012)	NOAA and TPWD (Appendix B)	40 CFR 125.92(m)
		Potentially Impacted	Species Collected from Power Station	Representative Species for Impingement Analysis	Species Comprising ≥1% of Total Impinged during Each Study	Abundant and Frequently Impinged	Commercially and Recreationally Important	Species Impinged	Commercially and Recreationally Important	Abundant Species	Fragile Species ^a
<i>Hyporhamphus meeki</i>	American halfbeak	x									
<i>Lolliguncula brevis</i>	Atlantic brief squid	x								x	
<i>Chloroscombrus chrysurus</i>	Atlantic bumper	x			x					x	
<i>Micropogonias undulatas</i>	Atlantic croaker	x	x	x	x	x	x	x	x	x	
<i>Trichiurus lepturus</i>	Atlantic cutlassfish				x					x	
<i>Porichthys porosissimus</i>	Atlantic midshipman				x						
<i>Chaetodipterus faber</i>	Atlantic spadefish				x						
<i>Polydactylus octonemus</i>	Atlantic threadfin				x						
<i>Anchoa mitchilli</i>	Bay anchovy	x	x		x	x	x	x			x
<i>Prinotus tribulus</i>	Bighead searobin				x						
<i>Pogonias cromis</i>	Black drum	x			x		x				
<i>Symphurus plagiusa</i>	Blackcheek tonguefish				x						
<i>Ictalurus furcatus</i>	Blue catfish		x								
<i>Pomatomus saltatrix</i>	Bluefish	x									x
<i>Gobiosoma robustum</i>	Code coby	x									
<i>Ctenogobius boleosoma</i>	Darter goby	x									
<i>Hypsoblennius hentz</i>	Feather blenny	x									
<i>Dorosoma cepedianum</i> ^b	Gizzard shad				x						x
<i>Microgobius thalassinus</i>	Green goby	x									
<i>Peprilus burtri</i>	Gulf butterfish				x					x	
<i>Paralichthys albigutta</i>	Gulf flounder	x									
<i>Fundulus grandis</i>	Gulf killifish		x		x						
<i>Brevoortia patronus</i>	Gulf menhaden	x	x		x	x	x	x	x	x	x
<i>Peprilus alephidotus</i>	Harvestfish				x						
<i>Trinectes maculatas</i>	Hogchoaker	x									
<i>Synodus foetens</i>	Inshore lizardfish	x									
<i>Elops saurus</i>	Ladyfish	x					x				
<i>Sphoeroides parvus</i>	Least puffer				x						
<i>Achirus lineatus</i>	Lined sole		x		x						
<i>Synodontidae sp.</i>	Lizardfish	x									
<i>Gobiosoma bosc</i>	Naked goby	x	x	x							
<i>Lagodon rhomboides</i>	Pinfish	x	x				x		x		
<i>Syngnathidae sp.</i>	Pipefish	x									
<i>Tetradontidae sp.</i>	Puffer fish	x									
<i>Sciaenops ocellatus</i>	Red drum	x	x	x	x			x			
<i>Cynoscion arenarius</i>	Sand seatrout		x		x	x		x		x	
<i>Arius felis</i>	Sea catfish				x						
<i>Triglidae sp.</i>	Sea robin	x									

Table 4-7. Abundant, Frequently Impinged, and Commercially and/or Recreationally Important Species

Scientific Name	Common Name	Stunz and Montagna (2015)	Neuces Bay Power Station Permit Renewal (WCM Group Inc. 2020)	GBNEP (1993)			Barney M. Davis Power Plant (Shepherd et al. 2016)	National Marine Fisheries Service (2012)	NOAA and TPWD (Appendix B)	40 CFR 125.92(m)
		Potentially Impacted	Species Collected from Power Station	Representative Species for Impingement Analysis	Species Comprising ≥1% of Total Impinged during Each Study	Abundant and Frequently Impinged	Commercially and Recreationally Important	Species Impinged	Commercially and Recreationally Important	Abundant Species
<i>Archosargus probatocephalus</i>	Sheepshead		x							
<i>Cyprinodon variegatus</i>	Sheepshead minnow		x		x					
<i>Ophichthus gomesii</i>	Shrimp eel	x			x					
<i>Bairdiella chrysoura</i>	Silver perch	x	x	x						
<i>Menidia sp.</i>	Silversides	x	x							
<i>Gobiesox strumosus</i>	Skilletfish	x	x							
<i>Paralichthys lethostigma</i>	Southern flounder	x			x	x		x		
<i>Leiostomus xanthurus</i>	Spot croaker	x	x		x	x	x		x	
<i>Eucinostomus argenteus</i>	Spotfin mojarra	x								
<i>Cynoscion nebulosus</i>	Spotted seatrout	x	x	x	x	x		x		
<i>Stellifer lanceolatus</i>	Star drum				x					
<i>Chasmodes bosquianus</i>	Striped blenny		x							
<i>Chilomycterus schoepfi</i>	Striped burrfish	x								
<i>Mugil cephalus</i>	Striped mullet	x			x			x		
<i>Megalops atlanticus</i>	Tarpon	x								
<i>Dorosoma petenese</i>	Threadfin shad				x					
<i>Callinectes sapidus</i>	Blue crab	x	x	x	x	x	x	x	x	
<i>Callinectes similis</i>	Gulf crab (lesser blue crab)	x	x	x	x				x	
<i>Penaeus aztecus</i>	Brown shrimp	x	x	x	x	x	x	x	x	
<i>Penaeus duorarum</i>	Pink shrimp	x	x	x				x		
<i>Penaeus setiferus</i>	White shrimp	x	x	x	x	x		x	x	
<i>Hippolytidae</i>	Cleaner shrimp	x						x		
<i>Palaemonidae</i>	Grass shrimp	x					x			
<i>Mysidae</i>	Mysid shrimp	x					x			
<i>Aurelia aurita</i>	Moon jelly		x						x	

Notes:

Shading identifies potential target species, reflecting those required in 316b (fragile species, abundant species, and commercially and recreationally important species), except for T&E species, which are addressed separately in this report. Shaded species fell into at least one of these categories. Species shaded in dark gray were selected as target species (up to six invertebrate and six vertebrates). All fragile species, except for gizzard shad (see note b), were also retained as target species. For the remaining species, preference was given to those species falling into more than one of the aforementioned categories and consideration was given to reflect a variety of life histories.

^a Fragile species identified in the cited impingement and entrainment studies.

^b Although gizzard shad is a fragile species mentioned in GBNEP (1993), this species spends its entire life in fresh to brackish water and is therefore not expected to be present in the Gulf of Mexico.

Table 4-8. General Life History Traits of the 11 Target Fish and Invertebrate Species Susceptible to Impingement and Entrainment

Species Name	Scientific Name	Range	General Habitat					Source	Notes
			Eggs	Larvae	Juveniles	Adults			
Atlantic Croaker	<i>Micropogonias undulatus</i>	Marine; brackish; demersal; depth range up to 100 m	* Eggs are pelagic and buoyant in the GOM. * Incubation time is 29–32 hours at 23°C and 26–30 hours at 25°C.	* Larvae are pelagic and may spend time in the plankton but soon become demersal. * Early larvae are found in the mid- to outer continental shelf at depths ranging from 15 to 115 m located 20 to 200 km offshore.	* Juveniles become even more demersal than post-larvae and move into tidal creeks and other headwater areas. * They occur in estuarine to riverine environments where they seek out soft substrate.	* Adults are demersal and move between estuarine and oceanic waters. * They have seasonal inshore and offshore migrations, although some appear to remain in offshore waters year round. * They have been collected from depths ranging between 1 and 90 m over soft substrate. * Adults move up bays and estuaries in the spring, randomly in the summer, and seaward in the fall. * Spawning occurs in the open GOM near the mouths of the passes that lead into the shallow bays and lagoons. Spawning is reported to occur within a depth range of 7.8 to 81 m.	fishbase.org; Lassuy (1983a); Patillo et al. (1997)	Non-fragile	
Bay Anchovy	<i>Anchoa mitchilli</i>	Marine; freshwater; brackish; pelagic-neritic; amphidromous; depth range 1–70 m, usually 1–36 m	* Buoyant when fresh, demersal at 12–16 hours	* Pelagic and occurs throughout the water column.	* Pelagic and occurs throughout the water column.	* Shallow tidal areas with muddy bottoms and brackish waters.	fishbase.org; Patillo et al. (1997)	Fragile	
Bluefish	<i>Pomatomus saltatrix</i>	Marine; brackish; pelagic-oceanic; oceanodromous; depth range 0–200 m	* Pelagic and planktonic	* Planktonic	* Shallow coastal waters at least 2 m depth, in schools pursuing small fish	* Oceanic and coastal waters. * Most common along surf beaches and rock headlands in clean, high energy waters, although adults can also be found in estuaries and into brackish water.	fishbase.org	Fragile	
Gulf Menhaden	<i>Brevoortia patronus</i>	Marine; pelagic-neritic; depth range 0–50 m	* Eggs are planktonic and pelagic in the GOM.	* Larvae stay in offshore waters 3–5 weeks as currents carry them into estuaries.	* Nektonic, estuaries	* Inshore, offshore, pelagic	fishbase.org; Patillo et al. (1997)	Fragile	
Red Drum	<i>Sciaenops ocellatus</i>	Marine; brackish; demersal; oceanodromous	* Buoyant eggs are released in nearshore and inshore waters, typically inside the 20- m depth contour of the GOM. * Eggs float at salinities >25 ppt but sink at salinities <20 ppt. * Freshly-spawned eggs were recovered during one investigation in water depths ranging from 1.5 to 2.1 m. * Eggs are transported by tides into bays and estuaries. * The eggs are planktonic and pelagic. * Optimum hatching & survival conditions: 25°C and 30 ppt. * Hatching occurs in 18 to 30 hours, depending on surface water temperature and dissolved oxygen levels. * Duration: mid-August to December/early January --> see adult spawning.	* The embryo-larvae are planktonic and pelagic. * Larvae are carried by tidal currents into the shallow inside waters of bays and estuaries. * Larvae move through the passes in mid-channel surface water with the tidal currents and tend to seek shallow slack water along the sides of the channels to avoid being carried offshore during periods of ebb tide. * Once in estuaries, larvae seek grassy quiet coves, tidal flats, and lagoons among vegetation over sandy/muddy bottoms for protection from predation and currents. * Size range: 4–6 mm	* Tend to migrate from primary bays, which open to the sea, into secondary bays, which open into the primary bays. * Seek out structured habitat (e.g., seagrass meadows, oyster reefs, and habitat edges) in shallow waters (<0.5 m), but also deeper (3.05 m). * Intra-bay movement occurs, but with minimal inter-bay movement (i.e., high residency). * Juveniles can also move into the GOM or deeper water in or near passes in the winter. * Older juveniles (40–120 mm) tend to move in slightly deeper and more open waters and into primary bays in somewhat deeper waters (>1.8 m). * As juveniles approach 200 mm during their first spring, they may remain in deep-water areas of bays, or congregate near passes, usually in large aggregations. * Size range: 15–300 mm	* Relatively non-migratory but with broad random movements. * Occasionally found in shallow bays, but tend to spend more time in marine habitats after their first spawning. * Adults spawn in deeper waters at the mouths of bays. * Typically found in the GOM in littoral and shallow nearshore waters off beaches. * Migrating fish may use salinity gradients as predictive cues for directed movements from estuarine to oceanic habitats and back.	Moulton et al. (2017); Reagan (1985); Brown et al. (2005); Pattillo et al. (1997); Sink et al. (2018)		

Table 4-8. General Life History Traits of the 11 Target Fish and Invertebrate Species Susceptible to Impingement and Entrainment

Species Name	Scientific Name	Range	General Habitat				Source	Notes
			Eggs	Larvae	Juveniles	Adults		
Spotted Seatrout	<i>Cynoscion nebulosus</i>	Marine; brackish; demersal; non-migratory.	<ul style="list-style-type: none"> * Eggs can be either buoyant/pelagic (≥ 30 ppt) or demersal (≤ 25 ppt). * Eggs are found from marine to estuarine environments. * Eggs are generally associated with grass beds at or near barrier-island passes. * Hatching occurs in 16 to 40 hours at 25°C. * Duration: February to October; see adult spawning. 	<ul style="list-style-type: none"> * Can be transported on flood tides through passes connecting the GOM to inside waters. * Size range: 1.3 to 10–12 mm * Upon hatching, larvae can swim upwards into the water column but move towards the bottom after 4 to 7 days (depths not reported). * Duration of embryo-larval lifestage not found. * Seek out shallow, vegetated (i.e., seagrass beds) estuarine areas, but may also occur abundantly in areas without extensive seagrass beds (depths not reported). * Larvae are demersal in deep channels (depths not provided) with shell rubble, or in bottom vegetation. * The deep channels near grass beds may serve as their initial habitat, before moving into the grass beds as juveniles. * Duration of post-larval lifestage not found. 	<ul style="list-style-type: none"> * Prefer bare substrate over deeper water (0.5–1.5 m) but also occur over sea grass meadows and habitat edges in shallower waters (<0.5 m). * Juveniles in FL have been reported from a water depth ranging between 0.5 m and 2.2 m. * May occur abundantly in areas without extensive seagrass beds, such as backwaters (e.g., bayous, tidal creeks, slow-moving rivers, mangrove-lined depressions), or marshes. * Intra-bay movement occurs, but with minimal inter-bay movement (i.e., high residency). * Juveniles remain in the estuarine nursery areas at least through the summer months, but may move to deeper water in the winter (depth range not specified) in response to lower water temperatures. * They rarely migrate into the GOM until they are mature. * Juveniles range in size from 10 to 12 mm to 180 to 200 mm. 	<ul style="list-style-type: none"> * Seagrass beds are the preferred habitat, but adults also occur in mangrove-lined depressions, and in relatively-deep basins, tidal river mouths, channels, and canals. * Adults linger around the entrance of the passes year-round but may also occur in the surf zone of barrier islands, particularly in the fall. * Adults migrate very little, with most movements occurring seasonally in association with thermal and salinity tolerances, and with spawning activities. * Fall emigration to the deeper warmer waters of the bays or the GOM is apparent. * Spawning occurs in deeper holes and scour channels in seagrass meadows in depths of 3–4.6 m within estuaries, but may also occur in lower regions of estuaries, near passes between barrier islands, or even outside of estuaries. * Duration: spawning occurs from February to October (peak spawning from April to July). 	Moulton et al. (2017); Froeschke and Froeschke (2011); Lassuy (1983b); Patillo et al. (1997); fishbase.org	Non-fragile
Blue Crab	<i>Callinectes sapidus</i>	Benthopelagic; freshwater; brackish; depth range 0–90 m	<ul style="list-style-type: none"> * Eggs are carried externally by the female for approximately 2 weeks * Hatching occurs in mouths of estuaries and shallow marine waters 	<ul style="list-style-type: none"> * Development of larvae progresses in the ocean. * Zoeae are planktonic, and remain in offshore waters for up to 1 month. Re-entry to estuarine waters occurs during the megalopal stage. 	<ul style="list-style-type: none"> * Migration of megalopae and young crabs back into estuarine waters, demersal and estuarine. 	<ul style="list-style-type: none"> * Active and abundant in shallow habitats. * Demersal and estuarine. 	sealifebase.org; Patillo et al. (1997)	Non-fragile
Gulf Crab (lesser blue crab)	<i>Callinectes similis</i>	Benthopelagic; depth range 0– 379 m	<ul style="list-style-type: none"> * External brooder 	<ul style="list-style-type: none"> * Planktonic 		<ul style="list-style-type: none"> * Benthopelagic * Inhabits marine littoral water, seldom in estuaries. 	sealifebase.org	
Brown Shrimp	<i>Penaeus aztecus</i>	Benthic; depth range 110 m (GMFMC 2004) (0–200 m sealifebase.org)	<ul style="list-style-type: none"> * Eggs are denser than seawater and are demersal * Commonly found fall to spring (18–110 m) in soft bottom habitats (sand, shell) 	<ul style="list-style-type: none"> * Larval stages are planktonic; their position in the water column is dependent on time of day, water temperature and clarity. * Post-larvae spawned in the fall may burrow into the sediments to escape cooler temperatures and overwinter. * Post-larvae move into estuaries and transform into juveniles. 	<ul style="list-style-type: none"> * Estuarine and marine, benthic, pelagic * Juveniles are common in estuarine waters at <1 m depth; juveniles emigrate from shallow estuaries to deeper waters. * Sub-adults common in 1–18 m of water. 	<ul style="list-style-type: none"> * Marine, benthic, associated with soft substrates (silt, mud, sand). 	sealifebase.org; Patillo et al (1997); GMFMC (2004)	Non-fragile
Pink Shrimp	<i>Penaeus duorarum</i>	Benthic; depth range 0–110 m (GMFMC 2004) (0–330 m sealifebase.org)	<ul style="list-style-type: none"> * Benthic, commonly found in offshore waters 9–48 m on soft bottom habitat (sand, shell) 	<ul style="list-style-type: none"> * Estuarine, marine, planktonic * Commonly found at depths of 1–50 m 	<ul style="list-style-type: none"> * Estuarine, late post-larvae and juveniles commonly found <3 m. * Sub-adult individuals can be found at depths of 1–65 m. 	<ul style="list-style-type: none"> * Adults are demersal. * Spawning adults commonly found at depths of 9–48 m spring through fall (TX). * Non-spawning adults common at depths of 1–110 m, year-round. 	sealifebase.org; GMFMC (2004)	
White Shrimp	<i>Penaeus setiferus</i>	Benthic; brackish; depth range 0–82 m (GMFMC 2004) (0–119 m sealifebase.org)	<ul style="list-style-type: none"> * Benthic, offshore, nearshore, and estuarine waters * Common spring to fall 	<ul style="list-style-type: none"> * Planktonic, post-larvae become benthic upon reaching the nursery areas of estuaries. 	<ul style="list-style-type: none"> * Estuarine waters <1 m. * Sub-adults common 1–30 m on soft bottom habitat (sand, shell). * Migration from estuaries is common during August and September. 	<ul style="list-style-type: none"> * Benthic (diurnal activity). * Common in estuarine, nearshore, and offshore waters in soft bottom habitats. * Commonly found <27 m, spawning adults commonly found 9–34 m from June to July. 	sealifebase.org; Patillo et al. (1997); GMFMC (2004)	

Table 5-1. Potential for Impingement and Entrainment by Four Key Life Stages of the 11 Target Fish and Invertebrate Species

Species	Scientific Name	Egg		Larvae		Juvenile		Adult		Source
		I&E Potential	Reason for Ranking	I&E Potential	Reason for Ranking	I&E Potential	Reason for Ranking	I&E Potential	Reason for Ranking	
Atlantic Croaker	<i>Micropogonias undulatas</i>	Low	Eggs are pelagic and positively buoyant.	Low	Larvae are free floating but quickly become demersal. Larvae are also more common at depths greater than the proposed intake structure, and farther offshore.	Minimal	Juveniles become even more demersal than post-larvae and move into tidal creeks and other headwater areas. They frequently occur in estuarine to riverine environments where they seek out soft substrate.	Low	Adults are demersal and capable swimmers that move between estuarine and oceanic waters.	fishbase.org; Lassuy (1983a); Patillo et al. (1997)
Bay Anchovy	<i>Anchoa mitchilli</i>	Medium	Fresh eggs are pelagic and positively buoyant at first but then sink into the water column before hatching; eggs become demersal after 12-16 hours.	High	Larvae are free-floating and planktonic.	Low	Juveniles are pelagic and swim throughout the water column. Juveniles are capable swimmers.	Low	Adult are pelagic and capable swimmers.	fishbase.org; Patillo et al. (1997)
Bluefish	<i>Pomatomus saltatrix</i>	Low	Eggs are pelagic and planktonic and are laid offshore over the continental shelf.	High	Larvae are free-floating and planktonic and move inshore as they mature.	Low	Juvenile are capable swimmers and form schools to hunt.	Low	Lifestage more common near high energy coastal habitat; potentially found in nearshore waters. Adults are capable swimmers.	fishbase.org; Patillo et al. (1997)
Gulf Menhaden	<i>Brevoortia patronus</i>	High	Spawning occurs in inshore and offshore waters. Eggs are planktonic and pelagic.	Medium	Larvae are free-floating and planktonic. They are found at greatest densities near the surface but sink at night. They are most common offshore but move inshore before entering estuaries.	Minimal	Juveniles develop in estuarine environments. This lifestage is absent from the area of the proposed water intake structure.	Low	Adults are pelagic and capable swimmers.	fishbase.org; Patillo et al. (1997)
Red Drum	<i>Sciaenops ocellatus</i>	Low	Eggs are pelagic and buoyant, and more likely found higher in the water column in the salty GOM. Eggs sink only in salinity <25 ppt.	High	Larvae consist of a free-floating planktonic stage found throughout water column.	Minimal	Juveniles move into shallow estuaries to mature. They are absent from the area of the proposed water intake structure.	Low	Adults are demersal and strong, capable swimmers.	Moulton et al. (2017); Reagan (1985); Brown et al. (2005); Pattillo et al. (1997); Sink et al. (2018)
Spotted Seatrout	<i>Cynoscion nebulosus</i>	Low	Eggs are pelagic and are positively buoyant at salinities ≥30 ppt. Spawning habitat mainly associated with coastal bays, estuaries, and lagoons, but also in inshore GOM.	Medium	Larvae are planktonic for a short duration before settling to the sea bed	Minimal	Juveniles seek out shallow habitat <2.2 m associated with seagrass.	Low	Adults are demersal and strong, capable swimmers. Low probability of presence in the area of the proposed water intake structure due to habitat preferences.	Moulton et al. (2017); Froeschke and Froeschke (2011); Lassuy (1983b); Patillo et al. (1997); fishbase.org
Blue Crab	<i>Callinectes sapidus</i>	Minimal	Blue crabs are external brooders; eggs are attached to female's pleopods until hatching.	High	All larval stages are planktonic and occur throughout the water column.	Minimal	Juveniles are benthopelagic. Young individuals prefer estuarine habitat.	Low	Adults are demersal.	sealifebase.org; Patillo et al. (1997)

Table 5-1. Potential for Impingement and Entrainment by Four Key Life Stages of the 11 Target Fish and Invertebrate Species

Species	Scientific Name	Egg		Larvae		Juvenile		Adult		Source
		I&E Potential	Reason for Ranking	I&E Potential	Reason for Ranking	I&E Potential	Reason for Ranking	I&E Potential	Reason for Ranking	
Gulf Crab	<i>Callinectes similis</i>	Minimal	Gulf crabs are external brooders; eggs are attached to female's pleopods until hatching.	High (based on blue crab)	All larval stages are planktonic and occur throughout the water column.	Minimal	Juveniles are benthopelagic and capable swimmers. Young individuals prefer estuarine habitat.	Low	Adults are benthopelagic and capable swimmers.	sealifebase.org
Brown Shrimp	<i>Penaeus aztecus</i>	Minimal	Eggs are demersal and are released in offshore spawning grounds at depths of 46 to 450 ft.	High	Larval stages are planktonic and follow vertical diurnal migrations throughout the water column.	Low	Early juveniles enter estuarine habitats from the GOM to mature. Older juveniles migrate out into nearshore GOM but prefer shallow marsh areas and estuarine bays.	Low	Adults are demersal and capable swimmers. Low likelihood of presence near proposed water intake structure because they prefer greater depths (46 to 361 ft).	sealifebase.org; Patillo et al. (1997); GMFMC (2004)
Pink Shrimp	<i>Penaeus duorarum</i>	Low	Spawning occurs in the GOM at depths ranging from 13 to 157 ft. Eggs are demersal. The proposed depth for the intake structure is close to the upper limit recorded for egg presence.	High	Larval stages are planktonic and can be found over the continental shelf throughout the water column, with strong diurnal movements.	Low	Juveniles are commonly found at depths of <10 ft in estuarine nursery areas associated with seagrasses. Sub-adults can be found at depths of 3 to 213 ft	Low	Adults are demersal. May be present near the proposed water intake structure, but swim at speeds greater than intake velocity. Also, unlikely to be within water column due to demersal habits.	sealifebase.org; GMFMC (2004); Patillo et al. (1997)
White Shrimp	<i>Penaeus setiferus</i>	Low	Spawning occurs in nearshore marine waters at depths ranging from 30 to 112 ft. Eggs are demersal. The proposed depth for intake structure is at the upper limit recorded for egg presence.	High	Larval stages are planktonic and can be found throughout the water column.	Low	Juveniles seek out estuarine habitats over soft bottom (sand, shell) but migrate out into the GOM when they get older. Juveniles are primarily demersal.	Low	Adults are demersal. May be present near the proposed water intake structure, but can swim at speeds greater than intake velocity. Also, unlikely to be within water column due to demersal life history.	sealifebase.org; Patillo et al. (1997); GMFMC (2004)

Table 5-2. Summary of Coastal Texas Impingement Studies

Plant Name	Location	Capacity	Intake Velocity	Screen Type	Screen Size	Other Impingement/Entrainment Technology	Major Findings	Reference
Barney M. Davis Power Plant	Corpus Christi (water is withdrawn from Laguna Madre)	540 MGD	Not stated	Passavant traveling drum screens with nylon mesh	1×2 mm	Fish return	<p>-Monthly monitoring occurred from March 14, 2006 to February 21, 2007.</p> <p>-42,286 fish and 28,418 invertebrates were impinged, for a total of 70,834 organisms.</p> <p>-11 taxa comprised 92% of the impinged organisms.</p> <p>-Species impinged included spot, bay anchovy, brown shrimp, grass shrimp, blue crab, mysid shrimp, ladyfish, <i>Clupeidae</i> spp., Atlantic croaker, Gulf menhaden, and pinfish.</p> <p>-Spot were impinged in the greatest numbers, whereas bay anchovy appeared most frequently.</p> <p>-May had the highest number of impinged taxa while October had the lowest.</p> <p>-The decrease in shrimp impingement from 6:00 to 18:00 h was likely related to nocturnal activity patterns.</p> <p>-Number of impinged individuals was highest from January to March and decreased approximately 20% for each successive month from January through December.</p> <p>-The number of impinged invertebrates increased slightly in July and September.</p> <p>-Total impingement was most associated with dissolved oxygen, sampling month and sampling time.</p>	Shepherd et al. (2016)
P.H. Robinson Generating Station	Bacliff	138.6 BGD	Calculated approach velocity @ mean low water Unit 1: 1.05 f/sec Unit 2: 1.04 f/sec Unit 3: 1.14 f/sec Unit 4: 1.19 f/sec	Revolving mesh screen, square clear opening	9.5 mm (3/8 in.)	Not stated	<p>Screen samples contained 68,518 organisms and 83 species from February 1969 through March 1970.</p> <p>Gulf menhaden Entrainment: < 30 mm SL, peaked March and April 1969 and January through March 1970. Impingement: 14 to 200 mm SL, highest at 35 to 85 mm SL and peaked February to June 1969 when the number of juveniles peaked; Injury rates: 5.8%. Peak abundance had low injury rates.</p> <p>Bay anchovy Entrainment: <20 mm SL, enhanced 20 to 50 mm, peaked from May to September 1969. Impingement: 20 to 65 mm SL; 50 to 70 mm SL were impinged mostly from March to April 1969, and December 1969; Injury rates: 34.2%. Highest injury rates were observed during low abundance.</p> <p>Sea catfish Entrainment: 35 to ~50 mm SL, peaked April 1969 and September 1969. Impingement: 42 to 248 mm SL, peaked during the late summer; Injury rates: 11.6%. Highest injury rates were observed during low impingement.</p> <p>Sand seatrout Impingement: 35 to 175 mm SL, peaked May to August 1969; Injury rates: 9.6%. Months with peak impingement had low injury rates.</p> <p>Spot Entrainment: <30 mm SL and peaked in March 1969. Impingement: 28 to 142 mm SL and peaked from later summer to early winter; Injury rates: 5%.</p> <p>Atlantic croaker Entrainment: <30 mm SL, peaked during recruitment from March to April 1969 and January to March 1970. Impingement: 15 to 223 SL, highest from 30 to 65 mm and peaked February to April 1969; Injury rates: 2.6%</p> <p>Spotted seatrout Impingement: 48 to 169 mm SL peaked during the fall through winter; Injury rate: 2.6%</p> <p>Black drum Impingement: 40 to 283 mm SL, highest 40 to 84 mm SL, peaked during June; Injury rate: 4.8%</p> <p>Red drum Impingement: 41 to 94 mm SL</p> <p>Southern flounder Impingement: 29 to 272 mm SL; Injury rate: 11.7%</p>	Landry (1977) in GBNEP (1993)

Table 5-2. Summary of Coastal Texas Impingement Studies

Plant Name	Location	Capacity	Intake Velocity	Screen Type	Screen Size	Other Impingement/ Entrainment Technology	Major Findings	Reference
							<p>-81 species of fish, 23 species of crustaceans, and 1 species of mollusc were collected from April 1978 to March 1979. A total of 79,337 organisms (33,622 fish and 45,715 invertebrates) were collected during the study period.</p> <p>-The organisms impinged in this study and Landry (1977) had six species in common. For Units 1 and 2, Landry's (1977) projections were an order of magnitude higher for Gulf menhaden, sea catfish, sand seatrout, and spot. Estimates for bay anchovy and Atlantic croaker were also higher.</p> <p>-This study concluded that the estimates of total annual impingement weight for finfish between the two studies were of the same order of magnitude.</p>	Greene et al. (1980a) in GBNEP 1993
Sam Bertron Generating Station	Houston Ship Channel	241.1 BGD	Calculated approach velocity @ mean low water Unit 1: 1.05 f/sec Unit 2: 1.04 f/sec Unit 3: 1.14 f/sec Unit 4: 1.19 f/sec	Revolving mesh screen, square clear opening	9.5 mm (3/8 in.)	Not stated	<p>-479,448 fish and 132,450 invertebrates were collected. 68 species of fish, 17 species of crustaceans, and 1 species of mollusc were captured from January 12, 1978, to January 2, 1979.</p> <p>-10 species comprised >1% of the total.</p> <p>-Brown shrimp, white shrimp, and blue crab accounted for 96.2% of the impinged invertebrates.</p> <p>-Major forage species including Gulf menhaden, threadfin shad, and bay anchovy accounted for 68.3% of the projected fish impingement.</p> <p>-Other commercially or recreationally important fish impinged included sand seatrout, spotted seatrout, Atlantic croaker, red drum, and southern flounder, which made up 20.7% of all fish.</p> <p>-Two other species taken in large numbers were spot and striped mullet, which composed 6.1% of all fish.</p> <p>Impingement Results by Species (size range and peak abundance) Brown shrimp: mid-May to end of June White shrimp: end of June to end of September, November 1 to January Blue crab: 5 to 210 mm Gulf menhaden: 20 to 230 mm, November 1 to mid-December Sand seatrout: 5 to 325 mm, November 1 to January 1 Spotted seatrout: 65 to 280 mm, November 1 to end of March Atlantic croaker: 5 to 245 mm, end of March to mid-May Red drum: 40 to 380 mm, most end of January to end of February Southern flounder: 40 to 290 mm, mid-April to June 1</p>	Greene et al. (1979) in GBNEP 1993

Table 5-2. Summary of Coastal Texas Impingement Studies

Plant Name	Location	Capacity	Intake Velocity	Screen Type	Screen Size	Other Impingement/ Entrainment Technology	Major Findings	Reference
Webster Generating Station	southern Harris County on the north side of Clear Creek, 3.5 miles upstream from its mouth on Clear Lake	138.6 BGD	Max Actual velocities Unit 1: 1.48 f/sec Unit 2: 1.48 f/sec Unit 3: 2.56 f/sec	Revolving mesh screen	9.5 mm (3/8 in.)	Not stated	-62 species of fish, 1 amphibian, 13 species of crustaceans, and 1 species of mollusc were impinged from December 8, 1977, to November 28, 1978. -Brown shrimp, white shrimp, and blue crab composed 47.3% of organisms impinged. -Gulf menhaden, threadfin shad, and bay anchovy accounted for 28.7% of organisms impinged. -9 species of commercial or recreational importance were impinged, including sand seatrout, spotted seatrout, Atlantic croaker, black drum, red drum, and southern flounder. Only the Atlantic croaker made up a significant portion of the organisms impinged. -Brown shrimp were abundant in late May and early June, and again in November. -White shrimp had a minor peak in late August and early September, and a major peak from the end of November to early January. The winter peak had smaller shrimp. -Gulf menhaden were abundant in December and January and again in late November 1978. A peak of small menhaden occurred in early April. -Atlantic croaker were most abundant in spring and early summer and least abundant in late summer and fall. -10 fish taxa were taken in entrainment samples, but 4 species (bay anchovy, naked goby, Gulf menhaden, and Atlantic croaker) accounted for 98.9% of total fish. -Bay anchovy and naked goby larvae and juveniles were present from April through November 1978. -Young Gulf menhaden and Atlantic croaker were present only from February through mid-April 1978.	Greene (1980) in GBNEP (1993)
Cedar Bayou Generating Station	Baytown, Texas (withdraws water from Cedar Bayou)	Not stated	Calculated Approach Velocity and Average Low Water: Unit 1: 0.830 f/sec Unit 2: 0.830 f/sec Unit 3: 0.783 f/sec Design and Confirmed Approach Velocities at Mean Sea Level at time of SRI study: Unit 1: 1.0 f/sec Unit 2: 1.0 f/sec Unit 3: 0.5 f/sec	Revolving mesh screen, square clear opening	12.7 mm (1/2 in.) or 9.5 mm (3/8 in.) for all units	Fish pump	-9,355 fish and 2,201 crustaceans were collected at the intake screens from June 1978 through May 1979. -91% of the fish and 95% of the crustaceans were alive when collected. -The following organisms were impinged in the largest numbers during the study: Gulf menhaden, Atlantic croaker, white shrimp, blue crab, brown shrimp, bay anchovy, sand seatrout, and spot. -The recreationally- or commercially-important species (i.e., spotted seatrout, southern flounder, black drum, and red drum) composed 0.3% of the total number of organisms impinged on the intake screens. -The most-abundant organisms that were impinged and passed through the fish pump were Gulf menhaden, white shrimp, Atlantic croaker, brown shrimp, blue crab, blackcheek tonguefish, sand seatrout, bay anchovy, least puffer, and spot. -The recreationally or commercially important species (i.e., spotted seatrout, southern flounder, black drum, and red drum) made up <0.4% of the total organisms impinged on intake screens and passed through the fish pump. Size ranges (mm SL) and survival (%) immediately after impingement: Bay anchovy: 82% Gulf menhaden: 96% Sand seatrout: 32 mm to 171 mm; 88% Spotted seatrout: 84% Spot: 32 mm to 127 mm; 97% Atlantic croaker: 20 mm to 120 mm; 78% Southern flounder: 91% Black drum: 100% (1 individual) Red drum: 100% (1 individual) Least puffer: 44% Blackcheek tonguefish: 76% Blue crab: 87 mm, and 15 mm to 196 mm; 97% Brown shrimp: 45 mm to 122 mm; 95% White shrimp: 41 mm to 147 mm; 96%	Jobe et al. (1980b) in GBNEP (1993)

Table 5-2. Summary of Coastal Texas Impingement Studies

Plant Name	Location	Capacity	Intake Velocity	Screen Type	Screen Size	Other Impingement/ Entrainment Technology	Major Findings	Reference
							<p>-A total of 5,225,116 organisms were collected with 168 taxonomic groups identified, including fish, crustaceans, amphibians, and reptiles, from April 1973 to December 1980.</p> <p>-12 species of fish or crustaceans comprised more than 1% of the total number of organisms collected.</p> <p>-These species comprised approximately 93% of the total number of organisms collected.</p> <p>Impingement results (size range plus peak impingement period)</p> <p>Bay anchovy: 15 to 90 mm, March to May</p> <p>Gulf menhaden: 5 to 105 mm, November to April</p> <p>Blue crab: NA, May to September</p> <p>Sand seatrout: 20 to 285 mm, May to July</p> <p>Spotted seatrout: 30 to 285 mm, November to April</p> <p>Gizzard shad: 30 to 310 mm, April to July</p> <p>Atlantic croaker: 10 to 300 mm, February to June</p> <p>Striped mullet: 20 to 390 mm, March to April</p> <p>Grass shrimp: NA, April to July</p> <p>Southern flounder: 20 to 340 mm, May to June</p> <p>Brown shrimp: NA, May to July</p> <p>White shrimp: NA, September to December</p> <p>Black drum: 40 to 280 mm, March to November</p> <p>Atlantic threadfin: 45 to 150 mm, April to August</p> <p>Red drum: 40 to 325 mm, January to March</p> <p>Atlantic cutlassfish: 40 to 705 mm, March to July</p>	SRI (unpublished) in GBNEP (1993)
Deepwater	Houston Ship Channel	45.3 BGD (1978) 39.9 BGD (1979)	Max Present Screen Approach Velocity 0.76 f/sec (all units)	Revolving mesh screen	9.5 mm (3/8 in.)	Not stated	<p>-Revolving screens were sampled once per month in 1978 and 1979.</p> <p>-No animals were impinged June through October in both 1978 and 1979, and May 1979 when the maximum flows occurred.</p> <p>-17 species of fish and 2 species of invertebrates were captured. A total of 146 invertebrates and 327 finfish were impinged over both years. The most abundant species were blue crab, sand seatrout, Atlantic croaker, bay anchovy, and white shrimp.</p> <p>Impingement results 1979 (size range and peak abundance)</p> <p>White shrimp: 30 to 60 mm, December</p> <p>Blue crab: 10 to 60 mm, January to March, November to December</p> <p>Bay anchovy: 20 to 30 mm, November to December</p> <p>Sand seatrout: 70 mm, November</p> <p>Atlantic croaker: 20 to 60 mm, November</p>	Greene (1980) in GBNEP (1993)

Notes:

BGD= billion gallons per day
f/sec = feet per second
MGD = million gallons per day
SL = standard length

Table 5-3. Fecundity of Several Target Species

Target Species	References
Blue Crab	
<ul style="list-style-type: none"> • In south Texas, blue crab females may spawn year-round in years with mild winters, with the highest activity occurring in spring and summer. • A single female may carry one to six million eggs in her external egg mass (called a “sponge” or “berry”). • Females may produce up to eight broods per year. 	<p>Pattillo et al. (1997); Perry and McIlwain (1986); Ward (2012)</p>
White Shrimp	
<ul style="list-style-type: none"> • Females lay their eggs in offshore waters of the Gulf of Mexico from March to October (peak activity is June and July). • Females that spawn early in the spring may spawn a second time in late summer or fall, and possibly up to four times per year. • A large female is estimated to produce half a million to one million eggs during each spawning event. 	<p>Pattillo et al. (1997)</p>
Red Drum	
<ul style="list-style-type: none"> • Red drum spawning in the Gulf of Mexico occurs from mid-August to December/early January, with peaks in mid-September through October, and then declining. • The females are “batch spawners,” meaning that they ovulate and expel their eggs in two or more large batches during the course of the spawning season. • Wild females produce between 160,000 and 3,270,000 eggs per batch depending on their size, with a mean batch fecundity of 1,540,000 eggs among fish of all sizes. • In one experiment, 10 to 12 spawns per fish over 90 to 100 days were typical, with one captive fish spawning 31 times over 90 days. Another experiment reported three females spawning 52 times in 76 days, producing an estimated total of 60 million eggs. • Captive fish released about 1 million eggs per spawn during the first 45 days, dropping to 10,000 to 100,000 eggs thereafter. • The maximum-recorded spawn was 2,058,000 eggs per fish during one night. • A maximum individual annual fecundity is estimated as 30 million eggs for females weighing between 9 and 14 kg. • The total annual fecundity of a wild 75.7 cm (29.8-inch) female has been reported to be as high as 62 million eggs (measured via volumetric displacement) or 95 million eggs (measured via the gravimetric [i.e., mass] method). 	<p>Pattillo et al. (1997); Reagan (1985); Sink et al. (2018)</p>

Table 5-3. Fecundity of Several Target Species

Target Species	References
Atlantic Croaker	
<ul style="list-style-type: none"> The Atlantic croaker has a protracted spawning season in the Gulf of Mexico that stretches from September/October to March/May, with a peak in October and possibly November (note: these ranges are generic to the Gulf of Mexico, not the area around Aransas Inlet). Pattillo et al. (1997) reported fecundities for females from the Gulf of Mexico ranging between 27,000 eggs for a female measuring 136 mm SL and 1,075,000 eggs for a female measuring 318 mm SL. Lassuy (1983) reported the fecundity of a 395 mm female as 180,000 eggs (from one paper) and 41,200 eggs (from another paper). 	<p>Pattillo et al. (1997); Lassuy (1983a)</p>
Spotted Trout	
<ul style="list-style-type: none"> Spotted seatrout females are “batch spawners” capable of releasing eggs many times during the reproductive season. Spawning frequency appears to be high and is estimated to occur every 3.6 days, but this frequency is probably not sustained throughout the entire spawning season. In Texas, the spawning season extends from April to October, with spawning occurring during all these months. The percentage of females spawning at any given time is difficult to determine. It is also a challenge to estimate the fecundity of a species that spawns in batches and has a protracted spawning season. Finally, the frequency of spawning reported in the literature may cause fecundity to be poorly estimated. Having said that, a 2 lb spotted seatrout spawning eight times in a season would produce about 3 million eggs. Forty-five captive broodfish maintained at a state-operated fish hatchery in Texas spawned 251 million eggs over a 9-month period. Estimates of fecundity range from a mean of 14,000 eggs from 28.3 cm (11.14 in.) TL age I females to 1.1 million eggs for age IV females averaging 50.4 cm (19.84 in.) TL. Annual fecundity may average greater than 10 million eggs per female. 	<p>Pattillo et al. (1997); Blanchet et al. (2001)</p>
Notes:	
SL = standard length	
TL = total length	

Appendix A

Comprehensive List of Fish and
Invertebrate Species that May
Occur in the Gulf of Mexico
around the Project Area

Appendix A

The following marine taxa were included in Appendix A as taxa that may occur in the vicinity of the project area:

- All taxa identified in bottom trawl survey data collected from the Gulf States Marine Fisheries Commission via NOAA (NOAA 2022).
- All taxa identified in fisheries survey data provided by the Texas Parks and Wildlife Department (TPWD 2022).
- All state and federally threatened, potentially threatened, and endangered species known to occur in the vicinity of the project area.
- All benthic species data presented in Appendix L (Benthic Survey Report) of the Deepwater Port License Application for the Bluewater Texas Terminal Project (Bluewater Texas Terminals LLC 2021a).
- A subset of phytoplankton and zooplankton taxa from Holland et al. (1973, 1974) which are known to occur in marine and coastal areas. Holland et al. (1973, 1974) conducted phytoplankton tows in the Texas Bay systems and compiled extensive lists of the taxa identified. However, because specific locations where these taxa were caught were not provided, they were cross-referenced with a number of studies on phytoplankton and zooplankton salinity tolerance (Cervetto and Pagano 1999; Brand 1984; Gilabert 2001; Hopper 1960; Gaillard et al. 2021; Miller and Kamykowski 1986; Rai and Rajashekar 2014; Isinibilir et al. 2011; Nagasathya and Thajuddin 2008; Tundisi and Tundisi 1968) to identify species known to inhabit coastal and marine environments.
- Species from location-specific ichthyoplankton survey data subsets obtained from the Southeast Area Monitoring and Assessment Program (SEAMAP) for station B233 in the GOM and provided by NMFS in November 2022, which were not identified in the NOAA and TPWD surveys. This station covers the area that includes the proposed water intake structure and includes 186 sampling events between 1984 and 2019. Larvae classified at higher taxonomic levels (e.g., genus or family) in the SEAMAP data that also have one or more related species identified in the adult catch data sets from NOAA or TPWD are considered to be included in both the adult and ichthyoplankton survey data.

This data set includes different taxonomic groups because not all organisms could be identified down to species level. This analysis yielded 606 unique taxa of plankton, invertebrates, and vertebrates.

References

- Bluewater Texas Terminals LLC. 2021a. Appendix L: Benthic Survey Report in Deepwater Port License Application for the Bluewater SPM Project, Volume II: Environmental Evaluation.
- Brand, L.E. (1984). The salinity tolerance of forty-six marine phytoplankton isolates. *Estuarine, Coastal and Shelf Science* 18(5): 543-556.
- Cervetto, G., R. Gaudy, and M. Pagano. 1999. Influence of salinity on the distribution of *Acartia tonsa* (Copepoda, Calanoida). *Journal of Experimental Marine Biology and Ecology* 239(1): 33-45.
- Gaillard, S., D. Réveillon, C. Danthu, F.Hervé, M. Sibat, L. Carpentier, H. Hégaret, V. Séchet, and P. Hess. 2021. Effect of a short-term salinity stress on the growth, biovolume, toxins, osmolytes and metabolite profiles on three strains of the *Dinophysis acuminata*-complex (*Dinophysis cf. sacculus*). *Harmful Algae* 107, 102009.
- Gilabert, J. 2001. Seasonal plankton dynamics in a Mediterranean hypersaline coastal lagoon: the Mar Menor. *Journal of Plankton Research* 23(2): 207-218.
- Holland, J.S. 1973. A benthos and plankton study of the Corpus Christi, Copano and Aransas Bay systems. I, Report on the methods used and data collected during the period September 1972-June 1973.
- Holland, J.S. 1974. A benthos and plankton study of the Corpus Christi, Copano and Aransas Bay systems. II, Report on the data collected during the period July, 1973-April, 1974.
- Hopper, A.F. 1960. The resistance of marine zooplankton of the caribbean and South Atlantic to changes in salinity 1. *Limnology and Oceanography*, 5(1), 43-47.
- Isinibilir, M., L. Svetlichny, E. Hubareva, I.N. Yilmaz, F. Ustun, G. Belmonte, and B. Toklu-Alicli. 2011. Adaptability and vulnerability of zooplankton species in the adjacent regions of the Black and Marmara Seas. *Journal of Marine Systems*, 84(1-2), 18-27.
- Miller, R.L., and D.L. Kamykowski. 1986. Effects of temperature, salinity, irradiance and diurnal periodicity on growth and photosynthesis in the diatom *nitzschia americana*; light-saturated growth. *Journal of Phycology* 22(3): 339-348.
- Nagasathya, A., and N. Thajuddin. 2008. Diatom diversity in hypersaline environment. *Journal of Fisheries and Aquatic Science* 3(5): 328-333.
- NOAA Fisheries. 2022. DisMAP data records. Retrieved from apps-st.fisheries.noaa.gov/dismap/DisMAP.html. Accessed August 2022
- Rai, S.V., and M. Rajashekhar. 2014. Effect of pH, salinity and temperature on the growth of six species of marine phytoplankton. *Journal of Algal Biomass Utilization* 5(4): 55-59.

TPWD, Coastal Fisheries Division, Correspondence dated August 30, 2022

Tundisi, J., and T.M. Tundisi. 1968. Plankton studies in a mangrove environment: V. Salinity tolerances of some planktonic crustaceans. *Boletim do Instituto Oceanográfico* 17: 57-65.

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Sargent major	<i>Abudefduf saxatilis</i> ^g	
Gladiator box crab	<i>Acanthocarpus alexandri</i> ^a	
Scrawled cowfish	<i>Acanthostracion quadricornis</i> ^{a,b}	
NA	<i>Acartia tonsa</i> ^e	Zooplankton species
Longspine swimming crab	<i>Achelous spinicarpus</i> ^a	
Blotched swimming crab	<i>Achelous spinimanus</i> ^{a,b}	
Lined sole	<i>Achirus lineatus</i> ^b	
Gulf Sturgeon	<i>Acipenser oxyrinchus desotoi</i> ^a	T, Protected Fish (Federal)
Order anemones	<i>Actiniaria</i> ^{b,d}	
Mossy scallop	<i>Aequipecten muscosus</i> ^a	
Many-ribbed papillae jellyfish	<i>Aequorea forskalea</i> ^b	
Texas venus	<i>Agriopoma texasiana</i> ^b	
African pompano	<i>Alectis ciliaris</i> ^b	
Family snapping shrimps	<i>Alpheidae</i> ^b	
Estuarine snapping shrimp	<i>Alpheus estuariensis</i> ^b	
Sand snapping shrimp	<i>Alpheus floridanus</i> ^b	
Bigclaw snapping shrimp	<i>Alpheus heterochaelis</i> ^b	
Dotterel filefish	<i>Aluterus heudelotii</i> ^a	
Orange filefish	<i>Aluterus schoepfii</i> ^{a,b}	
Scribbled leatherjacket filefish (or Scrawled filefish)	<i>Aluterus scriptus</i> ^{a,b}	
Many-colored tellin	<i>Ameritella versicolor</i> ^d	
NA	<i>Ampelisca vadorum</i> ^d	Amphipod species
Paper scallop	<i>Amusium papyraceum</i> ^a	
Skewed ark	<i>Anadara baughmani</i> ^a	
Blood ark	<i>Anadara ovalis</i> ^b	
Stilt spider crab	<i>Anasimus latus</i> ^a	
Sea hare - unidentified	<i>Anaspidea</i> ^b	
Striped anchovy	<i>Anchoa hepsetus</i> ^{a,b}	
Dusky anchovy	<i>Anchoa lyolepis</i> ^b	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Bay anchovy	<i>Anchoa mitchilli</i> ^{a,b}	
Three-eye flounder	<i>Ancylopsetta dilecta</i> ^a	
Ocellated flounder	<i>Ancylopsetta ommata</i> ^{a,b}	
Ocellated frogfish	<i>Antennarius ocellatus</i> ^a	
Singlespot frogfish	<i>Antennarius radiosus</i> ^{a,b}	
Striated frogfish	<i>Antennarius striatus</i> ^a	
Sea star	<i>Anthenoides peircei</i> ^a	
Fangtooth snake-eel	<i>Aplatophis chauliodus</i> ^g	
Mottled sea hare	<i>Aplysia fasciata</i> ^b	
Bigtooth cardinalfish	<i>Apogon affinis</i> ^a	
Bridle cardinalfish	<i>Apogon aurolineatus</i> ^a	
Twospot cardinalfish	<i>Apogon pseudomaculatus</i> ^a	
Sawcheek cardinalfish	<i>Apogon quadrisquamatus</i> ^a	
Purple-spined sea urchin	<i>Arbacia punctulata</i> ^a	
Turkey wing	<i>Arca zebra</i> ^a	
Common sundial	<i>Architectonica perspectiva</i> ^b	
Sheepshead	<i>Archosargus probatocephalus</i> ^b	
Speckled swimming crab	<i>Arenaeus cribrarius</i> ^{a,b}	
Calico scallop	<i>Argopecten gibbus</i> ^a	
Western bay scallop	<i>Argopectin irradians amplicostatus</i> ^b	
NA	<i>Ariomma</i> ^g	Genus of deepwater, marine ray-finned fishes
Hardhead catfish	<i>Ariopsis felis</i> ^{a,b}	
Brazilian armina	<i>Armina mulleri</i> ^b	
Sea squirt	<i>Asciacea</i> ^b	
Class starfishes	<i>Asteroidea</i> ^b	
Brittle star	<i>Asteroporpa annulata</i> ^a	
Bronze cardinalfish	<i>Astrapogon alutus</i> ^a	
Royal sea star	<i>Astropecten articulatus</i> ^a	
Sea star species	<i>Astropecten cingulatus</i> ^a	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Two-spined star fish	<i>Astropecten duplicatus</i> ^{a,b}	
Giant basket star	<i>Astrophyton muricatum</i> ^a	
Southern stargazer	<i>Astroscopus y-graecum</i> ^b	
Sawtooth penshell	<i>Atrina serrata</i> ^a	
Moon jelly	<i>Aurelia aurita</i> ^b	
NA	<i>Auxis</i> ^g	Frigate tuna genus
Gafftopsail catfish	<i>Bagre marinus</i> ^{a,b}	
Silver perch	<i>Bairdiella chrysoura</i> ^{a,b}	
sei whale	<i>Balaenoptera borealis</i> ^c	E (Federal), E (TX State)
blue whale	<i>Balaenoptera musculus</i> ^c	E (Federal), E (TX State)
Gulf of Mexico Bryde's whale	<i>Balaenoptera ricei</i> ^c	E (Federal), E (TX State)
Gray triggerfish	<i>Balistes capriscus</i> ^{a,b}	
Sooty eel	<i>Bascanichthys bascanium</i> ^b	
Yellowtail bass	<i>Bathyanthias mexicanus</i> ^a	
Horned searobin	<i>Bellator militaris</i> ^a	
NA	<i>Biddulphia</i> sp. ^f	Phytoplankton species
Ragged goby	<i>Bollmannia communis</i> ^{a,b}	
Antenna codlet	<i>Bregmaceros atlanticus</i> ^a	
Finescale menhaden	<i>Brevoortia gunteri</i> ^b	
Gulf menhaden	<i>Brevoortia patronus</i> ^{a,b}	
Atlantic menhaden	<i>Brevoortia tyrannus</i> ^g	
Bearded brotula	<i>Brotula barbata</i> ^{a,b}	
Pearwhelk	<i>Busycotypus spiratus</i> ^b	
Grass porgy	<i>Calamus arctifrons</i> ^a	
Jolthead porgy	<i>Calamus bajonado</i> ^a	
Whitebone porgy	<i>Calamus leucosteus</i> ^a	
Knobbed porgy	<i>Calamus nodosus</i> ^a	
Sheepshead porgy	<i>Calamus penna</i> ^a	
Littlehead porgy	<i>Calamus proridens</i> ^a	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Flame box crab	<i>Calappa flammea</i> ^{a,b}	
Yellow box crab	<i>Calappa sulcata</i> ^{a,b}	
Hermit anemone	<i>Calliactis tricolor</i> ^a	
Blue crab	<i>Callinectes sapidus</i> ^{a,b}	
Lesser blue crab	<i>Callinectes similis</i> ^{a,b}	
Cancellate cantharus	<i>Cantharus cancellarius</i> ^{a,b}	
Orangespotted filefish	<i>Cantherhines pullus</i> ^b	
Rough triggerfish	<i>Canthidermis maculatus</i> ^g	
Caribbean sharpnose-puffer	<i>Canthigaster rostrata</i> ^a	
Family jacks	<i>Carangidae</i> ^b	
Remora	<i>Carangiformes</i> ^b	
Blue runner	<i>Caranx crysos</i> ^{a,b}	
Crevalle jack	<i>Caranx hippos</i> ^{a,b}	
Blacknose shark	<i>Carcharhinus acronotus</i> ^a	
Blacktip shark	<i>Carcharhinus limbatus</i> ^b	
Oceanic Whitetip Shark	<i>Carcharhinus longimanus</i> ^{a,b}	T, Protected Fish (Federal), T (TX State)
Loggerhead Sea Turtle	<i>Caretta caretta</i> ^c	T (Federal), T (TX State)
NA	<i>Caryocorbula</i> ^d	Saltwater clam species
Blackline tilefish	<i>Caulolatilus cyanops</i> ^a	
Anchor tilefish	<i>Caulolatilus intermedius</i> ^a	
Bank sea bass	<i>Centropristis ocyurus</i> ^a	
Rock sea bass	<i>Centropristis philadelphica</i> ^{a,b}	
Black sea bass	<i>Centropristis striata</i> ^a	
NA	<i>Ceratioidea</i> ^g	Deep-sea angler fish family
NA	<i>Ceratioidei</i> ^g	Deep-sea angler fish suborder
NA	<i>Ceratium furca</i> ^e	Phytoplankton species
Atlantic spadefish	<i>Chaetodipterus faber</i> ^{a,b}	
Spotfin butterflyfish	<i>Chaetodon ocellatus</i> ^a	
Reef butterflyfish	<i>Chaetodon sedentarius</i> ^a	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Green Sea Turtle	<i>Chelonia mydas</i> ^c	T (Federal), T (TX State)
Flowery lace murex	<i>Chicoreus florifer-dilectus</i> ^a	
Striped burrfish	<i>Chilomycterus schoepfii</i> ^{a,b}	
Unknown bivalve	<i>Chione clenchii</i> ^a	Species <i>Chione clenchii</i> could not be verified but this record appears to be for a bivalve belonging to the <i>Chione</i> genus. Naming conventions likely have changed since data were collected.
Florida cross-barred venus	<i>Chione elevata</i> ^b	
Sea wasp	<i>Chironex fleckeri</i> ^b	
Atlantic bumper	<i>Chloroscombrus chrysurus</i> ^{a,b}	
Yellowtail reef fish	<i>Chromis enchrysurus</i> ^a	
Sea nettle	<i>Chrysaora quinquecirrha</i> ^{a,b}	
Horned whiff	<i>Citharichthys cornutus</i> ^a	
Anglefin whiff	<i>Citharichthys gymnorhinus</i> ^a	
Spotted whiff	<i>Citharichthys macrops</i> ^{a,b}	
Bay whiff	<i>Citharichthys spilopterus</i> ^{a,b}	
Thin stripe hermit	<i>Clibanarius vittatus</i> ^b	
Menhaden and Herrings- unidentified	<i>Clupeidae</i> ^b	
Robust crab	<i>Collodes robustus</i> ^a	
Barred grunt	<i>Conodon nobilis</i> ^b	
NA	<i>Corycaeus sp.</i> ^e	Zooplankton species
Common dolphinfish	<i>Coryphaena hippurus</i> ^g	
NA	<i>Coryphaena</i> ^g	Dolphinfish family
NA	<i>Cossura soyeri</i> ^d	Polychaete species
Bluelip parrotfish	<i>Cryptotomus roseus</i> ^a	
Darter goby	<i>Ctenogobius boleosoma</i> ^b	
Four-tentacle box jelly	<i>Cubozoa</i> ^b	
Mexican flounder	<i>Cyclopsetta chittendeni</i> ^{a,b}	
Spotfin flounder	<i>Cyclopsetta fimbriata</i> ^{a,b}	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
NA	<i>Cyclotella</i> sp. ^f	Phytoplankton species
NA	<i>Cyclothone</i> ^g	Bristlefish genus
Sand seatrout	<i>Cynoscion arenarius</i> ^b	
Spotted seatrout	<i>Cynoscion nebulosus</i> ^b	
Silver seatrout	<i>Cynoscion nothus</i> ^b	
Flamingo tongue	<i>Cyphoma gibbosum</i> ^b	
Intermediate cyphoma	<i>Cyphoma intermedium</i> ^b	
Yellow prickly cockle	<i>Dallocardia muricata</i> ^b	
Bareye hermit	<i>Dardanus fucosus</i> ^a	
Red brocade hermit	<i>Dardanus insignis</i> ^a	
Atlantic stingray	<i>Dasyatis sabina</i> ^b	
Bluntnose stingray	<i>Dasyatis say</i> ^b	
Round scad	<i>Decapterus punctatus</i> ^{a,b}	
Red hogfish	<i>Decodon puellaris</i> ^a	
Leatherback Sea Turtle	<i>Dermochelys coriacea</i> ^c	E (Federal), E (TX State)
NA	<i>Diaphus</i> ^g	Lanternfish genus
Irish pompano	<i>Diapterus auratus</i> ^b	
Atlantic giant cockle	<i>Dinocardium robustum</i> ^b	
NA	<i>Dinophysis</i> sp. ^f	Phytoplankton species
Dwarf sand perch	<i>Diplectrum bivittatum</i> ^{a,b}	
Sand perch	<i>Diplectrum formosum</i> ^{a,b}	
Atlantic diplodon	<i>Diplodonta punctata</i> ^d	
Spottail seabream	<i>Diplodus holbrookii</i> ^a	
Atlantic distorsio	<i>Distorsio clathrata</i> ^{a,b}	
NA	<i>Ditylum brightwellii</i> ^e	Phytoplankton species
Threadfin shad	<i>Dorosoma petenense</i> ^b	
Hairy sponge crab	<i>Dromidia antillensis</i> ^{a,b}	
Gulf grassflat crab	<i>Dyspanopeus texanus</i> ^b	
Sharksucker	<i>Echeneis naucrates</i> ^a	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Whitefin sharksucker	<i>Echeneis neucratoides</i> ^a	
NA	<i>Echinodermata</i> ^d	Echinoderm species
Spotted spoon-nose eel	<i>Echiophis intertinctus</i> ^a	
Rainbow runner	<i>Elagatis bipinnulatus</i> ^g	
Ladyfish	<i>Elopidae</i> ^b	
Puerto Rican sand crab	<i>Emerita portoricensis</i> ^b	
Beach mole crab	<i>Emerita</i> spp. ^b	
Sand dollar	<i>Encope aberrans</i> ^a	
Notched sand dollar	<i>Encope michelini</i> ^a	
Family anchovies	<i>Engraulidae</i> ^b	
Spiny flounder	<i>Engyophrys senta</i> ^a	
Red grouper	<i>Epinephelus morio</i> ^a	
Nassau Grouper	<i>Epinephelus striatus</i> ^a	T, Protected Fish (Federal)
Jackknife-fish	<i>Equetus lanceolatus</i> ^a	
Hawksbill Sea Turtle	<i>Eretmochelys imbricata</i> ^c	E (Federal), E (TX State)
Broadback sumo crab	<i>Ethusa microphthalma</i> ^a	
Fringed flounder	<i>Etropus crossotus</i> ^{a,b}	
Shelf flounder	<i>Etropus cyclosquamus</i> ^a	
Smallmouth flounder	<i>Etropus microstomus</i> ^g	
Gray flounder	<i>Etropus rimosus</i> ^a	
Round herring	<i>Etrumeus teres</i> ^{a,b}	
North Atlantic right whale	<i>Eubalaena glacialis</i> ^c	E (Federal), E (TX State)
NA	<i>Eucalanus</i> sp. ^e	Zooplankton species
Slate pencil urchin	<i>Eucidaris tribuloides</i> ^a	
Silver mojarra (or spotfin mojarra)	<i>Eucinostomus argenteus</i> ^{a,b}	
Silver jenny	<i>Eucinostomus gula</i> ^{a,b}	
Tidewater mojarra	<i>Eucinostomus harengulus</i> ^a	
Flagfin mojarra	<i>Eucinostomus melanopterus</i> ^b	
NA	<i>Eudorella</i> ^d	Species of marine hooded shrimp

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Craggy bathyal crab	<i>Euphosynoplax clausa</i> ^a	
Little tunny	<i>Euthynnus alletteratus</i> ^b	
Redleg humpback shrimp	<i>Exhippolysmata oplophoroides</i> ^b	
NA	<i>Exocoetidae</i> ^g	Flying fish family
Pink shrimp	<i>Farfantepenaeus duorarum</i> ^b	
Atlantic figsnail	<i>Ficus communis</i> ^a	
Red cornetfish	<i>Fistularia petimba</i> ^a	
NA	<i>Gadiformes</i> ^g	Cod order
Shrimp flounder	<i>Gastropsetta frontalis</i> ^a	
Lesser mantis shrimp	<i>Gibbesia neglecta</i> ^b	
Short-finned pilot whale	<i>Globicephala macrorhynchus</i> ^a	MMPA Protected (Federal), T (TX State)
NA	<i>Glycinde multidentis</i> ^d	Polychaete species
Skilletfish	<i>Gobiesox strumosus</i> ^a	
Family gobies	<i>Gobiidae</i> ^b	
Highfin goby	<i>Gobionellus oceanicus</i> ^b	
Naked goby	<i>Gobiosoma bosc</i> ^b	
Code goby	<i>Gobiosoma robustum</i> ^b	
Giant sunfish	<i>Goniaster tessellatus</i> ^a	
Split-Thumb mantis shrimp	<i>Gonodactylus bredini</i> ^a	
NA	<i>Gonostomatidae</i> ^g	Bristlemouth family
Naked sole	<i>Gymnachirus melas</i> ^a	
Fringed sole	<i>Gymnachirus texae</i> ^{a,b}	
Blacktail moray	<i>Gymnothorax kolpos</i> ^a	
Blackedge moray	<i>Gymnothorax nigromarginatus</i> ^{a,b}	
Honeycomb moray	<i>Gymnothorax saxicola</i> ^a	
Smooth butterfly ray	<i>Gymnura micrura</i> ^b	
Tomtate	<i>Haemulon aurolineatum</i> ^a	
White grunt	<i>Haemulon plumieri</i> ^a	
Striped grunt	<i>Haemulon striatum</i> ^a	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Slippery dick	<i>Halichoeres bivittatus</i> ^b	
Pancake batfish	<i>Halieutichthys aculeatus</i> ^{a,b}	
Scaled sardine	<i>Harengula jaguana</i> ^{a,b}	
Bluntnose jack	<i>Hemicaranx amblyrhynchus</i> ^{a,b}	
NA	<i>Hemiramphidae</i> ^g	Halfbeaks family
Giant mantis shrimp	<i>Hemisquilla ensigera</i> ^b	
Calico box crab	<i>Hepatus epheliticus</i> ^{a,b}	
Bearded fireworms	<i>Hermodice carunculata</i> ^a	
Smooth elbow crab	<i>Heterocrypta granulata</i> ^b	
Lined seahorse	<i>Hippocampus erectus</i> ^{a,b}	
Dwarf seahorse	<i>Hippocampus zosterae</i> ^b	
Family elongate squids	<i>Histioteuthidae</i> ^b	
Sargassumfish	<i>Histrio histrio</i> ^b	
Blue angelfish	<i>Holacanthus bermudensis</i> ^a	
Deepwater squirrelfish	<i>Holocentrus bullisi</i> ^a	
Sea cucumber	<i>Holothuroidea</i> ^b	
Blacktail pikeconger	<i>Hoplunnis diomediana</i> ^a	
Freckled pike-conger	<i>Hoplunnis macrura</i> ^a	
Southern stingray	<i>Hypanus americanus</i> ^b	
NA	<i>Hyperia sp.</i> ^e	Zooplankton species
Warsaw grouper	<i>Hyporthodus nigrinus</i> ^b	
Feather blenny	<i>Hypsoblennius hentz</i> ^b	
NA	<i>Iliacantha liodactylus</i> ^a	Species of purse crab
Longfinger purse crab	<i>Iliacantha subglobosa</i> ^a	
Chocolate chip sea cucumber	<i>Isostichopus badionotus</i> ^a	
Indo-Pacific sailfish	<i>Istiophorus platypterus</i> ^g	
shortfin mako shark	<i>Isurus oxyrinchus</i> ^b	Candidate (Federal), T (TX State)
Lancer stargazer	<i>Kathetostoma albigutta</i> ^a	
Skipjack tuna	<i>Katsuwonus pelamis</i> ^g	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Pygmy sperm whale	<i>Kogia breviceps</i> ^{a,b}	MMPA Protected (Federal), T (TX State)
Dwarf sperm whale	<i>Kogia simus</i> ^{a,b}	MMPA Protected (Federal), T (TX State)
NA	<i>Kyphosus</i> ^g	Sea chub genus
NA	<i>Labidocera acutifrons</i> ^e	Zooplankton species
NA	<i>Labridae</i> ^g	Wrasse family
Hogfish	<i>Lachnolaimus maximus</i> ^a	
Honeycomb cowfish	<i>Lactophrys polygonia</i> ^a	
Eggcockle	<i>Laevicardium laevigatum</i> ^a	
Yellow eggcockle	<i>Laevicardium mortoni</i> ^a	
Smooth puffer	<i>Lagocephalus laevigatus</i> ^{a,b}	
Pinfish	<i>Lagodon rhomboides</i> ^{a,b}	
Banded drum	<i>Larimus fasciatus</i> ^{a,b}	
Brown grass shrimp	<i>Leander tenuicornis</i> ^b	
White elbow crab	<i>Leiolambrus nitidus</i> ^{a,b}	
Spot	<i>Leiostomus xanthurus</i> ^{a,b}	
Kemp's Ridley Sea Turtle	<i>Lepidochelys kempii</i> ^c	E (Federal), E (TX State)
Blackedge cusk-eel	<i>Lepophidium brevibarbe</i> ^{a,b}	
Mottled cusk-eel	<i>Lepophidium jeannae</i> ^a	
White synapta	<i>Leptosynapta tenuis</i> ^d	
NA	<i>Levinsenia gracilis</i> ^d	Polychaete species
Longnose spider crab	<i>Libinia dubia</i> ^b	
Portly spider crab	<i>Libinia emarginata</i> ^{a,b}	
Clenches thick-ringed venus	<i>Lirophora clenchi</i> ^b	
Northern white shrimp	<i>Litopenaeus setiferus</i> ^{a,b}	
Areolated hairy crab	<i>Lobopilumnus agassizii</i> ^a	
Tripletail	<i>Lobotes surinamensis</i> ^g	
Longfin inshore squid	<i>Loligo pealeii</i> ^{a,b}	
Slender inshore squid	<i>Loligo pleii</i> ^{a,b}	
Atlantic brief squid	<i>Lolliguncula brevis</i> ^{a,b}	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Swordtail jawfish	<i>Lonchopisthus micrognathus</i> ^a	
Banded sea star	<i>Luidia alternata</i> ^{a,b}	
Lined sea star (or striped sea star)	<i>Luidia clathrata</i> ^{a,b}	
Mutton snapper	<i>Lutjanus analis</i> ^g	
Red snapper	<i>Lutjanus campechanus</i> ^{a,b}	
Gray snapper	<i>Lutjanus griseus</i> ^a	
Lane snapper	<i>Lutjanus synagris</i> ^{a,b}	
Peppermint shrimp	<i>Lysmata boggess</i> ^b	
Green sea urchin	<i>Lytechinus variegatus</i> ^a	
Short macoma	<i>Macoma brevifrons</i> ^a	
Delta macoma	<i>Macoma pulleyi</i> ^a	
Spongy decorator crab	<i>Macrocoeloma trispinosum</i> ^a	
NA	<i>Magelona uebelackerae</i> ^d	Polychaete species
NA	<i>Maldanidae</i> ^d	Polychaete species
NA	<i>Malmgreniella taylori</i> ^d	Polychaete species
Giant Manta Ray	<i>Manta birostris</i> ^a	T, Protected Fish (Federal)
NA	<i>Mediomastus</i> ^d	Polychaete species
humpback whale	<i>Megaptera novaeangliae</i> ^c	E (Federal)
Five-holed sand dollar	<i>Mellita quinquiesperforata</i> ^b	
Rough silverside	<i>Membras martinica</i> ^b	
Inland silverside	<i>Menidia beryllina</i> ^b	
Silverside - unidentified	<i>Menidia sp.</i> ^b	
Gulf stone crab	<i>Menippe adina</i> ^b	
Southern kingfish	<i>Menticirrhus americanus</i> ^{a,b}	
Gulf kingfish	<i>Menticirrhus littoralis</i> ^b	
Texas quahog	<i>Mercenaria texana</i> ^b	
Salmon shrimp	<i>Mesopenaeus tropicalis</i> ^a	
Gervais beaked whale	<i>Mesoplodon europaeus</i> ^a	MMPA Protected (Federal), T (TX State)
Caribbean velvet shrimp	<i>Metapenaeopsis goodei</i> ^a	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
False arrow crab	<i>Metoporphaphis calcarata</i> ^{a,b}	
Atlantic croaker	<i>Micropogonias undulatus</i> ^{a,b}	
Red ridged clinging crab	<i>Mithrax forceps</i> ^a	
Coral clinging crab	<i>Mithrax hispidus</i> ^a	
Shaggy clinging crab	<i>Mithrax pleuracanthus</i> ^a	
Fringed filefish	<i>Monacanthus ciliatus</i> ^a	
Pygmy filefish	<i>Monacanthus setifer</i> ^g	
NA	<i>Moringuidae</i> ^g	Spaghetti eel, worm eel family
Striped mullet	<i>Mugil cephalus</i> ^b	
White mullet	<i>Mugil curema</i> ^b	
Red goatfish	<i>Mullus auratus</i> ^{a,b}	
NA	<i>Munida forceps</i> ^a	Species of squat lobster
Common squat lobster	<i>Munida pusilla</i> ^a	
Giant eastern murex	<i>Muricanthus fulvescens</i> ^a	
Smooth dogfish	<i>Mustelus canis</i> ^a	
Gag	<i>Mycteroperca microlepis</i> ^a	
Scamp	<i>Mycteroperca phenax</i> ^a	
NA	<i>Myctophidae</i> ^g	Lanternfish family
NA	<i>Myrophinae</i> ^g	Worm eel subfamily
Speckled worm-eel	<i>Myrophis punctatus</i> ^g	
Fivespine purse crab	<i>Myropsis quinquespinosa</i> ^a	
Batfish - unidentified	NA ^b	
Lesser electric ray	<i>Narcine brasiliensis</i> ^{a,b}	
NA	<i>Narcissia trigonaria</i> ^a	Echinoderm/sea star species
Moonsnail - unidentified	<i>Naticidae</i> ^b	
Twospot brotula	<i>Neobythites gilli</i> ^a	
Spinycheek scorpionfish	<i>Neomerinthe hemingwayi</i> ^a	
NA	<i>Nephtys incisa</i> ^d	Polychaete species
NA	<i>Nettastomatidae</i> ^g	Duckbilled eels family

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
False shark eye	<i>Neverita delessertiana</i> ^b	
Shark eye	<i>Neverita duplicata</i> ^b	
Emerald parrotfish	<i>Nicholsina usta</i> ^a	
NA	<i>Nitzschia americana</i> ^e	Phytoplankton species
NA	<i>Nitzschia closterium</i> ^e	Phytoplankton species
Ponderous ark	<i>Noetia ponderosa</i> ^b	
NA	<i>Nostoc sp.</i> ^e	Phytoplankton species
NA	<i>Notomastus</i> ^d	Polychaete species
Order nudibranchs and sea slugs	<i>Nudibranchia</i> ^b	
Pygmy octopus	<i>Octopus joubini</i> ^a	
Common octopus	<i>Octopus vulgaris</i> ^{a,b}	
Family batfishes	<i>Ogcocephalidae</i> ^b	
Longnose batfish	<i>Ogcocephalus corniger</i> ^a	
Slantbrow batfish	<i>Ogcocephalus declivirostris</i> ^a	
Spotted batfish	<i>Ogcocephalus pantostictus</i> ^{a,b}	
Roughback batfish	<i>Ogcocephalus parvus</i> ^{a,b}	
Polka-dot batfish	<i>Ogcocephalus radiatus</i> ^{a,b}	
NA	<i>Oikopleura sp.</i> ^e	Zooplankton species
NA	<i>Oithona nana</i> ^f	Zooplankton species
Leatherjack	<i>Oligoplites saurus</i> ^b	
Lettered olive	<i>Oliva sayana</i> ^b	
NA	<i>Ophichthidae</i> ^g	Snake eel family
NA	<i>Ophichthinae</i> ^g	Snake eel subfamily
Shrimp eel	<i>Ophichthus gomesii</i> ^{a,b}	
Blackpored eel	<i>Ophichthus melanoporus</i> ^g	
Palespotted eel	<i>Ophichthus puncticeps</i> ^{a,b}	
King snake eel	<i>Ophichthus rex</i> ^g	
NA	<i>Ophichthus</i> ^g	Snake eel genus
Longnose cusk-eel	<i>Ophidion beani</i> ^a	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Blotched cusk-eel	<i>Ophidion grayi</i> ^{a,b}	
Bank cusk-eel	<i>Ophidion holbrookii</i> ^a	
Mooneye cusk-eel	<i>Ophidion selenops</i> ^a	
Crested cusk-eel	<i>Ophidion welshi</i> ^{a,b}	
Harlequin brittle star	<i>Ophioderma appressa</i> ^a	
Brittle star	<i>Ophioderma brevispinum</i> ^a	
Elegant brittle star	<i>Ophiolepis elegans</i> ^a	
Angular brittle star	<i>Ophiothrix angulata</i> ^a	
Class brittle stars	<i>Ophiuroidea</i> ^b	
Atlantic thread herring	<i>Opisthonema oglinum</i> ^{a,b}	
Beach flea	<i>Orchestia</i> spp. ^b	
Killer whale	<i>Orcinus orca</i> ^a	MMPA Protected (Federal), T (TX State)
Cushioned star	<i>Oreaster reticulatus</i> ^a	
Pigfish	<i>Orthopristis chrysoptera</i> ^{a,b}	
NA	<i>Ostraciidae</i> ^g	Boxfish family
Polka-dot cusk-eel	<i>Otophidium omostigma</i> ^a	
Florida lady crab	<i>Ovalipes floridanus</i> ^{a,b}	
NA	<i>Oxydromus obscurus</i> ^d	Polychaete species
Red porgy	<i>Pagrus pagrus</i> ^a	
Family right-handed hermit crabs	<i>Paguridae</i> ^b	
Blue-eyed hermit	<i>Paguristes sericeus</i> ^a	
Hermit crab	<i>Paguristes triangulatus</i> ^a	
Hermit crab	<i>Pagurus bullisi</i> ^a	
Dimpled hermit	<i>Pagurus impressus</i> ^b	
Longwrist hermit	<i>Pagurus longicarpus</i> ^b	
Flatclaw hermit	<i>Pagurus pollicaris</i> ^b	
Grass shrimp - unidentified	<i>Palaemonetes</i> ^b	
Labile stilt crab	<i>Palicus alternatus</i> ^a	
Oystershell mud crab	<i>Panopeus simpsoni</i> ^b	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Seaweed blenny	<i>Parablennius marmoratus</i> ^a	
Margintail conger	<i>Paraconger caudilimbatus</i> ^a	
Gulf flounder	<i>Paralichthys albigutta</i> ^{a,b}	
Southern flounder	<i>Paralichthys lethostigma</i> ^{a,b}	
Broad flounder	<i>Paralichthys squamilentus</i> ^a	
Rose shrimp	<i>Parapenaeus politus</i> ^a	
NA	<i>Paraprionospio pinnata</i> ^d	Polychaete species
Blackbar drum	<i>Pareques iwamotoi</i> ^a	
Cubbyu	<i>Pareques umbrosus</i> ^a	
Elbow crab	<i>Parthenope agonus</i> ^a	
Elbow crab	<i>Parthenope fraterculus</i> ^a	
Ravenel scallop	<i>Pecten ravenelli</i> ^a	
NA	<i>Pectinaria gouldii</i> ^d	Polychaete species
Family penaeid shrimps	<i>Penaeidae</i> ^b	
Brown shrimp	<i>Penaeus aztecus</i> ^{a,b}	
Northern pink shrimp	<i>Penaeus duorarum</i> ^a	
Giant hermit	<i>Pentrochirus diogenes</i> ^{a,b}	
Gulf butterfish	<i>Peprilus burti</i> ^{a,b}	
Harvestfish	<i>Peprilus paru</i> ^{a,b}	
Slender searobin	<i>Peristedion gracile</i> ^a	
Pink purse crab	<i>Persephona crinita</i> ^{a,b}	
Mottled purse crab	<i>Persephona mediterranea</i> ^{a,b}	
Green porcelain crab	<i>Petrolisthes armatus</i> ^b	
Sponge cardinalfish	<i>Phaeoptyx xenus</i> ^a	
Scotch bonnet	<i>Phalium granulatum</i> ^b	
Sperm whale	<i>Physeter macrocephalus</i> ^c	E (Federal), E (TX State)
Hakeling	<i>Physiculus fulvus</i> ^a	
Spineback hairy crab	<i>Pilumnus sayi</i> ^a	
Family pea crabs	<i>Pinnotheridae</i> ^b	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Schwengel pitar	<i>Pitar cordatus</i> ^a	
Bladetooth elbow crab	<i>Platylambrus granulata</i> ^a	
Shrimp	<i>Plesionika longicauda</i> ^a	
Shortfinger neck crab	<i>Podochela sidneyi</i> ^{a,b}	
Sailfin molly	<i>Poecilia latipinna</i> ^b	
Black drum	<i>Pogonias cromis</i> ^b	
Atlantic threadfin	<i>Polydactylus octonemus</i> ^b	
White giant-turris	<i>Polystira albida</i> ^a	
Delicate giant-turris	<i>Polystira tellea</i> ^a	
Gray angelfish	<i>Pomacanthus arcuatus</i> ^a	
Cocao damselfish	<i>Pomacentrus variabilis</i> ^a	
Bluefish	<i>Pomatomus saltatrix</i> ^{a,b}	
Longspine scorpionfish	<i>Pontinus longispinis</i> ^a	
Spotted porcelain crab	<i>Porcellana sayana</i> ^{a,b}	
Striped porcelain crab	<i>Porcellana sigsbeiana</i> ^a	
Atlantic midshipman	<i>Porichthys plectrodon</i> ^{a,b}	
Phylum Sponges	<i>Porifera</i> ^b	
Family mud crabs and swimming crabs	<i>Portunidae</i> ^b	
Iridescent swimming crab	<i>Portunus gibbesii</i> ^{a,b}	
Redhair swimming crab	<i>Portunus ordwayii</i> ^a	
Sargassum swimming crab	<i>Portunus sayi</i> ^{a,b}	
Atlantic bigeye	<i>Priacanthus arenatus</i> ^a	
Spiny searobin	<i>Prionotus alatus</i> ^a	
Bigeye searobin	<i>Prionotus longispinosus</i> ^{a,b}	
Gulf of Mexico barred searobin	<i>Prionotus martis</i> ^a	
Bandtail searobin	<i>Prionotus ophryas</i> ^{a,b}	
Mexican searobin	<i>Prionotus paralatus</i> ^a	
Bluespotted searobin	<i>Prionotus roseus</i> ^{a,b}	
Blackfin searobin (also Blackwing searobin)	<i>Prionotus rubio</i> ^{a,b}	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Leopard searobin	<i>Prionotus scitulus</i> ^{a,b}	
Shortwing searobin	<i>Prionotus stearnsi</i> ^a	
Bighead searobin	<i>Prionotus tribulus</i> ^{a,b}	
Short bigeye	<i>Pristigenys alta</i> ^a	
Wenchman	<i>Pristipomoides aquilonaris</i> ^{a,b}	
Smalltooth Sawfish	<i>Pristis pectinata</i> ^a	E, Protected Fish (Federal)
Largetooth Sawfish	<i>Pristis pristis</i> ^a	E, Protected Fish (Federal)
NA	<i>Prorocentrum micans</i> ^f	Phytoplankton species
NA	<i>Psenes</i> ^g	Driftfishes genus
Rough rubble crab	<i>Pseudomedeus agassizii</i> ^a	
Diminutive worm eel	<i>Pseudomyrophis fugesae</i> ^g	
False killer whale	<i>Pseudorca crassidens</i> ^a	E (Federal), T (TX State)
Flecked squareback crab	<i>Pseudorhombila quadridentata</i> ^a	
Spotted goatfish	<i>Pseudupeneus maculatus</i> ^a	
Atlantic wing-oyster	<i>Pteria colymbus</i> ^a	
Red lionfish	<i>Pterois volitans</i> ^a	
Cobia	<i>Rachycentron canadum</i> ^b	
Clearnose skate	<i>Raja eglanteria</i> ^a	
Roundel skate	<i>Raja texana</i> ^{a,b}	
Gulf frog crab	<i>Raninoides louisianensis</i> ^{a,b}	
Sea pansy	<i>Renilla mulleri</i> ^{a,b}	
Atlantic guitarfish	<i>Rhinobatos lentiginosus</i> ^a	
Cownose ray	<i>Rhinoptera bonasus</i> ^{a,b}	
Harris mud crab	<i>Rhithropanopeus harrisi</i> ^d	
Atlantic sharpnose shark	<i>Rhizoprionodon terraenovae</i> ^{a,b}	
Vermilion snapper	<i>Rhomboplites aurorubens</i> ^a	
Mushroom jellyfish	<i>Rhopilema verrilli</i> ^b	
Yellow conger	<i>Rhynchoconger flavus</i> ^{a,b}	
Roughneck shrimp	<i>Rimapenaeus constrictus</i> ^b	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Rimapenaeid shrimp - unidentified	<i>Rimapenaeus</i> spp. ^b	
Benthic bobtail squid	<i>Rossia</i> spp. ^a	
Freckled soapfish	<i>Rypticus bistrispinus</i> ^a	
Whitespotted soapfish	<i>Rypticus maculatus</i> ^a	
NA	<i>Sagitta</i> sp. ^e	Zooplankton species
Spanish sardine	<i>Sardinella aurita</i> ^{a,b}	
Largescale lizardfish	<i>Saurida brasiliensis</i> ^{a,b}	
Smallscale lizardfish	<i>Saurida caribbaea</i> ^b	
Shortjaw lizardfish	<i>Saurida normani</i> ^a	
Seatrout - unidentified	<i>Sciaenidae</i> ^b	
Red Drum	<i>Sciaenops ocellatus</i> ^b	
NA	<i>Scoletoma verrilli</i> ^d	Polychaete species
King mackerel	<i>Scomberomorus cavalla</i> ^{a,b}	
Spanish mackerel	<i>Scomberomorus maculatus</i> ^{a,b}	
Royal bonnet	<i>Sconsia striata</i> ^a	
Longfin scorpionfish	<i>Scorpaena agassizii</i> ^a	
Barbfish	<i>Scorpaena brasiliensis</i> ^{a,b}	
Smoothhead scorpionfish	<i>Scorpaena calcarata</i> ^a	
Spotted scorpionfish	<i>Scorpaena Mystes</i> ^b	
Sargassum nudibranch	<i>Scyllaea pelagica</i> ^b	
Ridged slipper lobster	<i>Scyllarides nodifer</i> ^a	
Chace slipper lobster	<i>Scyllarus chacei</i> ^a	
Scaled slipper lobster	<i>Scyllarus depressus</i> ^a	
Bigeye scad	<i>Selar crumenophthalmus</i> ^{a,b}	
Atlantic moonfish	<i>Selene setapinnis</i> ^{a,b}	
Lookdown	<i>Selene vomer</i> ^{a,b}	
Greater amberjack	<i>Seriola dumerilii</i> ^{a,b}	
Banded rudderfish	<i>Seriola zonata</i> ^a	
Pygmy sea bass	<i>Serraniculus pumilio</i> ^{a,b}	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Blackear bass	<i>Serranus atrobranchus</i> ^a	
Saddle bass	<i>Serranus notospilus</i> ^a	
Tattler	<i>Serranus phoebe</i> ^a	
Belted sandfish	<i>Serranus subligarius</i> ^{a,b}	
Brown rock shrimp	<i>Sicyonia brevirostris</i> ^{a,b}	
Spiny rock shrimp	<i>Sicyonia burkenroadi</i> ^a	
Lesser rock shrimp	<i>Sicyonia dorsalis</i> ^{a,b}	
Kinglet rock shrimp	<i>Sicyonia typica</i> ^a	
Lightning whelk	<i>Sinistrofulgur perversum</i> ^b	
White baby ear	<i>Sinum perspectivum</i> ^b	
NA	<i>Skeletonema costatum</i> ^f	Phytoplankton species
NA	<i>Soleidae</i> ^g	True sole family
Heart urchin	<i>Spatangoida</i> ^b	
Gulf squareback crab	<i>Speocarcinus lobatus</i> ^{a,b}	
Marbled puffer	<i>Sphoeroides dorsalis</i> ^a	
Southern puffer	<i>Sphoeroides nephelus</i> ^a	
Least puffer	<i>Sphoeroides parvus</i> ^{a,b}	
Bandtail puffer	<i>Sphoeroides spengleri</i> ^a	
Great barracuda	<i>Sphyraena barracuda</i> ^b	
Northern sennet	<i>Sphyraena borealis</i> ^a	
Guachanche barracuda	<i>Sphyraena guachancho</i> ^{a,b}	
Family barracudas	<i>Sphyraenidae</i> ^b	
Bonnethead	<i>Sphyrna tiburo</i> ^{a,b}	
NA	<i>Spirulina sp.</i> ^e	Phytoplankton species
Atlantic thorny oyster	<i>Spondylus americanus</i> ^a	
Sand devil	<i>Squatina dumeril</i> ^a	
Offshore mantis shrimp	<i>Squilla chydrea</i> ^{a,b}	
Mantis shrimp	<i>Squilla deceptrix</i> ^a	
Mantis shrimp	<i>Squilla empusa</i> ^a	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Mantis shrimp	<i>Squilla neglecta</i> ^a	
Mantis shrimp	<i>Squilla rugosa</i> ^a	
Luminous hake	<i>Steindachneria argentea</i> ^a	
Star drum	<i>Stellifer lanceolatus</i> ^{a,b}	
Atlantic Spotted Dolphin	<i>Stenella frontalis</i> ^b	T (Federal), T (TX State)
Rough-toothed dolphin	<i>Steno bredanensis</i> ^a	MMPA Protected (Federal), T (TX State)
Furcate spider crab	<i>Stenocionops coelata</i> ^a	
Furcate spider crab	<i>Stenocionops furcatus</i> ^a	
Prickly spider crab	<i>Stenocionops spinimanus</i> ^a	
Yellowline arrow crab	<i>Stenorhynchus seticornis</i> ^{a,b}	
Longspine porgy	<i>Stenotomus caprinus</i> ^{a,b}	
Planehead filefish	<i>Stephanolepis hispidus</i> ^{a,b}	
Common mantis shrimp	<i>Stomatopoda</i> ^b	
Cannonball jelly or cabbagehead	<i>Stomolophus meleagris</i> ^b	
Hays' rocksnail	<i>Stramonita canaliculata</i> ^b	
Florida rocksnail	<i>Stramonita haemastoma</i> ^b	
Florida fighting conch	<i>Strombus alatus</i> ^b	
Wrinkled sea squirt	<i>Styela plicata</i> ^a	
Pencil urchin	<i>Stylocidaris affinis</i> ^a	
Shoal flounder	<i>Syacium gunteri</i> ^{a,b}	
Dusky flounder	<i>Syacium papillosum</i> ^a	
Offshore tonguefish	<i>Symphurus civitatum</i> ^a	
Spottedfin tonguefish	<i>Symphurus diomedeanus</i> ^a	
Blackcheek tonguefish	<i>Symphurus plagiusa</i> ^{a,b}	
Spottail tonguefish	<i>Symphurus urospilus</i> ^a	
Chain pipefish	<i>Syngnathus louisianae</i> ^b	
Sargassum pipefish	<i>Syngnathus pelagicus</i> ^b	
Gulf pipefish	<i>Syngnathus scovelli</i> ^b	
Inshore lizardfish	<i>Synodus foetens</i> ^{a,b}	

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
Sand diver	<i>Synodus intermedius</i> ^a	
Offshore lizardfish	<i>Synodus poeyi</i> ^{a,b}	
Box jelly	<i>Tamoya haplonema</i> ^a	
NA	<i>Temora stylifera</i> ^e	Zooplankton species
Sea star	<i>Tethyaster grandis</i> ^a	
Atlantic bluefin tuna	<i>Thunnus thynnus</i> ^g	
NA	<i>Thunnus</i> ^g	True tuna genus
Giant tun	<i>Tonna galea</i> ^{a,b}	
Arrow shrimp	<i>Tozeuma carolinense</i> ^b	
Snakefish	<i>Trachinocephalus myops</i> ^a	
Florida pompano	<i>Trachinotus carolinus</i> ^b	
Permit	<i>Trachinotus falcatus</i> ^b	
Rough scad	<i>Trachurus lathami</i> ^{a,b}	
Roughback shrimp	<i>Trachycaris rugosa</i> ^b	
West Indian Manatee	<i>Trichecus manatus</i> ^c	T (Federal), T (TX State)
Atlantic cutlassfish	<i>Trichiurus lepturus</i> ^{a,b}	
Sash flounder	<i>Trichopsetta ventralis</i> ^a	
Family searobins	<i>Triglidae</i> ^b	
Hogchoker	<i>Trinectes maculatus</i> ^b	
Horse conch	<i>Triplofusus giganteus</i> ^b	
Squatter pea crab	<i>Tumidotheres maculatus</i> ^b	
Dwarf goatfish	<i>Upeneus parvus</i> ^{a,b}	
Gulf hake	<i>Urophycis cirrata</i> ^a	
Southern hake	<i>Urophycis floridana</i> ^{a,b}	
Spotted hake	<i>Urophycis regia</i> ^a	
Olive Nerite	<i>Vitta usnea</i> ^d	
Atlantic seabob	<i>Xiphopenaeus kroyeri</i> ^{a,b}	
Pearly razorfish	<i>Xyrichtys novacula</i> ^a	
Goose-beaked whale	<i>Ziphius cavirostris</i> ^a	MMPA Protected (Federal), T (TX State)

Appendix A. Comprehensive List of All Fish and Invertebrate Species That May Occur in the Gulf of Mexico around the Project Area

Species	Scientific Name	Notes
---------	-----------------	-------

Notes:

NA = not available, no common name currently available or not enough information to determine scientific name

^a Data source: NOAA Fisheries. 2022. DisMAP data records. Retrieved from apps-st.fisheries.noaa.gov/dismap/DisMAP.html. Accessed August 2022

^b Data source: TPWD, Coastal Fisheries Division, Correspondence dated August 30, 2022

^c Data source: IPaC, NOAA and/or TPWD

^d Data source: Bluewater Benthic Survey Report (Appendix L) - stations 10 and 14.

^e Data source: Holland et al. 1973, subset known to occur in marine and coastal areas

^f Data source: Holland et al. 1974, subset known to occur in marine and coastal areas

^g Data source: SEAMAP ichthyoplankton dataset

Appendix B

Abundant Species Based on Catch Data

Appendix B

Appendix B includes the abundant species noted in either the National Oceanic and Atmospheric Administration (NOAA) bottom trawl survey data (Table B-1) or the Texas Parks and Wildlife Department (TPWD) survey data (Table B-2). Selection criteria for inclusion from the survey data followed similar methods for each data source. Both the NOAA and TPWD data sets included species name, common name, a relative measure of abundance, and various other data columns. For this analysis, we were interested in identifying the most abundant species from each data set and used either the weight catch per unit effort (“WTCPUE”) column for the NOAA data, or the sum catch per hour (“Sum_Catch_Per_Hour”) column from the TPWD data set.

We applied the following data processing steps for the NOAA data set:

- Exclude rows with WTCPUE < 0.
- For species with multiple WTCPUE values > 0, keep maximum recorded value.
- Check species name and common name for accuracy.
- Identify major taxonomic group (e.g., invertebrate, vertebrate, family) using publicly available databases (e.g., fishbase.org, noaa.gov/species-directory).
- Identify habitat preference (e.g., demersal, pelagic) using above listed resources.
- Sort by species group (invertebrate, vertebrate), and WTCPUE.

We applied the following data processing steps for the TPWD data set:

- Exclude rows with Sum_Catch_Per_Hour < 0.
- Merge species scientific names from Appendix B-1 with common names from TPWD data set. TPWD data did not include scientific names.
- Identify major species taxonomic group (invertebrate, vertebrate).
- Sort by species group (invertebrate, vertebrate), and WTCPUE.

Table B-1. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from NOAA Bottom Trawl Data

Organism Type	Species	Scientific Name	WTCPUE Max
Invertebrate	Lesser blue crab	<i>Callinectes similis</i>	9.23843
Invertebrate	Brown shrimp	<i>Penaeus aztecus</i>	6.38353
Invertebrate	Northern white shrimp	<i>Litopenaeus setiferus</i>	2.39969
Invertebrate	Slender inshore squid	<i>Loligo pleii</i>	1.16730
Invertebrate	Atlantic brief squid	<i>Lolliguncula brevis</i>	0.81260
Invertebrate	Longfin inshore squid	<i>Loligo pealeii</i>	0.52610
Invertebrate	Mantis shrimp	<i>Squilla empusa</i>	0.49496
Invertebrate	Sea nettle	<i>Chrysaora quinquecirrha</i>	0.21683
Invertebrate	Blue crab	<i>Callinectes sapidus</i>	0.16698
Invertebrate	Longspine swimming crab	<i>Achelous spinicarpus</i>	0.15353
Invertebrate	Sea star species	<i>Astropecten cingulatus</i>	0.14861
Invertebrate	Stilt spider crab	<i>Anasimus latus</i>	0.12630
Invertebrate	Lined sea star	<i>Luidia clathrata</i>	0.08792
Invertebrate	Sea pansy	<i>Renilla mulleri</i>	0.07192
Invertebrate	Mantis shrimp	<i>Squilla neglecta</i>	0.06561
Invertebrate	Portly spider crab	<i>Libinia emarginata</i>	0.06266
Invertebrate	Northern pink shrimp	<i>Penaeus duorarum</i>	0.04535
Invertebrate	Rose shrimp	<i>Parapenaeus politus</i>	0.04298
Invertebrate	Schwengel pitar	<i>Pitar cordatus</i>	0.04199
Invertebrate	Speckled swimming crab	<i>Arenaeus cribrarius</i>	0.04039
Invertebrate	Atlantic seabob	<i>Xiphopenaeus kroyeri</i>	0.03290
Invertebrate	Paper scallop	<i>Amusium papyraceum</i>	0.02985
Invertebrate	Calico box crab	<i>Hepatus epheliticus</i>	0.02460
Invertebrate	Yellow box crab	<i>Calappa sulcata</i>	0.01842
Invertebrate	Iridescent swimming crab	<i>Portunus gibbesii</i>	0.01807
Invertebrate	Two-spined star fish	<i>Astropecten duplicatus</i>	0.01669
Invertebrate	Blotched swimming crab	<i>Achelous spinimanus</i>	0.01542
Invertebrate	Mottled purse crab	<i>Persephona mediterranea</i>	0.01509
Invertebrate	Offshore mantis shrimp	<i>Squilla chydrea</i>	0.01311
Invertebrate	Gulf frog crab	<i>Raninoides louisianensis</i>	0.00820
Invertebrate	White elbow crab	<i>Leiolambrus nitidus</i>	0.00681
Invertebrate	Pink purse crab	<i>Persephona crinita</i>	0.00591
Invertebrate	Skewed ark	<i>Anadara baughmani</i>	0.00354
Invertebrate	Hermit anemone	<i>Calliactis tricolor</i>	0.00285
Invertebrate	Flecked squareback crab	<i>Pseudorhombila quadridentata</i>	0.00164
Invertebrate	NA	<i>Iliacantha liodactylus</i>	0.00164
Invertebrate	Fivespine purse crab	<i>Myropsis quinquespinosa</i>	0.00164
Invertebrate	Lesser rock shrimp	<i>Sicyonia dorsalis</i>	0.00098
Invertebrate	Sargassum swimming crab	<i>Portunus sayi</i>	0.00095
Invertebrate	Spotted porcelain crab	<i>Porcellana sayana</i>	0.00033

Table B-1. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from NOAA Bottom Trawl Data

Organism Type	Species	Scientific Name	WTCPUE Max
Vertebrate	Atlantic croaker	<i>Micropogonias undulatus</i>	65.33847
Vertebrate	Gulf butterfish	<i>Peprilus burti</i>	9.95229
Vertebrate	Spot	<i>Leiostomus xanthurus</i>	6.17542
Vertebrate	Banded drum	<i>Larimus fasciatus</i>	5.86193
Vertebrate	Atlantic thread herring	<i>Opisthonema oglinum</i>	5.40618
Vertebrate	Atlantic moonfish	<i>Selene setapinnis</i>	4.62739
Vertebrate	Atlantic cutlassfish	<i>Trichiurus lepturus</i>	4.46523
Vertebrate	Southern kingfish	<i>Menticirrhus americanus</i>	3.82975
Vertebrate	Hardhead catfish	<i>Ariopsis felis</i>	2.72419
Vertebrate	Atlantic bumper	<i>Chloroscombrus chrysurus</i>	2.32954
Vertebrate	Rough scad	<i>Trachurus lathami</i>	2.32600
Vertebrate	Lesser electric ray	<i>Narcine brasiliensis</i>	2.04183
Vertebrate	Gulf menhaden	<i>Brevoortia patronus</i>	2.02497
Vertebrate	Longspine porgy	<i>Stenotomus caprinus</i>	1.96605
Vertebrate	Bonnethead	<i>Sphyrna tiburo</i>	1.45809
Vertebrate	Striped anchovy	<i>Anchoa hepsetus</i>	1.27155
Vertebrate	Pinfish	<i>Lagodon rhomboides</i>	1.01366
Vertebrate	Bluntnose jack	<i>Hemicaranx amblyrhynchus</i>	0.93856
Vertebrate	Inshore lizardfish	<i>Synodus foetens</i>	0.88576
Vertebrate	Scaled sardine	<i>Harengula jaguana</i>	0.82900
Vertebrate	Atlantic sharpnose shark	<i>Rhizoprionodon terraenovae</i>	0.79718
Vertebrate	Bigeye searobin	<i>Prionotus longispinosus</i>	0.57787
Vertebrate	Red snapper	<i>Lutjanus campechanus</i>	0.55059
Vertebrate	Red snapper	<i>Lutjanus campechanus</i>	0.55059
Vertebrate	Shoal flounder	<i>Syacium gunteri</i>	0.51216
Vertebrate	Star drum	<i>Stellifer lanceolatus</i>	0.45427
Vertebrate	Mexican flounder	<i>Cyclopsetta chittendeni</i>	0.40618
Vertebrate	Harvestfish	<i>Peprilus paru</i>	0.35791
Vertebrate	Rock sea bass	<i>Centropristis philadelphica</i>	0.25228
Vertebrate	Summer flounder (Southern flounder)	<i>Paralichthys lethostigma</i>	0.19657
Vertebrate	Gafftopsail catfish	<i>Bagre marinus</i>	0.18535
Vertebrate	Ocellated flounder	<i>Ancylopsetta ommata</i>	0.17846
Vertebrate	Dwarf sand perch	<i>Diplectrum bivittatum</i>	0.17620
Vertebrate	Crested cusk-eel	<i>Ophidion welshi</i>	0.15878
Vertebrate	Dwarf goatfish	<i>Upeneus parvus</i>	0.15550
Vertebrate	Fringed flounder	<i>Etropus crossotus</i>	0.14369
Vertebrate	Atlantic midshipman	<i>Porichthys plectrodon</i>	0.13385
Vertebrate	Blue runner	<i>Caranx crysos</i>	0.12775
Vertebrate	Spottedfin tonguefish	<i>Symphurus diomedeanus</i>	0.12007
Vertebrate	Bighead searobin	<i>Prionotus tribulus</i>	0.11719

Table B-1. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from NOAA Bottom Trawl Data

Organism Type	Species	Scientific Name	WTCPUE Max
Vertebrate	Smooth puffer	<i>Lagocephalus laevigatus</i>	0.09283
Vertebrate	Spanish mackerel	<i>Scomberomorus maculatus</i>	0.09047
Vertebrate	Blackedge cusk-eel	<i>Lepophidium brevibarbe</i>	0.07677
Vertebrate	Gray triggerfish	<i>Balistes capriscus</i>	0.07529
Vertebrate	Mexican searobin	<i>Prionotus paralatus</i>	0.06069
Vertebrate	Largescale lizardfish	<i>Saurida brasiliensis</i>	0.05067
Vertebrate	Blackcheek tonguefish	<i>Symphurus plagiusa</i>	0.04641
Vertebrate	Bay whiff	<i>Citharichthys spilopterus</i>	0.04298
Vertebrate	Blackfin searobin	<i>Prionotus rubio</i>	0.02723
Vertebrate	Slantbrow batfish	<i>Ogcocephalus declivirostris</i>	0.02268
Vertebrate	Sash flounder	<i>Trichopsetta ventralis</i>	0.01936
Vertebrate	King mackerel	<i>Scomberomorus cavalla</i>	0.01867
Vertebrate	Offshore tonguefish	<i>Symphurus civitatum</i>	0.01701
Vertebrate	Spiny flounder	<i>Engyophrys senta</i>	0.00992
Vertebrate	Shortwing searobin	<i>Prionotus stearnsi</i>	0.00949
Vertebrate	Wenchman	<i>Pristipomoides aquilonaris</i>	0.00886
Vertebrate	Bigeye scad	<i>Selar crumenophthalmus</i>	0.00886
Vertebrate	Striped burrfish	<i>Chilomycterus schoepfii</i>	0.00755
Vertebrate	Planehead filefish	<i>Stephanolepis hispida</i>	0.00696
Vertebrate	Ragged goby	<i>Bollmannia communis</i>	0.00525
Vertebrate	Bearded brotula	<i>Brotula barbata</i>	0.00425
Vertebrate	Silver jenny	<i>Eucinostomus gula</i>	0.00316
Vertebrate	Bay anchovy	<i>Anchoa mitchilli</i>	0.00295
Vertebrate	Least puffer	<i>Sphoeroides parvus</i>	0.00230
Vertebrate	Fringed sole	<i>Gymnachirus texae</i>	0.00213
Vertebrate	Spiny searobin	<i>Prionotus alatus</i>	0.00142
Vertebrate	Antenna codlet	<i>Bregmaceros atlanticus</i>	0.000354302

Source: NOAA Fisheries. 2022. DisMAP data records. Retrieved from apps-st.fisheries.noaa.gov/dismap/DisMAP.html. Accessed August 2022

Notes:

WTCPUE = weight catch per unit effort

Table B-2. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from TPWD Data

Organism Type	Species	Scientific Name	Sum Catch Per Hour
Invertebrate	Sea pansy	<i>Renilla mulleri</i>	653139
Invertebrate	Atlantic brief squid	<i>Lolliguncula brevis</i>	340750
Invertebrate	Roughback shrimp	<i>Trachycaris rugosa</i>	249347
Invertebrate	Moon jelly	<i>Aurelia aurita</i>	170918
Invertebrate	Brown shrimp	<i>Penaeus aztecus</i>	158258
Invertebrate	Lesser blue crab	<i>Callinectes similis</i>	137300
Invertebrate	Lined sea star (or striped sea star)	<i>Luidia clathrata</i>	105644
Invertebrate	Northern white shrimp	<i>Litopenaeus setiferus</i>	104092
Invertebrate	Slender inshore squid	<i>Loligo pleii</i>	57605
Invertebrate	Common mantis shrimp	<i>Stomatopoda</i>	51206
Invertebrate	Longfin inshore squid	<i>Loligo pealeii</i>	50509
Invertebrate	Iridescent swimming crab	<i>Portunus gibbesii</i>	45812
Invertebrate	Five-holed sand dollar	<i>Mellita quinquiesperforata</i>	45409
Invertebrate	Rimapenaeid shrimp - unidentified	<i>Rimapenaeus</i> spp.	38929
Invertebrate	Order anemones	<i>Actiniaria</i>	29557
Invertebrate	Pink shrimp	<i>Farfantepenaeus duorarum</i>	22739
Invertebrate	Lesser rock shrimp	<i>Sicyonia dorsalis</i>	15535
Invertebrate	Roughneck shrimp	<i>Rimapenaeus constrictus</i>	13449
Invertebrate	Two-spined star fish	<i>Astropecten duplicatus</i>	12457
Invertebrate	Sea nettle	<i>Chrysaora quinquecirrha</i>	10120
Invertebrate	Pink purse crab	<i>Persephona crinita</i>	9078
Invertebrate	Atlantic seabob	<i>Xiphopenaeus kroyeri</i>	8459
Invertebrate	Longnose spider crab	<i>Libinia dubia</i>	7208
Invertebrate	Cannonball jelly or cabbagehead	<i>Stomolophus meleagris</i>	7028
Invertebrate	Cancellate cantharus	<i>Cantharus cancellarius</i>	5060
Invertebrate	Flatclaw hermit	<i>Pagurus pollicaris</i>	4948
Invertebrate	Blue crab	<i>Callinectes sapidus</i>	4110
Invertebrate	Speckled swimming crab	<i>Arenaeus cribrarius</i>	3957
Invertebrate	Florida lady crab	<i>Ovalipes floridanus</i>	3918
Invertebrate	Banded sea star	<i>Luidia alternata</i>	3204
Invertebrate	Blotched swimming crab	<i>Achelous spinimanus</i>	2451
Invertebrate	Calico box crab	<i>Hepatus epheliticus</i>	2429
Invertebrate	Yellow box crab	<i>Calappa sulcata</i>	2206
Invertebrate	Mottled purse crab	<i>Persephona mediterranea</i>	1970
Invertebrate	Heart urchin	<i>Spatangoida</i>	1862
Invertebrate	Lesser mantis shrimp	<i>Gibbesia neglecta</i>	1796
Invertebrate	Moonsnail - unidentified	<i>Naticidae</i>	1567
Invertebrate	Lightning whelk	<i>Sinistrofulgur perversum</i>	1381
Invertebrate	Blood ark	<i>Anadara ovalis</i>	950
Invertebrate	Many-ribbed papillaed jellyfish	<i>Aequorea forskalea</i>	922
Invertebrate	Family mud crabs and swimming crabs	<i>Portunidae</i>	695
Invertebrate	Yellowline arrow crab	<i>Stenorhynchus seticornis</i>	669
Invertebrate	Sargassum swimming crab	<i>Portunus sayi</i>	573
Invertebrate	False arrow crab	<i>Metoporphaphis calcarata</i>	429
Invertebrate	Shark eye	<i>Neverita duplicata</i>	407
Invertebrate	Estuarine snapping shrimp	<i>Alpheus estuariensis</i>	405
Invertebrate	Florida rocksnail	<i>Stramonita haemastoma</i>	381
Invertebrate	White elbow crab	<i>Leiolambrus nitidus</i>	377
Invertebrate	Giant hermit	<i>Pentrochirus diogenes</i>	359
Invertebrate	Sea hare - unidentified	<i>Anaspidea</i>	311
Invertebrate	Spotted porcelain crab	<i>Porcellana sayana</i>	303

Table B-2. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from TPWD Data

Organism Type	Species	Scientific Name	Sum Catch Per Hour
Invertebrate	False shark eye	<i>Neverita delessertiana</i>	269
Invertebrate	Mottled sea hare	<i>Aplysia fasciata</i>	234
Invertebrate	Order nudibranchs and sea slugs	<i>Nudibranchia</i>	210
Invertebrate	Green porcelain crab	<i>Petrolisthes armatus</i>	204
Invertebrate	Class brittle stars	<i>Ophiuroidea</i>	198
Invertebrate	Brown rock shrimp	<i>Sicyonia brevirostris</i>	174
Invertebrate	Gulf grassflat crab	<i>Dyspanopeus texanus</i>	168
Invertebrate	Thinstripe hermit	<i>Clibanarius vittatus</i>	168
Invertebrate	Longwrist hermit	<i>Pagurus longicarpus</i>	156
Invertebrate	Offshore mantis shrimp	<i>Squilla chydrea</i>	150
Invertebrate	Gulf squareback crab	<i>Speocarcinus lobatus</i>	132
Invertebrate	Portly spider crab	<i>Libinia emarginata</i>	124
Invertebrate	Arrow shrimp	<i>Tozeuma carolinense</i>	102
Invertebrate	Brazilian armina	<i>Armina mulleri</i>	102
Invertebrate	Pearwhelk - unidentified	<i>Busycotypus sp.</i>	102
Invertebrate	White baby ear	<i>Sinum perspectivum</i>	98
Invertebrate	Mushroom jellyfish	<i>Rhopilema verrilli</i>	90
Invertebrate	Family elongate squids	<i>Histioteuthidae</i>	84
Invertebrate	Common sundial	<i>Architectonica perspectiva</i>	82
Invertebrate	Florida fighting conch	<i>Strombus alatus</i>	78
Invertebrate	Oystershell mud crab	<i>Panopeus simpsoni</i>	78
Invertebrate	Class starfishes	<i>Asteroidea</i>	66
Invertebrate	Giant tun	<i>Tonna galea</i>	66
Invertebrate	Bigclaw snapping shrimp	<i>Alpheus heterochaelis</i>	60
Invertebrate	Scotch bonnet	<i>Phalium granulatum</i>	54
Invertebrate	Sargassum crab	<i>Portunus sayi</i>	48
Invertebrate	Smooth elbow crab	<i>Heterocrypta granulata</i>	48
Invertebrate	Squatter pea crab	<i>Tumidotheres maculatus</i>	48
Invertebrate	Beach mole crab	<i>Emerita spp.</i>	46
Invertebrate	Beach flea	<i>Orchestia spp.</i>	42
Invertebrate	Family penaeid shrimps	<i>Penaeidae</i>	42
Invertebrate	Family right-handed hermit crabs	<i>Paguridae</i>	42
Invertebrate	Flamingo tongue	<i>Cyphoma gibbosum</i>	42
Invertebrate	Pearwhelk	<i>Busycotypus spiratus</i>	42
Invertebrate	Peppermint shrimp	<i>Lysmata boggess</i>	42
Invertebrate	Gulf stone crab	<i>Menippe adina</i>	36
Invertebrate	Hairy sponge crab	<i>Dromidia antillensis</i>	36
Invertebrate	Ponderous ark	<i>Noetia ponderosa</i>	36
Invertebrate	Sea wasp	<i>Chironex fleckeri</i>	36
Invertebrate	Family pea crabs	<i>Pinnotheridae</i>	30
Invertebrate	Gulf frog crab	<i>Raninoides louisianensis</i>	30
Invertebrate	Lettered olive	<i>Oliva sayana</i>	30
Invertebrate	Common octopus	<i>Octopus vulgaris</i>	24
Invertebrate	Sargassum nudibranch	<i>Scyllaea pelagica</i>	24
Invertebrate	Shortfinger neck crab	<i>Podocheila sidneyi</i>	24
Invertebrate	Dimpled hermit	<i>Pagurus impressus</i>	18
Invertebrate	Family snapping shrimps	<i>Alpheidae</i>	18
Invertebrate	Family swimming crabs	<i>Portunidae</i>	18
Invertebrate	Four-tentacle box jelly	<i>Cubozoa</i>	18
Invertebrate	Hays' rocksnail	<i>Stramonita canaliculata</i>	18
Invertebrate	Puerto Rican sand crab	<i>Emerita portoricensis</i>	18

Table B-2. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from TPWD Data

Organism Type	Species	Scientific Name	Sum Catch Per Hour
Invertebrate	Sand snapping shrimp	<i>Alpheus floridanus</i>	18
Invertebrate	Western bay scallop	<i>Argopectin irradians amplicostatus</i>	18
Invertebrate	Yellow prickly cockle	<i>Dalocardia muricata</i>	18
Invertebrate	Atlantic giant cockle	<i>Dinocardium robustum</i>	16
Invertebrate	Atlantic distorsio	<i>Distorsio clathrata</i>	12
Invertebrate	Brown grass shrimp	<i>Leander tenuicornis</i>	12
Invertebrate	Clenches thick-ringed venus	<i>Lirophora clenchi</i>	12
Invertebrate	Flame box crab	<i>Calappa flammea</i>	12
Invertebrate	Florida cross-barred venus	<i>Chione elevata</i>	12
Invertebrate	Giant mantis shrimp	<i>Hemisquilla ensigera</i>	12
Invertebrate	Grass shrimp - unidentified	<i>Palaemonetes</i>	12
Invertebrate	Horse conch	<i>Triplofusus giganteus</i>	12
Invertebrate	Intermediate cyphoma	<i>Cyphoma intermedium</i>	12
Invertebrate	Redleg humpback shrimp	<i>Exhippolysmata oplophoroides</i>	12
Invertebrate	Sea cucumber	<i>Holothuroidea</i>	12
Invertebrate	Sea squirt	<i>Ascidacea</i>	12
Invertebrate	Swimming crab	<i>Portunidae</i>	12
Invertebrate	Texas quahog	<i>Mercenaria texana</i>	12
Invertebrate	Texas venus	<i>Agriopoma texasiana</i>	12
Vertebrate	Atlantic bumper	<i>Chloroscombrus chrysurus</i>	672642
Vertebrate	Atlantic croaker	<i>Micropogonias undulatus</i>	610649
Vertebrate	Silver seatrout	<i>Cynoscion nothus</i>	376080
Vertebrate	Gulf butterfish	<i>Peprilus burti</i>	238298
Vertebrate	Sand seatrout	<i>Cynoscion arenarius</i>	198466
Vertebrate	Spot	<i>Leiostomus xanthurus</i>	142321
Vertebrate	Shoal flounder	<i>Syacium gunteri</i>	123128
Vertebrate	Banded drum	<i>Larimus fasciatus</i>	110602
Vertebrate	Atlantic moonfish	<i>Selene setapinnis</i>	81108
Vertebrate	Star drum	<i>Stellifer lanceolatus</i>	74068
Vertebrate	Longspine porgy	<i>Stenotomus caprinus</i>	69609
Vertebrate	Atlantic threadfin	<i>Polydactylus octonemus</i>	42953
Vertebrate	Pinfish	<i>Lagodon rhomboides</i>	41275
Vertebrate	Red snapper	<i>Lutjanus campechanus</i>	35873
Vertebrate	Atlantic cutlassfish	<i>Trichiurus lepturus</i>	33440
Vertebrate	Hardhead catfish	<i>Ariopsis felis</i>	31195
Vertebrate	Striped anchovy	<i>Anchoa hepsetus</i>	27479
Vertebrate	Harvestfish	<i>Peprilus paru</i>	26158
Vertebrate	Blackfin searobin (also Blackwing searobin)	<i>Prionotus rubio</i>	23655
Vertebrate	Bay anchovy	<i>Anchoa mitchilli</i>	20367
Vertebrate	Southern kingfish	<i>Menticirrhus americanus</i>	18658
Vertebrate	Blackcheek tonguefish	<i>Symphurus plagiusa</i>	17674
Vertebrate	Scaled sardine	<i>Harengula jaguana</i>	16861
Vertebrate	Fringed flounder	<i>Etropus crossotus</i>	15510
Vertebrate	Gafftopsail catfish	<i>Bagre marinus</i>	10096
Vertebrate	Bay whiff	<i>Citharichthys spilopterus</i>	9703
Vertebrate	Pigfish	<i>Orthopristis chrysoptera</i>	8779
Vertebrate	Dwarf goatfish	<i>Upeneus parvus</i>	8771
Vertebrate	Gulf menhaden	<i>Brevoortia patronus</i>	7509
Vertebrate	Least puffer	<i>Sphoeroides parvus</i>	6795
Vertebrate	Bigeye searobin	<i>Prionotus longispinosus</i>	6790

Table B-2. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from TPWD Data

Organism Type	Species	Scientific Name	Sum Catch Per Hour
Vertebrate	Atlantic spadefish	<i>Chaetodipterus faber</i>	6032
Vertebrate	Southern hake	<i>Urophycis floridana</i>	5824
Vertebrate	Rough scad	<i>Trachurus lathami</i>	5369
Vertebrate	Greater amberjack	<i>Seriola dumerili</i>	4952
Vertebrate	Silver perch	<i>Bairdiella chrysoura</i>	4950
Vertebrate	Lookdown	<i>Selene vomer</i>	4553
Vertebrate	Smooth puffer	<i>Lagocephalus laevigatus</i>	4549
Vertebrate	Silver mojarra (or spotfin mojarra)	<i>Eucinostomus argenteus</i>	4144
Vertebrate	Bighead searobin	<i>Prionotus tribulus</i>	4056
Vertebrate	Lane snapper	<i>Lutjanus synagris</i>	4036
Vertebrate	Pancake batfish	<i>Halieutichthys aculeatus</i>	4010
Vertebrate	Gray triggerfish	<i>Balistes capriscus</i>	3988
Vertebrate	Inshore lizardfish	<i>Synodus foetens</i>	3200
Vertebrate	Bluntnose jack	<i>Hemicaranx amblyrhynchus</i>	2816
Vertebrate	Dwarf sand perch	<i>Diplectrum bivittatum</i>	2637
Vertebrate	Barred grunt	<i>Conodon nobilis</i>	2130
Vertebrate	Silver jenny	<i>Eucinostomus gula</i>	2102
Vertebrate	Atlantic stingray	<i>Dasyatis sabina</i>	1815
Vertebrate	Lesser electric ray	<i>Narcine brasiliensis</i>	1713
Vertebrate	Planehead filefish	<i>Stephanolepis hispidus</i>	1671
Vertebrate	Largescale lizardfish	<i>Saurida brasiliensis</i>	1539
Vertebrate	King mackerel	<i>Scomberomorus cavalla</i>	1537
Vertebrate	Gulf kingfish	<i>Menticirrhus littoralis</i>	1485
Vertebrate	Mexican flounder	<i>Cyclopsetta chittendeni</i>	1449
Vertebrate	Atlantic thread herring	<i>Opisthonema oglinum</i>	1315
Vertebrate	Ocellated flounder	<i>Ancylopsetta ommata</i>	1260
Vertebrate	Rock sea bass	<i>Centropristis philadelphica</i>	1232
Vertebrate	Menhaden and Herrings- unidentified	<i>Clupeidae</i>	1156
Vertebrate	Lined seahorse	<i>Hippocampus erectus</i>	952
Vertebrate	Lined sole	<i>Achirus lineatus</i>	920
Vertebrate	Striped burrfish	<i>Chilomycterus schoepfii</i>	802
Vertebrate	Spanish mackerel	<i>Scomberomorus maculatus</i>	749
Vertebrate	Round herring	<i>Etrumeus teres</i>	731
Vertebrate	Threadfin shad	<i>Dorosoma petenense</i>	629
Vertebrate	Atlantic midshipman	<i>Porichthys plectrodon</i>	617
Vertebrate	Spanish sardine	<i>Sardinella aurita</i>	477
Vertebrate	Offshore lizardfish	<i>Synodus poeyi</i>	473
Vertebrate	Guachanche barracuda	<i>Sphyraena guachancho</i>	461
Vertebrate	Crevalle jack	<i>Caranx hippos</i>	449
Vertebrate	Leatherjack	<i>Oligoplites saurus</i>	383
Vertebrate	White mullet	<i>Mugil curema</i>	293
Vertebrate	Hogchoker	<i>Trinectes maculatus</i>	293
Vertebrate	Round scad	<i>Decapterus punctatus</i>	287
Vertebrate	Spotted batfish	<i>Ogcocephalus pantostictus</i>	281
Vertebrate	Crested cusk-eel	<i>Ophidion welshi</i>	264
Vertebrate	Orange filefish	<i>Aluterus schoepfii</i>	254
Vertebrate	Blue runner	<i>Caranx crysos</i>	228
Vertebrate	Red goatfish	<i>Mullus auratus</i>	216
Vertebrate	Southern flounder	<i>Paralichthys lethostigma</i>	204
Vertebrate	Ladyfish	<i>Elopidae</i>	204
Vertebrate	Family anchovies	<i>Engraulidae</i>	204

Table B-2. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from TPWD Data

Organism Type	Species	Scientific Name	Sum Catch Per Hour
Vertebrate	Family herrings	<i>Clupeidae</i>	192
Vertebrate	Polka-dot batfish	<i>Ogcocephalus radiatus</i>	192
Vertebrate	Bluespotted searobin	<i>Prionotus roseus</i>	186
Vertebrate	Highfin goby	<i>Gobionellus oceanicus</i>	180
Vertebrate	Gulf flounder	<i>Paralichthys albigutta</i>	174
Vertebrate	Finescale menhaden	<i>Brevoortia gunteri</i>	168
Vertebrate	Bonnethead	<i>Sphyrna tiburo</i>	168
Vertebrate	Fringed sole	<i>Gymnachirus texae</i>	160
Vertebrate	Black drum	<i>Pogonias cromis</i>	154
Vertebrate	Yellow conger	<i>Rhynchoconger flavus</i>	138
Vertebrate	Roughback batfish	<i>Ogcocephalus parvus</i>	138
Vertebrate	Southern stargazer	<i>Astroscopus y-graecum</i>	130
Vertebrate	Barbfish	<i>Scorpaena brasiliensis</i>	126
Vertebrate	Spotted seatrout	<i>Cynoscion nebulosus</i>	118
Vertebrate	Blackedge cusk-eel	<i>Lepophidium brevibarbe</i>	112
Vertebrate	Atlantic sharpnose shark	<i>Rhizoprionodon terraenovae</i>	108
Vertebrate	Gulf pipefish	<i>Syngnathus scovelli</i>	102
Vertebrate	Bluefish	<i>Pomatomus saltatrix</i>	96
Vertebrate	Smooth butterfly ray	<i>Gymnura micrura</i>	96
Vertebrate	Chain pipefish	<i>Syngnathus louisianae</i>	90
Vertebrate	Ragged goby	<i>Bollmannia communis</i>	78
Vertebrate	Blotched cusk-eel	<i>Ophidion grayi</i>	72
Vertebrate	Cobia	<i>Rachycentron canadum</i>	72
Vertebrate	Family batfishes	<i>Ogcocephalidae</i>	72
Vertebrate	Scrawled cowfish	<i>Acanthostracion quadricornis</i>	72
Vertebrate	Florida pompano	<i>Trachinotus carolinus</i>	66
Vertebrate	Inland silverside	<i>Menidia beryllina</i>	66
Vertebrate	Striped mullet	<i>Mugil cephalus</i>	66
Vertebrate	Dusky anchovy	<i>Anchoa lyolepis</i>	60
Vertebrate	Cownose ray	<i>Rhinoptera bonasus</i>	60
Vertebrate	Red Drum	<i>Sciaenops ocellatus</i>	60
Vertebrate	Roundel skate	<i>Raja texana</i>	60
Vertebrate	Sailfin molly	<i>Poecilia latipinna</i>	60
Vertebrate	Silverside - unidentified	<i>Menidia spp.</i>	60
Vertebrate	Southern stingray	<i>Hypanus americanus</i>	60
Vertebrate	Bigeye scad	<i>Selar crumenophthalmus</i>	52
Vertebrate	Spotted whiff	<i>Citharichthys macrops</i>	50
Vertebrate	Darter goby	<i>Ctenogobius boleosoma</i>	48
Vertebrate	Rough silverside	<i>Membras martinica</i>	48
Vertebrate	Shrimp eel	<i>Ophichthus gomesii</i>	48
Vertebrate	Bearded brotula	<i>Brotula barbata</i>	42
Vertebrate	Great barracuda	<i>Sphyrna barracuda</i>	42
Vertebrate	Palespotted eel	<i>Ophichthus puncticeps</i>	42
Vertebrate	Sargassumfish	<i>Histrio histrio</i>	42
Vertebrate	Warsaw grouper	<i>Hyporthodus nigrilus</i>	34
Vertebrate	Blackedge moray	<i>Gymnothorax nigromarginatus</i>	30
Vertebrate	Code goby	<i>Gobiosoma robustum</i>	30
Vertebrate	Little tunny	<i>Euthynnus alletteratus</i>	30
Vertebrate	Permit	<i>Trachinotus falcatus</i>	30
Vertebrate	Pygmy sea bass	<i>Serraniculus pumilio</i>	30
Vertebrate	Singlespot frogfish	<i>Antennarius radiosus</i>	30

Table B-2. Abundant and Common Fish and Invertebrate Species Captured in the General Vicinity of the Proposed Water Intake Structure from TPWD Data

Organism Type	Species	Scientific Name	Sum Catch Per Hour
Vertebrate	Sooty eel	<i>Bascanichthys bascanium</i>	30
Vertebrate	Spotted scorpionfish	<i>Scorpaena Mystes</i>	30
Vertebrate	Batfish - unidentified	NA	24
Vertebrate	Blacktip shark	<i>Carcharhinus limbatus</i>	24
Vertebrate	Bluntnose stingray	<i>Dasyatis say</i>	24
Vertebrate	Family jacks	<i>Carangidae</i>	24
Vertebrate	Leopard searobin	<i>Prionotus scitulus</i>	24
Vertebrate	Naked goby	<i>Gobiosoma bosc</i>	24
Vertebrate	Spotfin flounder	<i>Cyclopsetta fimbriata</i>	24
Vertebrate	Dwarf seahorse	<i>Hippocampus zosterae</i>	20
Vertebrate	African pompano	<i>Alectis ciliaris</i>	18
Vertebrate	Flagfin mojarra	<i>Eucinostomus melanopterus</i>	18
Vertebrate	Irish pompano	<i>Diapterus auratus</i>	18
Vertebrate	Loggerhead Sea Turtle	<i>Caretta caretta</i>	18
Vertebrate	Remora	<i>Carangiformes</i>	18
Vertebrate	Sand perch	<i>Diplectrum formosum</i>	18
Vertebrate	Sargassum pipefish	<i>Syngnathus pelagicus</i>	18
Vertebrate	Seatrout - unidentified	<i>Sciaenidae</i>	18
Vertebrate	Smallscale lizardfish	<i>Saurida caribbaea</i>	18
Vertebrate	Bandtail searobin	<i>Prionotus ophryas</i>	12
Vertebrate	Belted sandfish	<i>Serranus subligarius</i>	12
Vertebrate	Family barracudas	<i>Sphyraenidae</i>	12
Vertebrate	Family gobies	<i>Gobiidae</i>	12
Vertebrate	Family searobins	<i>Triglidae</i>	12
Vertebrate	Feather blenny	<i>Hypsoblennius hentz</i>	12
Vertebrate	Orangespotted filefish	<i>Cantherhines pullus</i>	12
Vertebrate	Scribbled leatherjacket filefish (or Scrawled filefish)	<i>Aluterus scriptus</i>	12
Vertebrate	Sheepshead	<i>Archosargus probatocephalus</i>	12
Vertebrate	Slippery dick	<i>Halichoeres bivittatus</i>	12
Vertebrate	Wenchman	<i>Pristipomoides aquilonaris</i>	12

Source: TPWD, Coastal Fisheries Division, Correspondence dated August 30, 2022

Appendix C

Correspondence with State Agency

Michele Abbene

From: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Sent: Tuesday, August 30, 2022 11:20 AM
To: Michele Abbene
Subject: RE: Request for Texas Coastal Fisheries Data
Attachments: CF-Mar-Res-Mon-Ops-Manual-2018.pdf; TRAWL_MA20_INVERTS.xlsx; TRAWL_MA20_VERTS.xlsx

[CAUTION: External email. Think before you click links or open attachments.]

Michele,

Attached is your requested data. You will find invertebrate data in the "...INVERTS.xlsx" file and vertebrates in the "...VERTS.xlsx" file.

A couple details on the sampling methodology. These samples were collected using otter trawls inside our Gulf sampling area MA20 ("Major Area 20")--this roughly corresponds to your request (i.e., adjacent to San Jose and Mustang Islands). Latitude and longitude are provided for each sample. This area does cover out to 10 miles, though with the lat and long information you should be able to coarse out data within 5 miles (as you requested). I've attached SOPs for TPWDs Fisheries Independent sampling program. This data was collected as part of the "Gulf Trawl" program that begins on page 35 of the attached document. Included in this document is gear specs of the sampling gear.

Some metadata for the attached excel spreadsheets:

- Data was available in this sampling area from 1985-present. The most recent data that you will see if from June 2022—we have not completed the editing process for data collected later than this and so it is not yet ready for public release.
- All trawl data is given as CPUE (catch/hour)—"ELASPED_TIME" is the time (in decimal hours) that was used to calculated the CPUE.
- Blanks in species column for CPUE indicate zero catch for that sample.
- Latitude and longitude is given relative to NAD83.
- All species are given by common names, but if you need clarification on any of these just let me know
- In an effort to make this a bit more manageable, I've removed all entries that only had a single record in the time series. I have also removed any entries that did not identify catch (taxonomically) below Class (e.g., I removed unidentified fishes that were entered at Class Ray Finned Fishes—Actinopterygii)

Please let me know if you have any questions on any of this.

Thanks,

Zach

Zachary Olsen
Texas Parks and Wildlife Department – Coastal Fisheries Division
Aransas Bay Ecosystem Leader
824 S. Fuqua St.
Rockport, Texas 78382
Office: 361.729.5429

From: Michele Abbene <mabbene@integral-corp.com>
Sent: Friday, August 26, 2022 10:08 AM
To: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Subject: Re: Request for Texas Coastal Fisheries Data

ALERT: This email came from an external source. Do not open attachments or click on links in unknown or unexpected emails.

Great, thank you!

MICHELE ABBENE

Tel: 225.346.9534 | Cell: 631.680.4650

INTEGRAL CONSULTING INC.

From: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>

Sent: Friday, August 26, 2022 10:07:00 AM

To: Michele Abbene <mabbene@integral-corp.com>

Subject: RE: Request for Texas Coastal Fisheries Data

[CAUTION: External email. Think before you click links or open attachments.]

Hi Michele,

I ran this by our Science Director and he approved the request—I'll start compiling this data for you ASAP.

Zach

Zachary Olsen

Texas Parks and Wildlife Department – Coastal Fisheries Division

Aransas Bay Ecosystem Leader

824 S. Fuqua St.

Rockport, Texas 78382

Office: 361.729.5429

From: Michele Abbene <mabbene@integral-corp.com>

Sent: Thursday, August 25, 2022 2:46 PM

To: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>

Subject: Request for Texas Coastal Fisheries Data

ALERT: This email came from an external source. Do not open attachments or click on links in unknown or unexpected emails.

Hi Zach,

Thanks for chatting with me yesterday. I am looking for fisheries data and benthic invertebrate data (if available) for the following:

Location: Aransas Pass area. Along Mustang Island and San Jose Island to 5 miles offshore.

Project Type: environmental assessment for intake structure (specifically impingement and entrainment)

Time Frame: all data (you mentioned as far back as 70s or 80s through present).

Please let me know if you have any additional questions.

Regards,

Michele

MICHELE ABBENE | Project Scientist

Tel: 225.346.9534 | Cell: 631.680.4650

8550 United Plaza Blvd., Suite 702 | Baton Rouge | LA 70809

mabbene@integral-corp.com | www.integral-corp.com



Michele Abbene

From: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Sent: Wednesday, September 14, 2022 4:12 PM
To: Michele Abbene
Subject: RE: Request for Texas Coastal Fisheries Data
Attachments: SEATURTLES_MA5_MA6_MA20.xlsx

[CAUTION: External email. Think before you click links or open attachments.]

Michele,

Attached is the requested data.

- Data is from 1980-present (when available) and for Major Area 5 (MA; Aransas Bay), MA 6 (Corpus Christi Bay), and MA 20 (Gulf of Mexico adjacent to these bay). These areas include all of the estuaries you mention below. The most recent data queried was from June 2022—we have not completed the editing process for data collected later than this and so it is not yet ready for public release.
- Data are from three different sampling gears (indicated in the “GEAR” column). Please refer to the SOP manual that I sent with the previous data request.
- Each row of data represents a single specimen.
- When length is available, it is given as mm.
- Latitude and longitude is given relative to NAD83.
- All species are given by common names, but if you need clarification on any of these, just let me know.

Please let me know if you have any questions here.

Zach

Zachary Olsen
Texas Parks and Wildlife Department – Coastal Fisheries Division
Aransas Bay Ecosystem Leader
824 S. Fuqua St.
Rockport, Texas 78382
Office: 361.729.5429

From: Michele Abbene <mabbene@integral-corp.com>
Sent: Monday, September 12, 2022 11:06 AM
To: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Subject: RE: Request for Texas Coastal Fisheries Data

ALERT: This email came from an external source. Do not open attachments or click on links in unknown or unexpected emails.

Hi Zach,

I have an additional request for the same project.

I would like to see records of all sea turtles that have been observed/caught in the estuary complex (e.g., Corpus Christi Bay, Redfish Bay, Aransas Bay, Copano Bay, Nueces Bay). Do you have information on the size or life stage of the turtles as well?

I did see a few turtles reported in the previous dataset. If there are additionally sea turtle records from the Gulf of Mexico area (besides the ones in the trawl data you already sent) or size information, please include those as well.

Please let me know if you require additional information to complete this request.

Thank you,
Michele

MICHELE ABBENE

Tel: 225.346.9534 | Cell: 631.680.4650

INTEGRAL CONSULTING INC.

From: Michele Abbene
Sent: Tuesday, August 30, 2022 1:34 PM
To: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Subject: RE: Request for Texas Coastal Fisheries Data

Received, thank you!

Regards,

From: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Sent: Tuesday, August 30, 2022 11:20 AM
To: Michele Abbene <mabbene@integral-corp.com>
Subject: RE: Request for Texas Coastal Fisheries Data

[CAUTION: External email. Think before you click links or open attachments.]

Michele,

Attached is your requested data. You will find invertebrate data in the "...INVERTS.xlsx" file and vertebrates in the "...VERTS.xlsx" file.

A couple details on the sampling methodology. These samples were collected using otter trawls inside our Gulf sampling area MA20 ("Major Area 20")--this roughly corresponds to your request (i.e., adjacent to San Jose and Mustang Islands). Latitude and longitude are provided for each sample. This area does cover out to 10 miles, though with the lat and long information you should be able to coarse out data within 5 miles (as you requested). I've attached SOPs for TPWDs Fisheries Independent sampling program. This data was collected as part of the "Gulf Trawl" program that begins on page 35 of the attached document. Included in this document is gear specs of the sampling gear.

Some metadata for the attached excel spreadsheets:

- Data was available in this sampling area from 1985-present. The most recent data that you will see if from June 2022—we have not completed the editing process for data collected later than this and so it is not yet ready for public release.
- All trawl data is given as CPUE (catch/hour)—"ELASPED_TIME" is the time (in decimal hours) that was used to calculated the CPUE.
- Blanks in species column for CPUE indicate zero catch for that sample.
- Latitude and longitude is given relative to NAD83.
- All species are given by common names, but if you need clarification on any of these just let me know
- In an effort to make this a bit more manageable, I've removed all entries that only had a single record in the time series. I have also removed any entries that did not identify catch (taxonomically) below Class (e.g., I removed unidentified fishes that were entered at Class Ray Finned Fishes—Actinopterygii)

Please let me know if you have any questions on any of this.

Thanks,
Zach

Zachary Olsen
Texas Parks and Wildlife Department – Coastal Fisheries Division
Aransas Bay Ecosystem Leader
824 S. Fuqua St.
Rockport, Texas 78382
Office: 361.729.5429

From: Michele Abbene <mabbene@integral-corp.com>
Sent: Friday, August 26, 2022 10:08 AM
To: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Subject: Re: Request for Texas Coastal Fisheries Data

ALERT: This email came from an external source. Do not open attachments or click on links in unknown or unexpected emails.

Great, thank you!

MICHELE ABBENE

Tel: 225.346.9534 | Cell: 631.680.4650

INTEGRAL CONSULTING INC.

From: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Sent: Friday, August 26, 2022 10:07:00 AM
To: Michele Abbene <mabbene@integral-corp.com>
Subject: RE: Request for Texas Coastal Fisheries Data

[CAUTION: External email. Think before you click links or open attachments.]

Hi Michele,

I ran this by our Science Director and he approved the request—I'll start compiling this data for you ASAP.

Zach

Zachary Olsen
Texas Parks and Wildlife Department – Coastal Fisheries Division
Aransas Bay Ecosystem Leader
824 S. Fuqua St.
Rockport, Texas 78382
Office: 361.729.5429

From: Michele Abbene <mabbene@integral-corp.com>
Sent: Thursday, August 25, 2022 2:46 PM
To: Zachary Olsen <Zachary.Olsen@tpwd.texas.gov>
Subject: Request for Texas Coastal Fisheries Data

ALERT: This email came from an external source. Do not open attachments or click on links in unknown or unexpected emails.

Hi Zach,

Thanks for chatting with me yesterday. I am looking for fisheries data and benthic invertebrate data (if available) for the following:

Location: Aransas Pass area. Along Mustang Island and San Jose Island to 5 miles offshore.

Project Type: environmental assessment for intake structure (specifically impingement and entrainment)

Time Frame: all data (you mentioned as far back as 70s or 80s through present).

Please let me know if you have any additional questions.

Regards,
Michele

MICHELE ABBENE | Project Scientist

Tel: 225.346.9534 | Cell: 631.680.4650

8550 United Plaza Blvd., Suite 702 | Baton Rouge | LA 70809

mabbene@integral-corp.com | www.integral-corp.com



Major A 5 = Aransas Bay; Major A 6 = Corpus Christi Bay, Major A 20 = Gulf of Mexico next to these bays

MAJOR_AR	MINOR_AR	STATION_CODE	GEAR	YEAR	MONTH	COMPLETION_DTTM	Y	X	COMMON_NAME	NUMBER_CAPTURED	LENGTH
6	260		4 Bag Seine	2009	10	10/26/2009 9:56	27.8842	-97.3447	Hawksbill seaturtle	1	46
6	130		114 Gill Net	2021	6	6/1/2021 10:26	27.8167	-97.1636	Green seaturtle	1	405
6	130		114 Gill Net	2021	6	6/1/2021 10:26	27.8167	-97.1636	Green seaturtle	1	399
6	130		212 Gill Net	2021	6	6/10/2021 7:34	27.7196	-97.3329	Green seaturtle	1	426
6	130		207 Gill Net	2020	11	11/4/2020 7:39	27.7413	-97.1605	Green seaturtle	1	374
6	130		207 Gill Net	2020	11	11/4/2020 7:39	27.7413	-97.1605	Green seaturtle	1	308
6	130		111 Gill Net	2020	9	9/23/2020 8:35	27.8215	-97.2155	Green seaturtle	1	459
6	130		94 Gill Net	2015	10	10/7/2015 8:49	27.8489	-97.1383	Green seaturtle	1	445
6	130		191 Gill Net	2016	5	5/25/2016 8:54	27.7633	-97.1647	Green seaturtle	1	580
6	130		156 Gill Net	2016	6	6/16/2016 8:45	27.7878	-97.1211	Green seaturtle	1	
6	130		156 Gill Net	2019	4	4/23/2019 8:39	27.7939	-97.1203	Green seaturtle	1	365
6	130		156 Gill Net	2019	4	4/23/2019 8:39	27.7939	-97.1203	Green seaturtle	1	367
6	130		159 Gill Net	2017	10	10/30/2017 9:03	27.7689	-97.3864	Green seaturtle	1	328
6	130		111 Gill Net	2017	10	10/23/2017 8:43	27.8217	-97.2158	Green seaturtle	1	442
6	130		227 Gill Net	2014	10	10/29/2014 8:10	27.7053	-97.2908	Green seaturtle	1	380
6	130		221 Gill Net	2014	10	10/8/2014 8:58	27.7289	-97.1828	Green seaturtle	1	369
6	130		116 Gill Net	2013	5	5/7/2013 7:28	27.8214	-97.1306	Green seaturtle	1	525
6	130		238 Gill Net	2013	5	5/6/2013 7:48	27.6969	-97.2519	Green seaturtle	1	268
6	130		90 Gill Net	2010	4	4/13/2010 7:56	27.8431	-97.2469	Green seaturtle	1	365
6	130		90 Gill Net	2009	10	10/6/2009 8:23	27.8364	-97.2417	Green seaturtle	1	300
6	130		173 Gill Net	2001	4	4/10/2001 10:44	27.7692	-97.1514	Loggerhead seaturtle	1	250
6	260		9 Gill Net	2019	5	5/28/2019 8:30	27.8731	-97.4547	Green seaturtle	1	284
6	284		55 Gill Net	2016	4	4/27/2016 8:35	27.8858	-97.1178	Green seaturtle	1	435
6	284		54 Gill Net	2016	4	4/27/2016 7:25	27.8919	-97.1339	Green seaturtle	1	
6	284		94 Gill Net	2015	6	6/10/2015 9:07	27.8492	-97.1414	Green seaturtle	1	370
6	284		93 Gill Net	2015	10	10/7/2015 7:48	27.8489	-97.1594	Green seaturtle	1	382
6	284		55 Gill Net	2017	5	5/16/2017 7:06	27.8914	-97.1331	Green seaturtle	1	415
6	284		54 Gill Net	2017	10	10/10/2017 8:30	27.8919	-97.1339	Green seaturtle	1	320
6	284		54 Gill Net	2017	10	10/10/2017 8:30	27.8919	-97.1339	Green seaturtle	1	325
6	284		54 Gill Net	2017	10	10/10/2017 8:30	27.8919	-97.1339	Green seaturtle	1	310
6	284		95 Gill Net	2017	9	9/26/2017 7:31	27.8442	-97.125	Green seaturtle	1	295
6	284		95 Gill Net	2017	9	9/26/2017 7:31	27.8442	-97.125	Green seaturtle	1	353
6	284		63 Gill Net	2011	4	4/26/2011 9:28	27.8697	-97.1539	Green seaturtle	1	285
6	284		65 Gill Net	2010	11	11/4/2010 7:40	27.8692	-97.1319	Green seaturtle	1	343
6	284		65 Gill Net	2011	10	10/26/2011 7:47	27.8681	-97.1328	Green seaturtle	1	450
6	284		77 Gill Net	2007	5	5/23/2007 6:57	27.8531	-97.1611	Green seaturtle	1	290
6	284		92 Gill Net	2001	4	4/20/2001 7:40	27.8364	-97.17	Green seaturtle	1	394

Major A 5 = Aransas Bay; Major A 6 = Corpus Christi Bay, Major A 20 = Gulf of Mexico next to these bays

MAJOR_AR	MINOR_AR	STATION_CODE	GEAR	YEAR	MONTH	COMPLETION_DTTM	Y	X	COMMON_NAME	NUMBER_CAPTURED	LENGTH
6	284	55	Gill Net	2000	4	4/27/2000 8:25	27.8894	-97.1303	Green seaturtle	1	280
5	20	262	Gill Net	2020	10	10/13/2020 7:29	28.0047	-97.057	Green seaturtle	1	404
5	20	152	Gill Net	2017	9	9/12/2017 10:59	28.1161	-96.9222	Green seaturtle	1	550
5	20	152	Gill Net	2017	9	9/12/2017 10:59	28.1161	-96.9222	Green seaturtle	1	562
5	20	95	Gill Net	2018	9	9/18/2018 8:45	28.1375	-97.0006	Green seaturtle	1	344
5	20	200	Gill Net	2011	4	4/21/2011 7:50	28.0667	-96.9625	Green seaturtle	1	386
5	20	178	Gill Net	2013	9	9/19/2013 8:36	28.0953	-96.9156	Green seaturtle	1	434
5	20	262	Gill Net	2001	5	5/10/2001 8:55	28.0042	-97.0561	Green seaturtle	1	344
5	20	323	Gill Net	1994	11	11/2/1994 6:44	27.9056	-97.0583	Green seaturtle	1	397
5	20	316	Gill Net	1993	5	5/25/1993 7:08	27.9181	-97.0181	Green seaturtle	1	280
5	120	248	Gill Net	2014	9	9/17/2014 8:13	28.0283	-97.125	Green seaturtle	1	353
5	250	81	Gill Net	2016	4	4/21/2016 7:36	28.1542	-96.8161	Green seaturtle	1	344
5	250	158	Gill Net	2017	5	5/11/2017 7:00	28.1136	-96.8247	Green seaturtle	1	274
5	250	132	Gill Net	2001	9	9/19/2001 9:43	28.1181	-96.8194	Green seaturtle	1	332
5	280	320	Gill Net	2015	10	10/19/2015 10:15	27.9006	-97.1064	Green seaturtle	1	332
5	280	284	Gill Net	2019	5	5/6/2019 8:38	27.9711	-97.0856	Green seaturtle	1	261
5	280	303	Gill Net	2019	4	4/29/2019 8:25	27.9339	-97.0864	Green seaturtle	1	287
5	280	321	Gill Net	2019	10	10/23/2019 8:33	27.9111	-97.0844	Green seaturtle	1	291
5	285	330	Gill Net	2019	10	10/23/2019 7:33	27.8967	-97.0872	Green seaturtle	1	286
6	130	241	Trawl	2008	2	2/7/2008 12:10	27.6925	-97.2064	Green seaturtle	1	
20	994	2075	Trawl	2010	10	10/18/2010 8:09	27.8428	-96.9858	Loggerhead seaturtle	1	
20	994	1968	Trawl	2010	7	7/6/2010 9:35	27.9722	-96.8878	Loggerhead seaturtle	1	890
20	994	2076	Trawl	2004	4	4/27/2004 9:15	27.8356	-96.9744	Loggerhead seaturtle	1	690
20	994	2148	Trawl	1997	7	7/16/1997 12:15	27.7417	-97.0583	Kemp's ridley seaturtle	1	600
5	120	186	Trawl	2019	9	9/6/2019 12:10	28.0781	-97.2058	Green seaturtle	1	350
5	250	79	Trawl	2020	12	12/7/2020 10:34	28.1561	-96.8404	Green seaturtle	1	376
5	250	56	Trawl	2013	8	8/21/2013 9:50	28.1722	-96.8411	Green seaturtle	1	500